
SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

AURAZZO
collection

1200 x 1800mm | 200 x 200mm

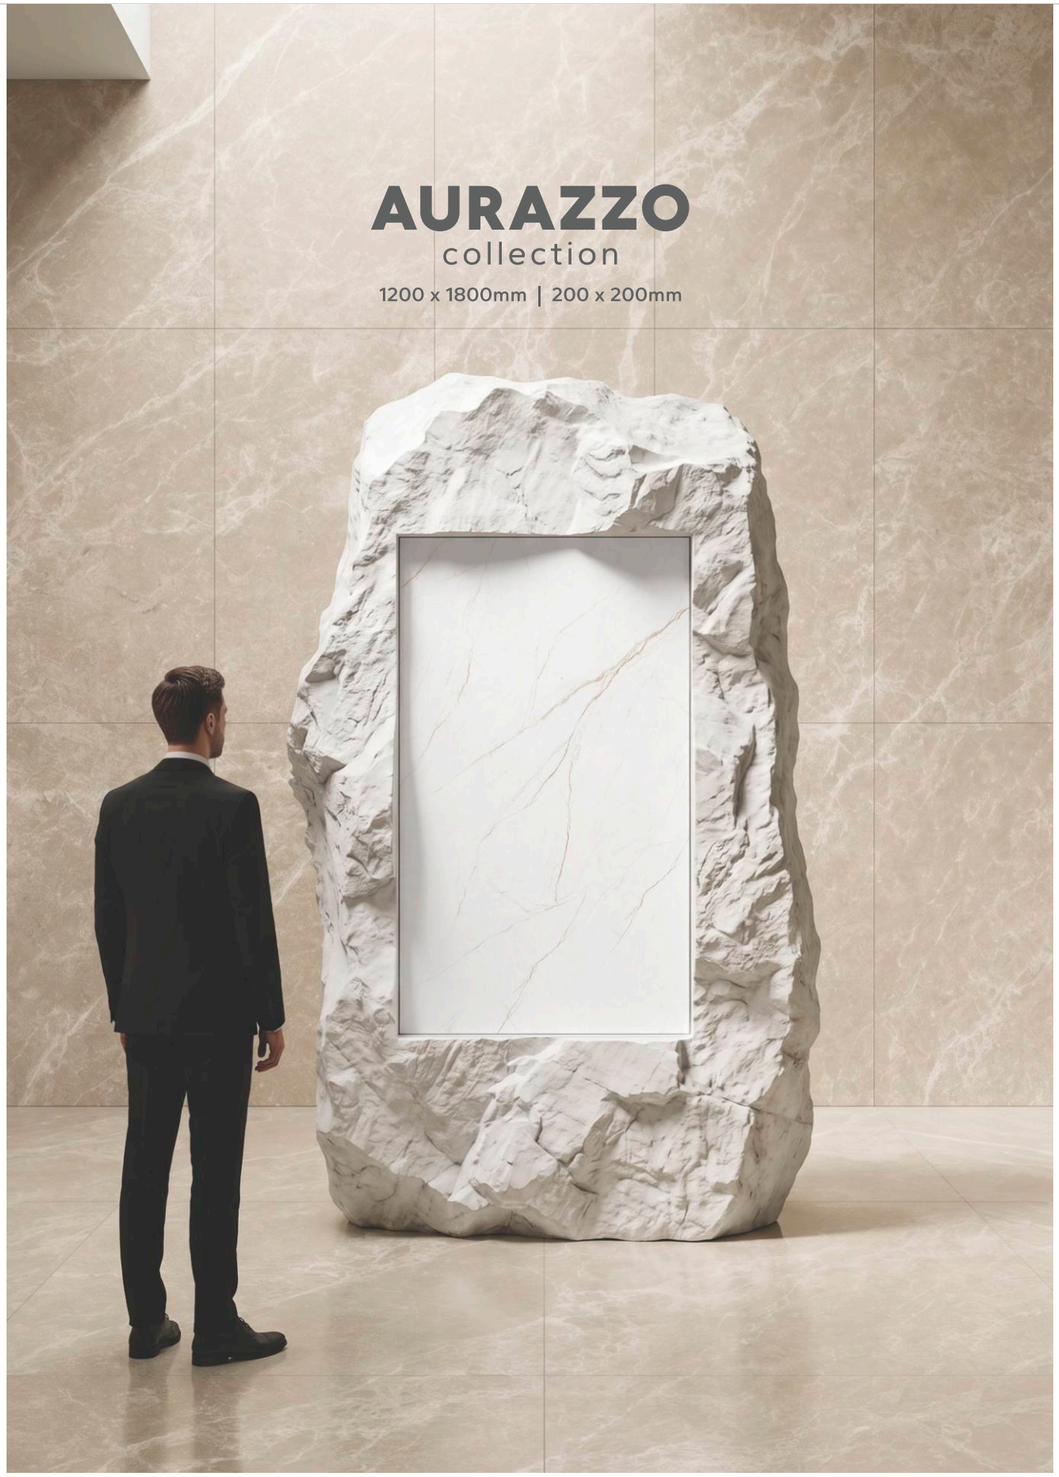

SOMANY

AURAZZO
collection

The AURAZZO Collection brings together the elegance of natural stone and the precision of modern craftsmanship. Featuring premium 1200 × 1800 mm large-format porcelain tiles with matching 200 × 200 mm décor tiles, it offers timeless designs for luxurious residential and commercial spaces. Engineered for superior durability, effortless maintenance, and lasting beauty, AURAZZO transforms every wall and floor into a statement of sophistication.



TECHNICAL FEATURES

- HIGH GLOSS SURFACE
- ABRASION RESISTANT (PEI-III & IV — ABRASION RESISTANT — FOR MODERATE TO HIGH TRAFFIC AREAS)
- EASY TO CLEAN
- CHEMICAL RESISTANT
- HYGIENIC SURFACE
- LOAD & STRESS RESISTANT
- TEMPERATURE RESISTANT
- WATER REPELLENT
- NON-REFLECTIVE
- ABRASION & WEAR RESISTANT
- THERMAL RESISTANT
- FROST RESISTANT

APPLICATION AREAS

- RESIDENTIAL AREAS
- COMMERCIAL AREAS
- HOSPITALS
- SHOPS AND MALLS
- PUBLIC PLACES
- HOTELS AND RESTAURANTS
- SCHOOLS AND COLLEGES
- OUTDOOR FURNITURE



WALL & FLOOR:

AURAZZO COSMO GREY EL 180
Size: 1200x1800mm | Thickness: 9mm | Surface: FULL POLISHED

COUNTER TABLE :

ENGRAVO JOLIET FUSION
Size: 200x200mm | Surface: ENGRAVO



AURAZZO
ACADIA BIANCO EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED | SOFTIQUE

ENGRAVO
VERACRUZ WHITE DECOR

Size: 200x200mm
Random: 36
Surface: ENGRAVO



AURAZZO
ACADIA BROWN EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED | SOFTIQUE



MORGAN
CREMA DECOR

Size: 200x200mm
Random: 6
Surface: MATT



AURAZZO
CLASSIC BIANCO EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED | SOFTIQUE

ENGRAVO
CIARA BROWN DECOR

Size: 200x200mm
Random: 7
Surface: ENGRAVO



AURAZZO
COSMO GREY EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED






ENGRAVO
JOLIET FUSION

Size: 200x200mm
Random: 12
Surface: ENGRAVO




AURAZZO
CREMA DORATA EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED

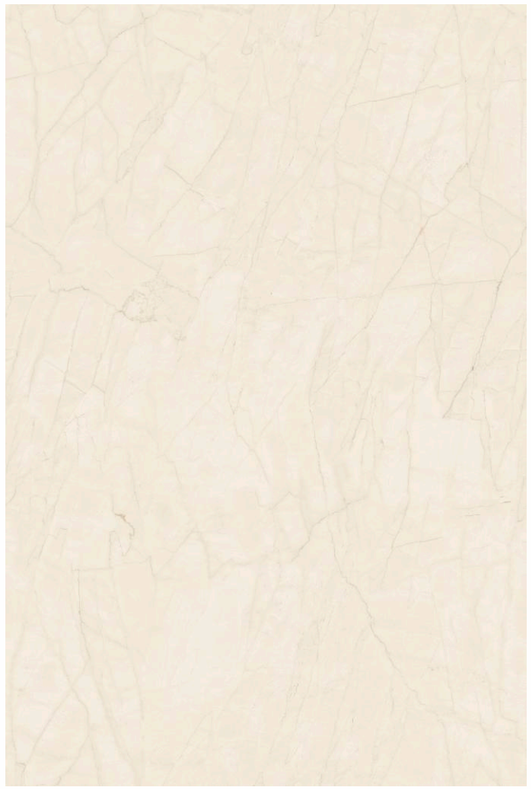

ENGRAVO
ANTICA CREMA DECO

Size: 200x200mm
Random: 9
Surface: ENGRAVO



AURAZZO
RAVENA GREY EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED | SOFTIQUE





ENGRAVO
CIARA AQUA DECOR

Size: 200x200mm
Random: 11
Surface: ENGRAVO





WALL & FLOOR:

AURAZZO MAJESTIC CREAM EL 180
Size: 1200x1800mm | Thickness: 9mm | Surface: FULL POLISHED

DECOR WALL :

ENGRAVO CIARA BROWN DECOR
Size: 200x200mm | Surface: ENGRAVO



AURAZZO
MAJESTIC CREAM EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED | SOFTIQUE

ENGRAVO
CIARA BROWN DECOR

Size: 200x200mm
Random: 7
Surface: ENGRAVO



AURAZZO
MAJESTIC CHOCO EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED





ENGRAVO
JOLIET FUSION

Size: 200x200mm
Random: 12
Surface: ENGRAVO



AURAZZO
ROYAL GOLD EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED | SOFTIQUE



GRIT
EMLYN BLACK DECOR

Size: 200x200mm
Random: 1
Surface: GRIT



AURAZZO
TUSCANY ORO EL 180

Size: 1200x1800mm
Thickness: 9mm
Surface: FULL POLISHED



ENGRAVO
OXIDE ETHNIC COPPER

Size: 200x200mm
Random: 5
Surface: ENGRAVO



AURAZZO
CEMENTO BRANCO 180 MT

Size: 1200x1800mm
Thickness: 9mm
Surface: RUSTIC MATT

VITRA
BIANCO DECOR

Size: 200x200mm
Random: 15
Surface: MATT



AURAZZO
CEMENTO GREY 180 MT

Size: 1200x1800mm
Thickness: 9mm
Surface: RUSTIC MATT





ENGRAVO
CIARA AQUA DECOR

Size: 200x200mm
Random: 11
Surface: ENGRAVO





WALL & FLOOR:

AURAZZO LITHOS GREY 180 MT
Size: 1200x1800mm | Thickness: 9mm | Surface: RUSTIC MATT

DECOR WALL :

GRIT EMLYN GREY DECOR
Size: 200x200mm | Surface: GRIT



AURAZZO
LITHOS BEIGE 180 MT

Size: 1200x1800mm
Thickness: 9mm
Surface: RUSTIC MATT





MORGAN
CREMA DECOR


Size: 200x200mm
Random: 6
Surface: MATT



AURAZZO
LITHOS GREY 180 MT

Size: 1200x1800mm
Thickness: 9mm
Surface: RUSTIC MATT



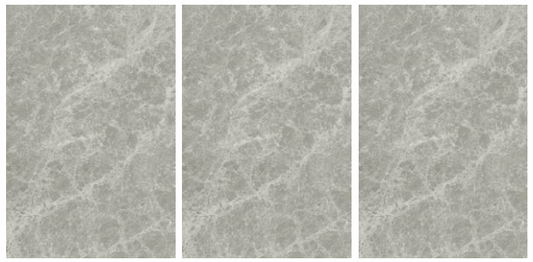

GRIT
EMLYN GREY DECOR

Size: 200x200mm
Random: 16
Surface: GRIT



AURAZZO
PEBBLE BLANCO 180 MT


Size: 1200x1800mm
Thickness: 9mm
Surface: RUSTIC MATT





ENGRAVO
DORIA MOSAICO NATURAL

Size: 200x200mm
Random: 4
Surface: ENGRAVO



WALL & FLOOR:

AURAZZO PEBBLE BLANCO 180 MT
Size: 1200x1800mm | Thickness: 9mm | Surface: RUSTIC MATT



TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR AURAZZO COLLECTION				
Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
1200x1800mm	9.0mm	90 kg	2	4.32Sq. mtr / 46.50 Sq. ft.

TECHNICAL SPECIFICATION FOR AURAZZO COLLECTION				
Characteristics	Requirement as per IS 15622:2017 <E≤0.08 Group BIa	Requirement as per ISO 13006 : 2018 ≤ 0.5% Group BIa	Our Value	Test Method
(A) Dimension & Surface Quality				IS 13630 Part 1 / ISO 10545-2
I) Length & Width	±0.1%	± 0.3%	±0.1%	
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	±0.1%	± 0.3%	± 0.1%	
iv) Rectangularity	±0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
b) Edge Curvature (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
c) Corner Warpage (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	Avg. ≤ 0.08% , Individual 0.1 Max	Avg. ≤ 0.5% , Individual 0.6% Max	Avg. ≤ 0.08%	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avg. 35 , Individual 32 Min	Avg. 35 , Individual 32 Min	Avg. > 35	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	Min. 1300 N	Min 1300 N	Min 1800 N	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	Min 5	NA	Min. 3	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle Passed	Class III (For Polished) Class IV (For Matt)	IS 13630 Part 11 / ISO 10545-7
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C	6X $10^{-6}K^{-1}$ Max	Test Method Available	6X 10^{-6} K^{-1} Max	IS 13630 Part 4 / ISO 10545-8
Viii) Thermal Resistant	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 Cycle @ 7.5bar Min	Required	4 Cycle Passed	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant as Coefficient of Restitution (COR)	0.55 Min	Test Method Available	Min 0.55	ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO-10545-12
C) Chemical Resistant (Glazed Tiles)				
I) Stain Resistant	Min Class 1	Min. Class 3	Min. Class 2 (For Polished) Min Class 1 (For Matt)	IS 13630 Part 8 / ISO 10545-14
ii) Resistant to Household Chemicals	Min Class AA	Min. Class B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Declared Value[1]	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

PACKAGING DETAIL FOR ARTIGIANO COLLECTION			
Nominal Size (mm)	Thickness (mm)	No. of Tiles Per Carton	Coverage Area Per Carton
200x200mm	11.5mm	15	0.60 Sq. mtr / 6.46 Sq. ft.

TECHNICAL SPECIFICATION FOR ARTIGIANO COLLECTION			
Characteristics	Requirement as per ISO 13006 : 2018 ≤ 0.5% Group BIa	Our Value	Test Method
(A) Dimension & Surface Quality			IS 13630 Part 1 / ISO 10545-2
I) Length & Width	± 0.3%	±0.1%	
ii) Thickness	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.3%	± 0.1%	
iv) Rectangularity	± 0.3%	± 0.1%	
v) Surface Flatness			
a) Center Curvature (%) (Max. Deviation)	± 0.4%	±0.2%	
b) Edge Curvature (%) (Max. Deviation)	± 0.4%	±0.2%	
c) Corner Warpage (%) (Max. Deviation)	± 0.4%	±0.2%	
vi) Surface Quality	95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	
B) Physical Properties			
I) Water Absorption	Avg. ≤ 0.5% , Individual 0.6% Max	Avg. 0.20%	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avg. 35 , Individual 32 Min	Avg. > 37	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	Min 1300 N	Min 1400 N	
iv) Moisture Expansion in mm/m	Test Method Available	0.02	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	NA	4 - 5	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Abrasion Class & Cycle Passed	Class IV	IS 13630 Part 11 / ISO 10545-7
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C	Test Method Available	5X 10^{-6} K^{-1} Max	IS 13630 Part 4 / ISO 10545-8
Viii) Thermal Resistant	Test Method Available	10 Cycle Passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	Required	4 Cycle Passed	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant as Coefficient of Restitution (COR)	Test Method Available	0.75 - 0.90	ISO 10545-5
xi) Bulk Density (gm/cc)	N.A.	2.3	IS 13630 Part 2
xii) Coefficient of Friction	Where required manufacturer to declare value	Depends upon Glazed surface	ISO 10545-17
xiii) Frost Resistant	Required	100 Cycle Passed	IS 13630 Part 10 / ISO-10545-12
C) Chemical Resistant (Glazed Tiles)			
I) Stain Resistant	Min. Class 3	Min. Class 2 (For Polished) Min Class 1 (For Matt)	IS 13630 Part 8 / ISO 10545-14
ii) Resistant to Household Chemicals	Min. Class B	Min Class AA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Declared Value[1]	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com