DURAGRES
Timeless Elegance

SOMANY



UNIT - 3 | FOR ALL INDIA

Plank Collection

200x1200 mm
GLAZED VITRIFIED TILES

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump,
B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

Visit us at: www.somanyceramics.com
Find us at: www.facebook.com/SomanyCeramic
Find us at: www.twitter.com/SomanyCeramic
Find us at: www.instagram.com/SomanyCeramics

Available on the App Store
GET IT ON Google play

DURAGRES / CAT / JULY 2024

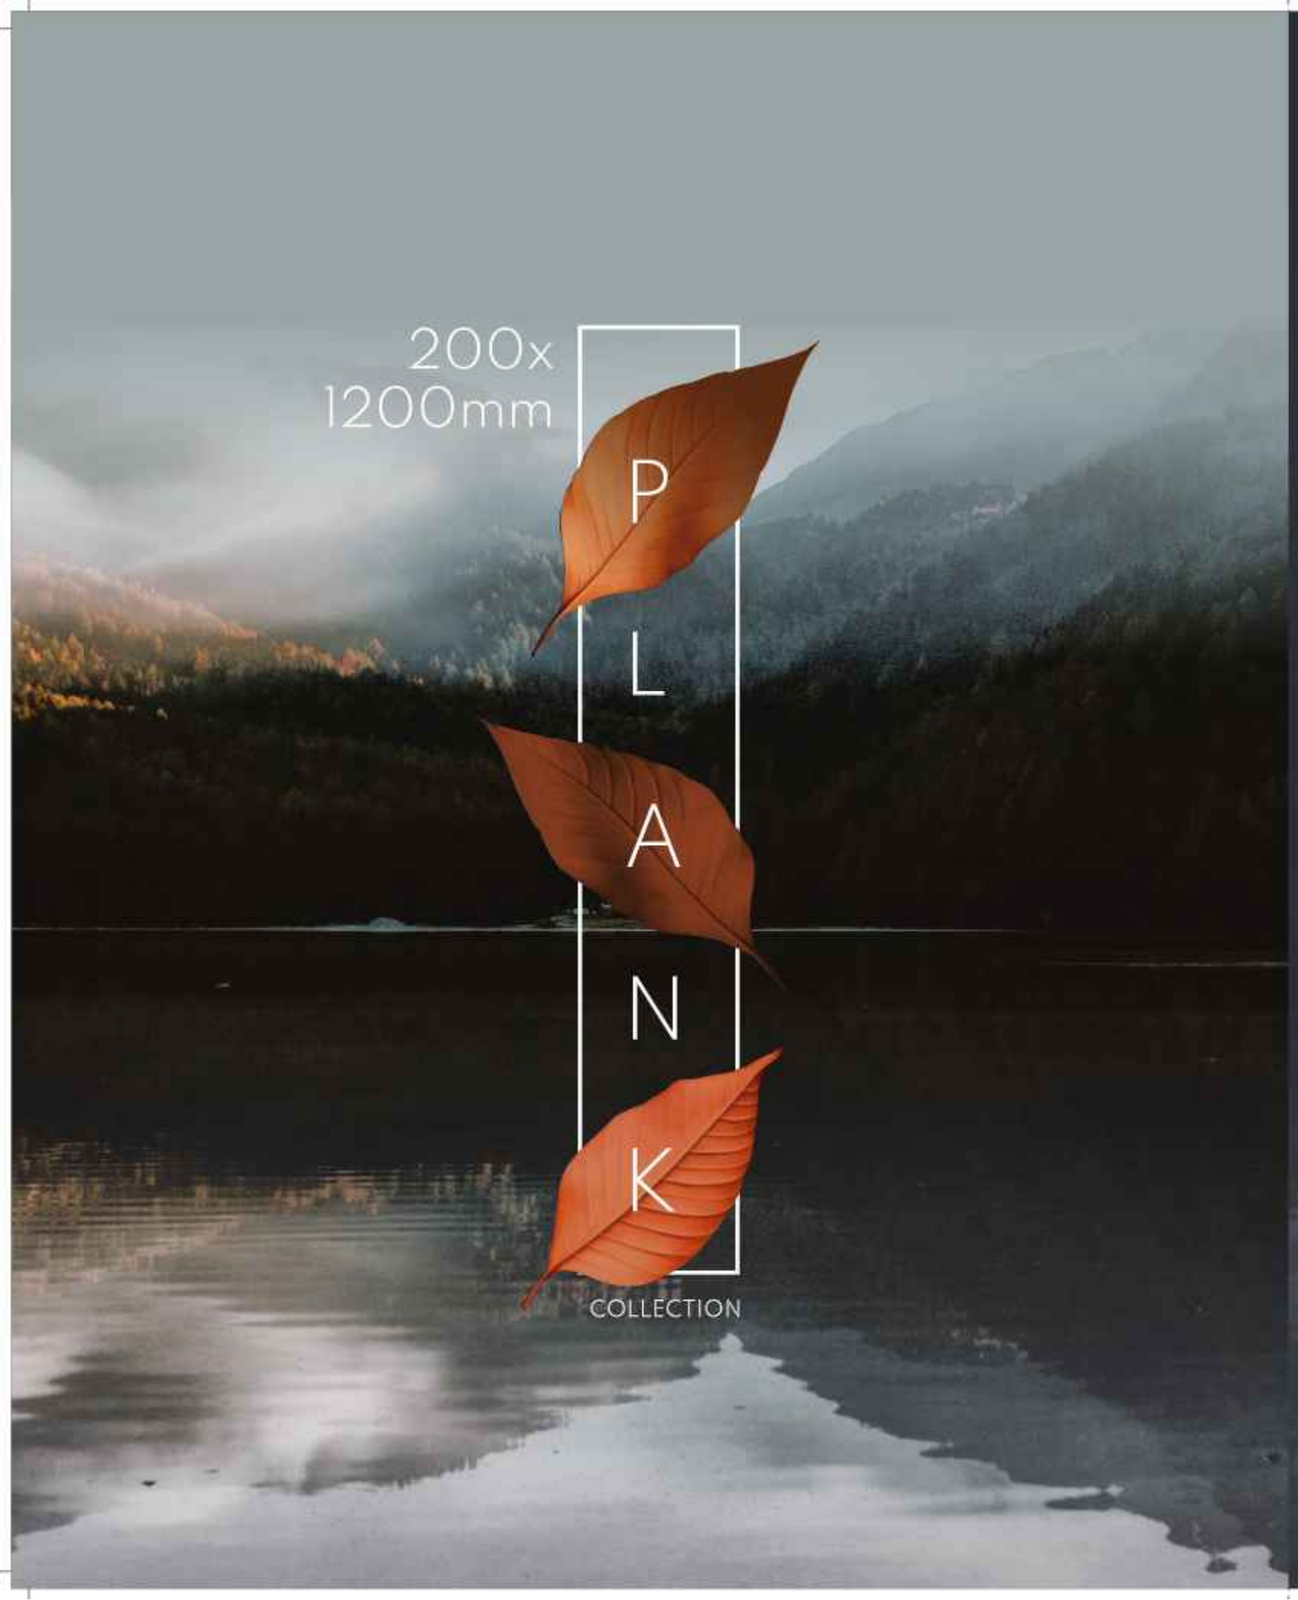

SOMANY
DURAGRES

PLANK

Be inspired by Nature

Natural-looking tiles are one of the key trends for indoor and outdoor floor and wood is one of the most popular choice thanks to its versatility and beauty. Combining the aesthetic quality of natural timber with the durability of vitrified tiles, wood effect tiles are the perfect option when replacing a floor in a renovation project or laying a new floor in a newly built property, as it helps in creating your own personal style.

Parquet floor tiles can give any room the elegant look of hardwood, in an eco-friendly new way. It's waterproof, highly resistant to scratches and chemicals, easy to clean and resistant to heat and frost. It definitely looks like a good idea.



SOMANY
DURAGRES



200x
1200mm
GLAZED VITRIFIED TILES

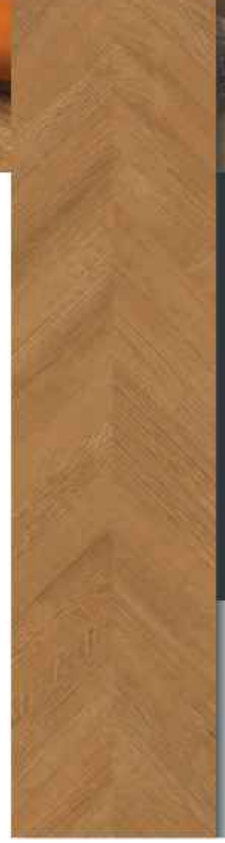



Royally rich and Beautiful.

Embellish your dream space with designs that reflect your style with panache. Choose Duragres to make a style statement in a subtle manner and let the world know your refined choice. The collection comprising the most stylish patterns in varied sizes allows your creativity to delve deep into the realms of innovation.

APPLICATION AREAS

- RESIDENCE
- OFFICES
- HOTELS
- PUBLIC PLACES
- AIRPORTS
- MALLS



P L A N K

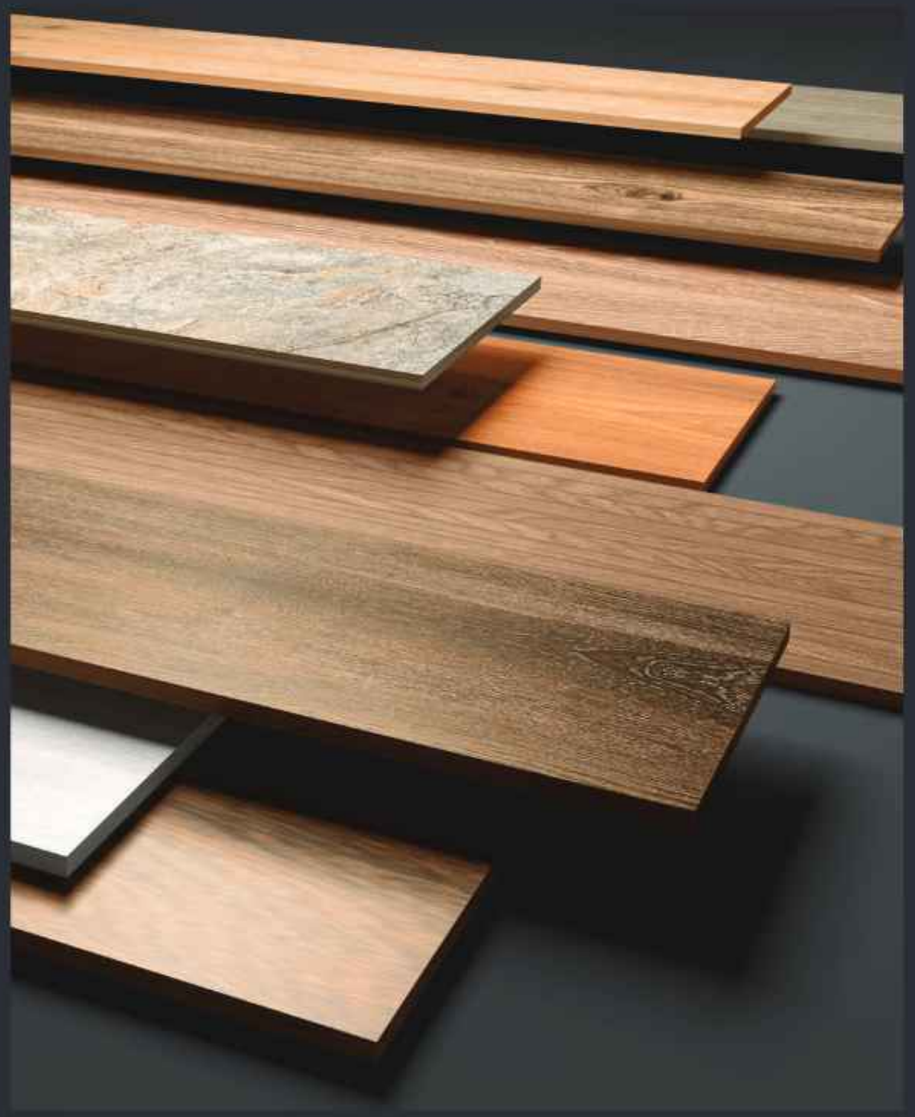

200 x 1200 mm

SOMANY DURAGRES

INDEX

STRIO VALOR IMP BRICOLA MOCHA	08	STRIO VALOR CLUMP WOOD WENGE	24
STRIO VALOR IMP BRICOLA OAK	08	STRIO VALOR FORET WOOD BIANCO	24
STRIO VALOR IMP BELLVER NATURAL	09	STRIO VALOR GARDA WOOD ROSSO	25
STRIO VALOR IMP LENO MAPLE	09	STRIO VALOR JAZZ WOOD TEAK	25
STRIO VALOR IMP LENO PINE	12	STRIO VALOR MODERNA WOOD WENGE	28
STRIO VALOR IMP LENO WALNUT	12	STRIO VALOR ONTANO WOOD WALNUT	28
STRIO VALOR IMP TYLER WENGE	13	STRIO VALOR PEROBA WOOD GREY	29
STRIO VALOR OLSON MUSHROOM	16	STRIO VALOR PEROBA WOOD WENGE	29
STRIO VALOR OLSON MAPEL	16	STRIO VALOR POLE WOOD BROWN	32
STRIO VALOR OLSON WENGE	17	STRIO VALOR SLATE STONE NATURAL	32
STRIO VALOR ALPINE WOOD TEAK	20	STRIO VALOR SONORA WOOD GREY	33
STRIO VALOR BRICH WOOD WENGE	20	STRIO VALOR SPAR WOOD WALNUT	33
STRIO VALOR CASK WOOD TEAK	21	STRIO VALOR TIMBER WOOD MAHOGANY	36
STRIO VALOR CLEAT WOOD WENGE	21	STRIO VALOR VINTAGE WOOD OXIDO	36

NEW

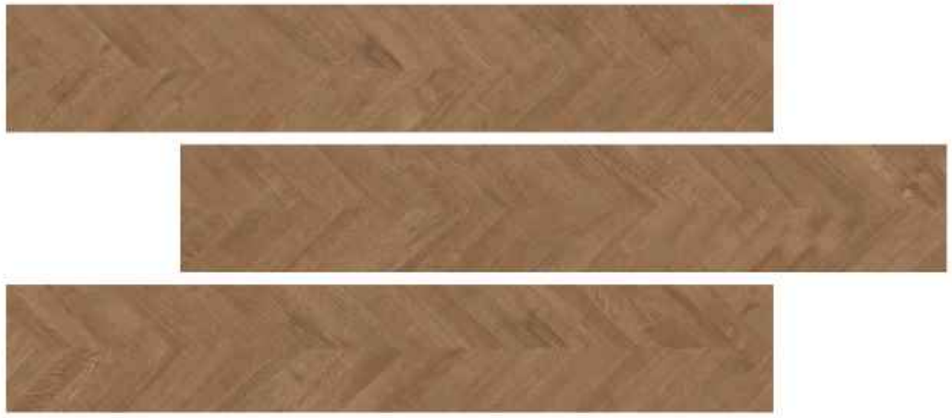

STRIO VALOR IMP BRICOLA MOCHA V4+

NEW

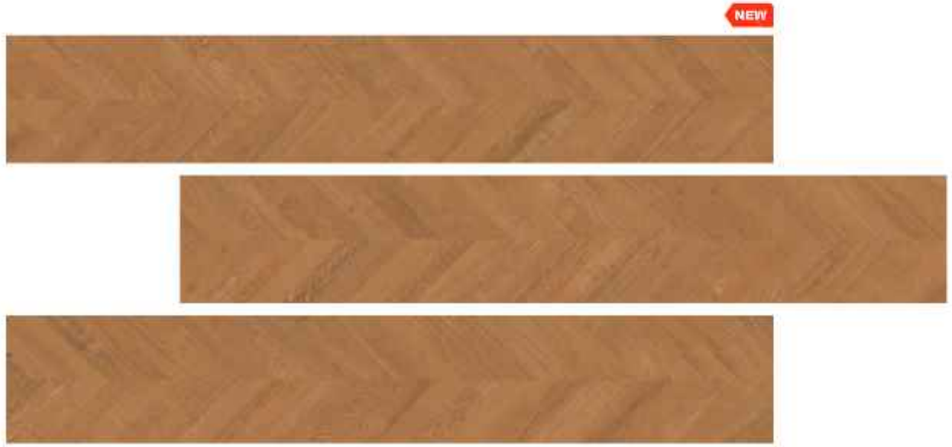

STRIO VALOR IMP BRICOLA OAK V4+

NEW



WOOD PUNCH

STRIO VALOR IMP BELLVER NATURAL V4+

NEW



WOOD PUNCH

STRIO VALOR IMP LENO MAPLE V4+



STRIO VALOR IMP LENO MAPLE | STRIO VALOR FORET WOOD BIANCO | 200x1200MM | CARVING & MATT

GLAZED VITRIFIED TILES

200x1200mm | CARVING

NEW



WOOD PUNCH

STRIO VALOR IMP LENO PINE V4+

NEW



STRIO VALOR IMP LENO WALNUT V4+

NEW



STRIO VALOR IMP TYLER WENGE V4+



STRIO VALOR IMP TYLER WENGE | 200x1200MM | CARVING

GLAZED VITRIFIED TILES

200x1200mm | SPL MATT

NEW

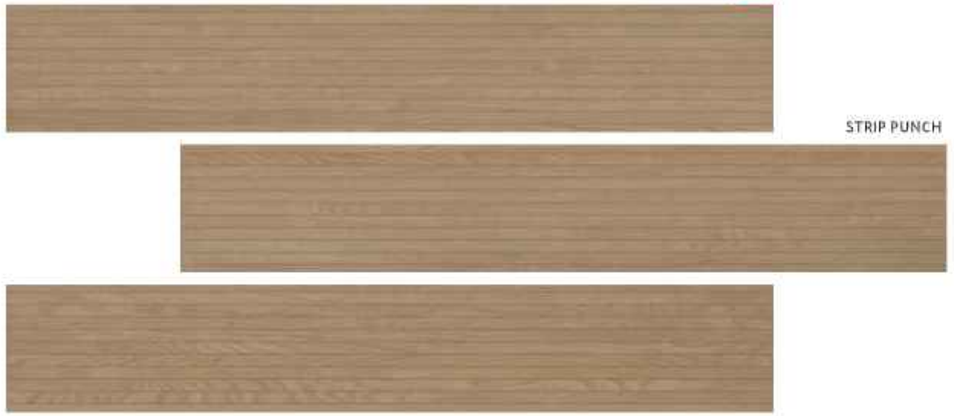

STRIP PUNCH

STRIO VALOR OLSON MUSHROOM V4+

NEW



STRIP PUNCH

STRIO VALOR OLSON MAPEL V4+

NEW

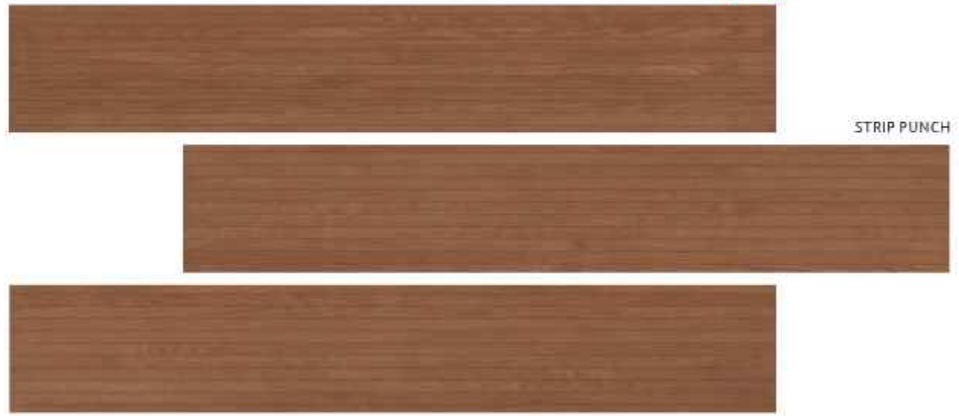

STRIP PUNCH

STRIO VALOR OLSON WENGE V4+

STRIO VALOR OLSON MUSHROOM | STRIO VALOR OLSON MAPEL | 200x1200MM | SPL MATT



STRIO VALOR ALPINE WOOD TEAK V4+



STRIO VALOR BRICH WOOD WENGE V4+



STRIO VALOR CASK WOOD TEAK V4+



STRIO VALOR CLEAT WOOD WENGE V4+



STRIO VALOR CASK WOOD TEAK | 200x1200MM | MATT

GLAZED VITRIFIED TILES

200x1200mm | MATT



STRIO VALOR CLUMP WOOD WENGE V4+

STRIO VALOR FORET WOOD BIANCO V4+

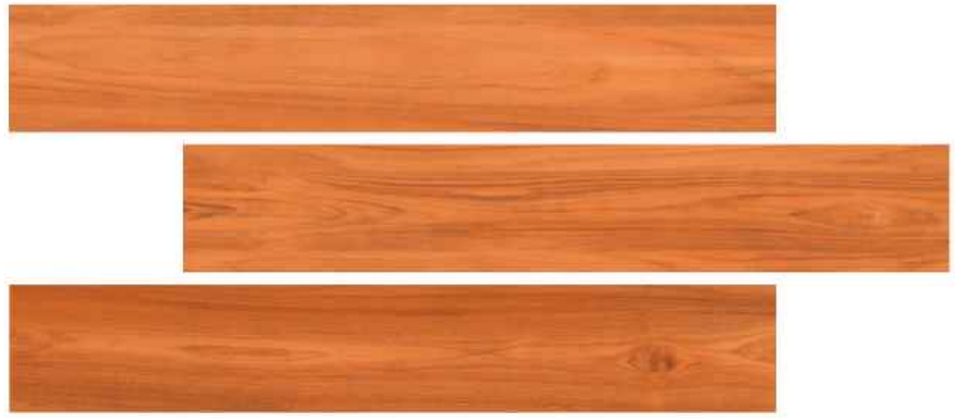

STRIO VALOR GARDA WOOD ROSSO V4+



STRIO VALOR JAZZ WOOD TEAK V4+

STRIO VALOR ONTANO WOOD WALNUT | 200x1200MM | MATT





STRIO VALOR MODERNA WOOD WENGE V4+



STRIO VALOR ONTANO WOOD WALNUT V4+



STRIO VALOR PEROBA WOOD GREY V4+



STRIO VALOR PEROBA WOOD WENGE V4+



STRIO VALOR SLATE STONE NATURAL | STRIO VALOR SPAR WOOD WALNUT | 200x1200MM | MATT



STRIO VALOR POLE WOOD BROWN V4+



STRIO VALOR SLATE STONE NATURAL V4+



STRIO VALOR SONORA WOOD GREY V4+



STRIO VALOR SPAR WOOD WALNUT V4+



STRIO VALOR SPAR WOOD WALNUT | 200x1200MM | MATT

GLAZED VITRIFIED TILES

200x1200mm | MATT



STRIO VALOR TIMBER WOOD MAHOGANY V4+



STRIO VALOR VINTAGE WOOD OXIDO V4+



STRIO VALOR VINTAGE WOOD OXIDO | 200x1200MM | MATT

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically to natural material (Stone, Wood, Fabric), and it has become increasingly in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & pattern guide below classifies a scale of ranges according to the degree of variation.

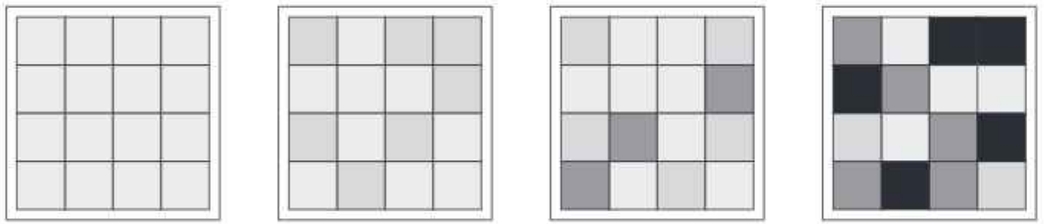

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation

HD HIGH DEFINITION High Definition Image

While laying the tiles please follow the arrow on the back of the tiles. For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talc powder

PACKING DETAILS FOR GVT TILES				
Nominal Size(mm)	Thickness(mm)	Avg. weight per carton(Kgs)	No. of tiles per carton	Coverage area per carton
200x1200mm	9.5	20.5	4	0.96sq.mtr / 10.33sq.ft

TECHNICAL SPECIFICATION FOR GVT TILES				
Characteristics	Requirement as per IS 13622 : 2017 0.08 < E ≤ 3% Group B I b	Requirement as per ISO 13006 : 2018 ≤ 0.5% Group B I a	Our values	Test Method
Dimension & Surface Quality				
Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
Thickness	± 5.0%	± 5.0%	± 5.0%	
Straightness of side	± 0.1%	± 0.3%	± 0.1%	
Rectangularity	± 0.1%	± 0.3%	± 0.1%	
Surface Flatness				
Center Curvature (Max.Deviation)	± 5.0%	± 0.4%	± 0.2%	
Edge Curvature (Max.Deviation)	± 5.0%	± 0.4%	± 0.2%	
Corner Warpage (Max.Deviation)	± 5.0%	± 0.4%	± 0.2%	
Surface Quality	Min 95% of tiles will be free from visible defects	Min 95% of tiles will be free from visible defects	Min 95% of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Av. 0.08 < E ≤ 3%, Individual 3.3 Max	Av. 0.5%, Individual 0.6% Max	Av. 0.5%, Individual 0.6% Max	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avg. 30, Individual 27 Min	Avg. 35, Individual 32 Min	Avg. > 35	IS 13630 Part 5/ISO 10545-4
Breaking Strength in N	1100 N	1300 N	Min. 1300	
Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
Scratch Hardness of surface (Mohs)	Min. 5	N.A	Min. 5	IS 13630 Part 13
Resistance to Abrasion of glazed tiles(Class I to V)	Min. II	Abrasion Class & Cycle passed	Class-V	IS 13630 Part 7/ ISO 10545-7
Coefficient of linear thermal expansion from ambient temperature to 100° c	7 X 10⁻⁶ K⁻¹ Max	Test Method Available	Max 6 X 10⁻⁶ K⁻¹ max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistance	10 cycle test	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistance	4 cycle @ 7 Star test	Required	4 cycle passed	IS 13630 Part 8/ISO 10545-11
Impact Resistance as Co-efficient of Re stitution	0.55 min	Required	Min 0.55	IS 13630 Part 14/ ISO 10545-5
Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Chemical Resistance (glazed Tiles)				
Stain Resistance	Min. Class 1	Min. Class 3	Min. Class - 1	IS 13630 Part 6/ ISO 10545-14
Resistance to household chemicals	Min. Class AA	Min. Class GB	Min. Class AA	IS 13630 Part 6/ ISO 10545-13
Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value[1]	Min. Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY
Bathware

Our PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Ezy Fix

TILES ADHESIVES & GROUTS

SOMANY

INDIA' FASTEST GROWING ADHESIVE BRAND



HIGH STRENGTH POLYMER MODIFIED

TILE ADHESIVE



BENEFITS

- READY AND EASY TO USE
- EXCELLENT BONDING WITH ALL SURFACES
- FAST SETTING
- SELF-CURING

USAGE

- FOR FIXING ALL TYPE OF TILES
- FOR NEW FLOORING AND RENOVATION
- CAN BE USED FOR TILE ON TILE