SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)




UNIT 04 RANGE VOL 1 | MARCH 2026

DURASTONE

HEAVY DUTY VITRIFIED TILES

400 x 400mm

SOMANY

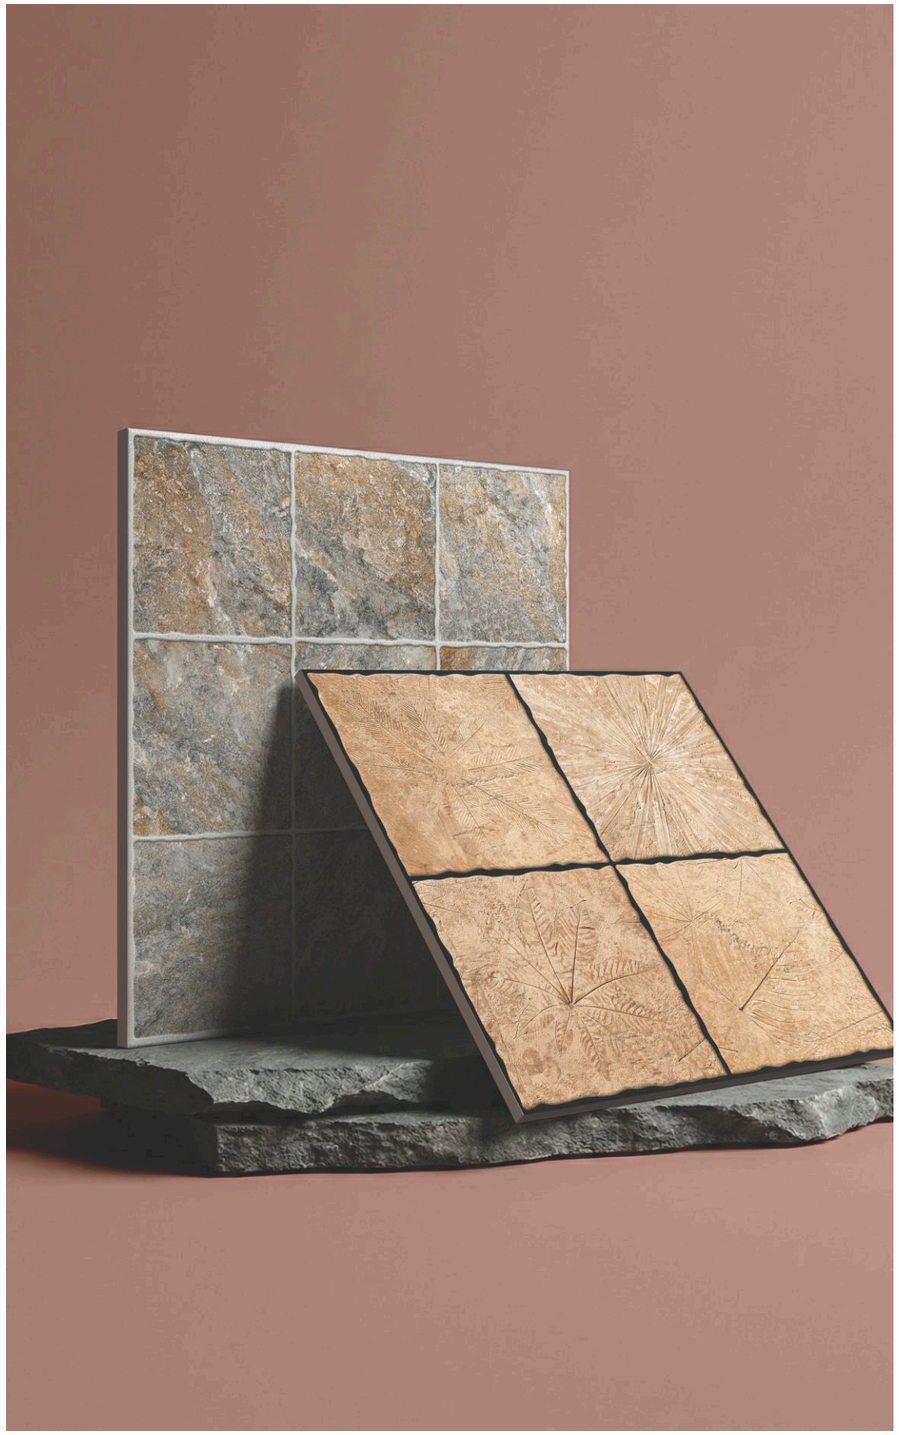

DURASTONE

Primal Permanence, Forged by Stone

The earth took millennia to perfect it, because endurance is not engineered, it is elemental. Drawn from the character of authentic stone, the Durastone heavy duty vitrified tile collection carries its raw essence into every surface, unyielding by nature.

Offered in a 400x400mm format, the collection presents a Matt finish that imparts understated depth and tactile warmth, spanning an expansive repertoire from subtly mineral-textured analogues and layered tonal expressions to striking geometric configurations and intricate decorative patterns.


Crafted for the rigours of outdoor living, these tiles deliver exceptional durability against harsh weather, moisture, abrasion, and intensive foot traffic. Their remarkable chromatic stability remains vibrant and unfaded under prolonged UV exposure, purpose-built for driveways, car parks, garages, residential parking zones, fuel station forecourts, pathways, courtyards, patios, and commercial precincts where longevity and aesthetic distinction are non-negotiable.

APPLICATION AREAS

1. Driveways & Pathways
2. Pool Deck Areas
3. High-Traffic Industrial Zones
4. Public Parks & Gardens
5. Terraces & Balconies
6. Parking Areas
7. Healthcare & Pharmaceutical Facilities
8. Automobile Zones

TECHNICAL FEATURES

- Anti Skid
- Blended Smoothness
- Non-Reflective
- Abrasion And Wear-resistant
- Eco Friendly
- High Flexural Strength
- Frost Resistant
- Chemical Resistant
- Easy To Clean
- Temperature Resistant

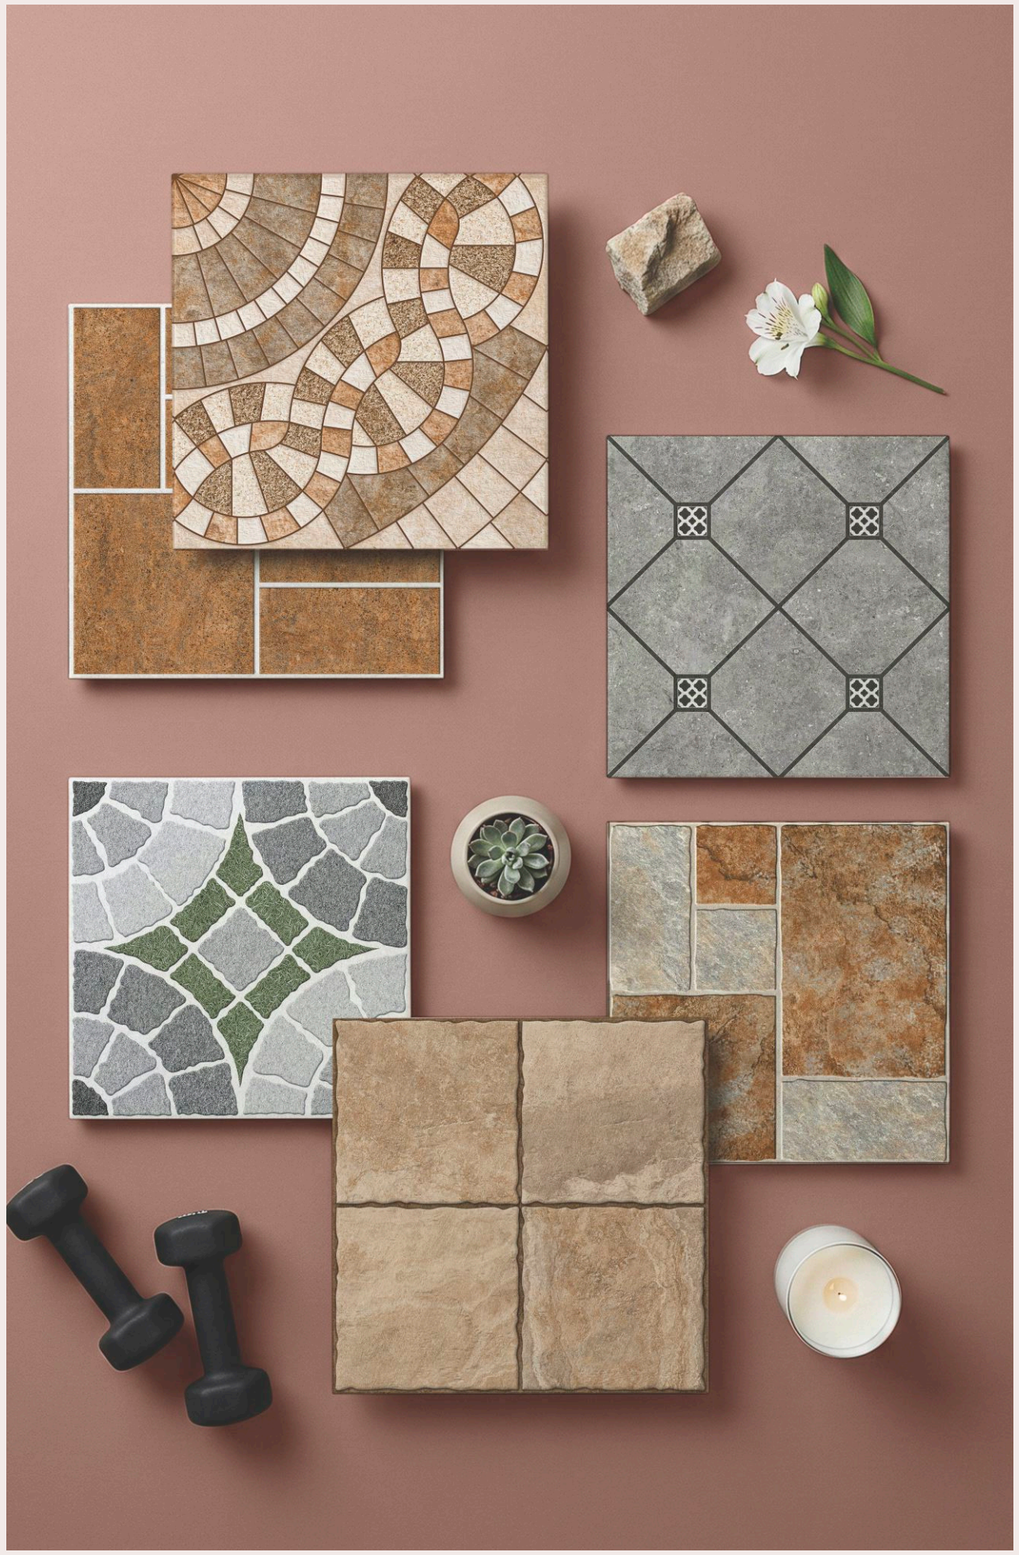

FLOOR: **ASHER GREY**
SIZE: 400x400mm

HEAVY DUTY VITRIFIED TILES
SURFACE: MATT








AGAM GREY



AISHA BROWN




ALVA GREY

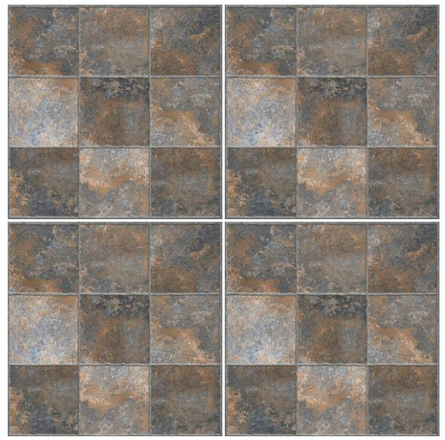


ALVA ZINC




ALESSO GREEN

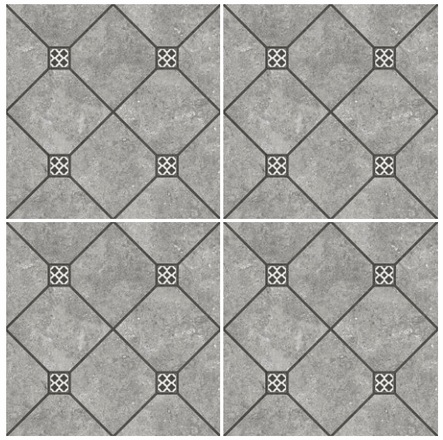

ASHER GREY

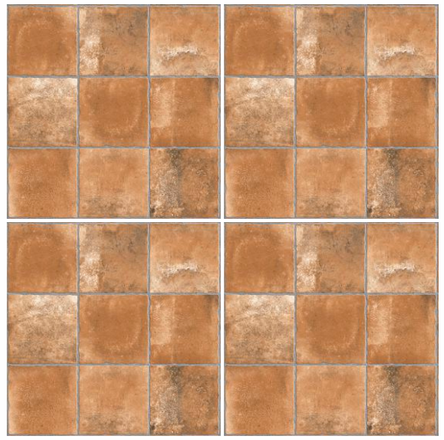

BOAZ BROWN

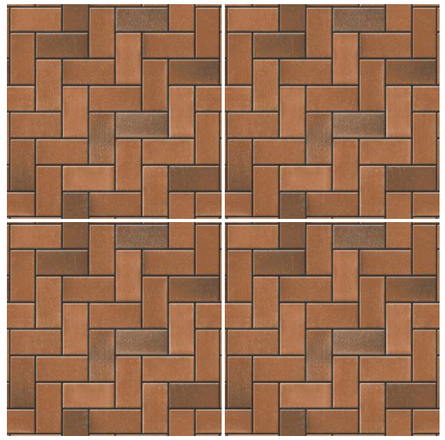


CYLUS COTTO


400x400mm

A minimum 5mm spacer is recommended


Anti Skid

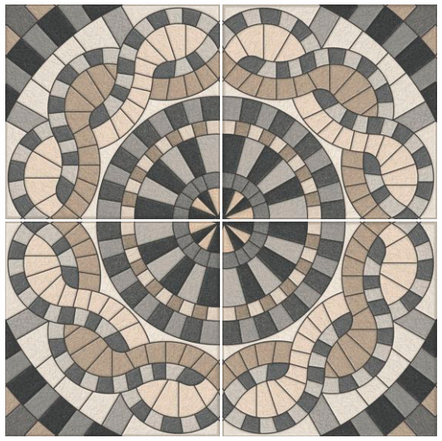


CORIE GREY

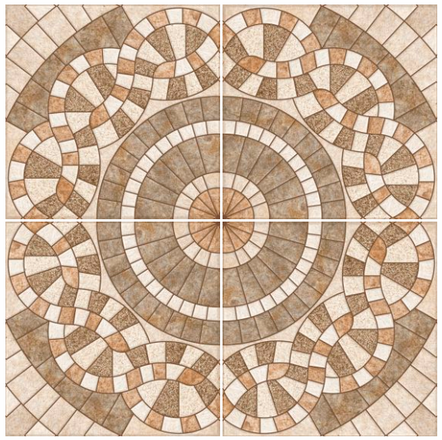

CORIE BEIGE

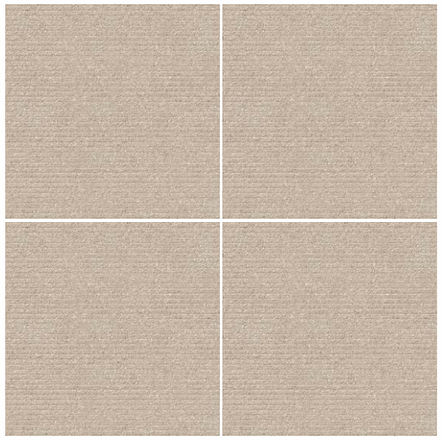

EBRAR BEIGE

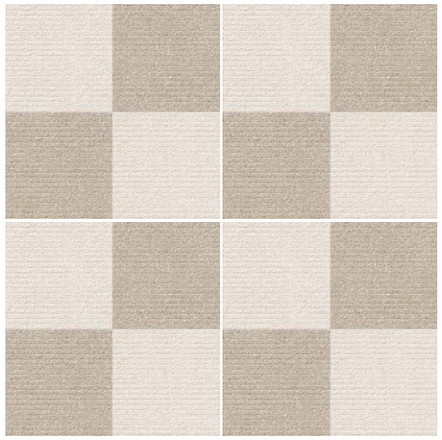

EBRAR BEIGE DECOR

400x400mm

A minimum 5mm spacer is recommended


Anti Skid




DARIS MUSHROOM



DARIS RUST

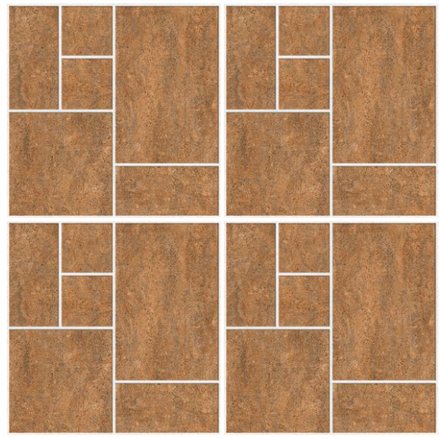


DARIS BROWN

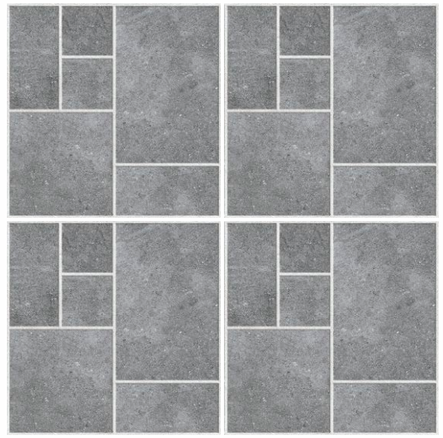


DARIS GREY

FLOOR: **HARON BIANCO & HARON NERO**
SIZE: 400x400mm

HEAVY DUTY VITRIFIED TILES
SURFACE: MATT

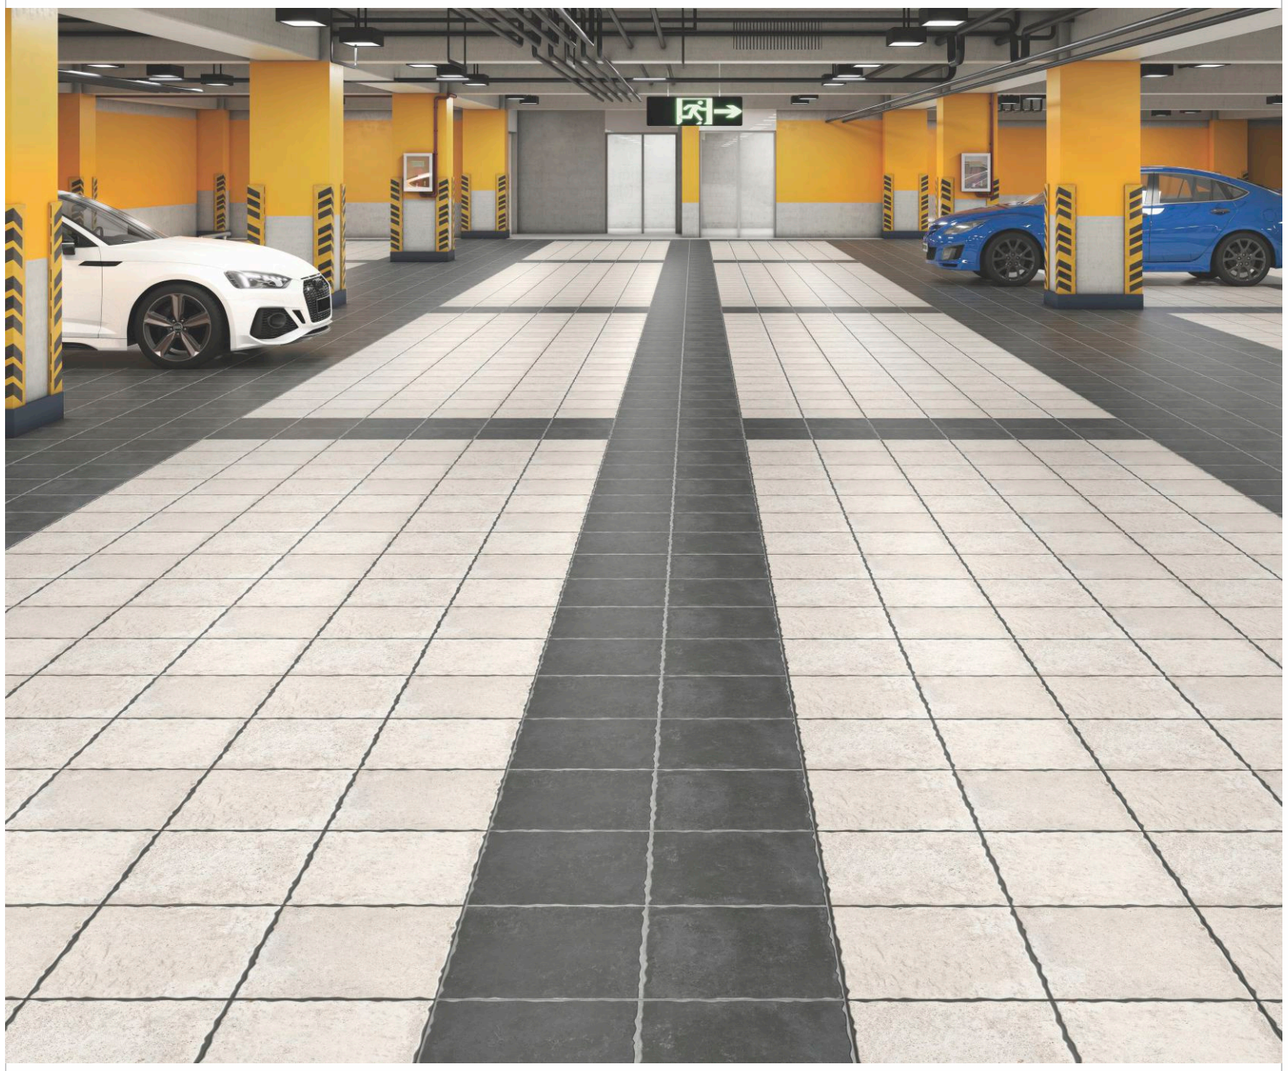

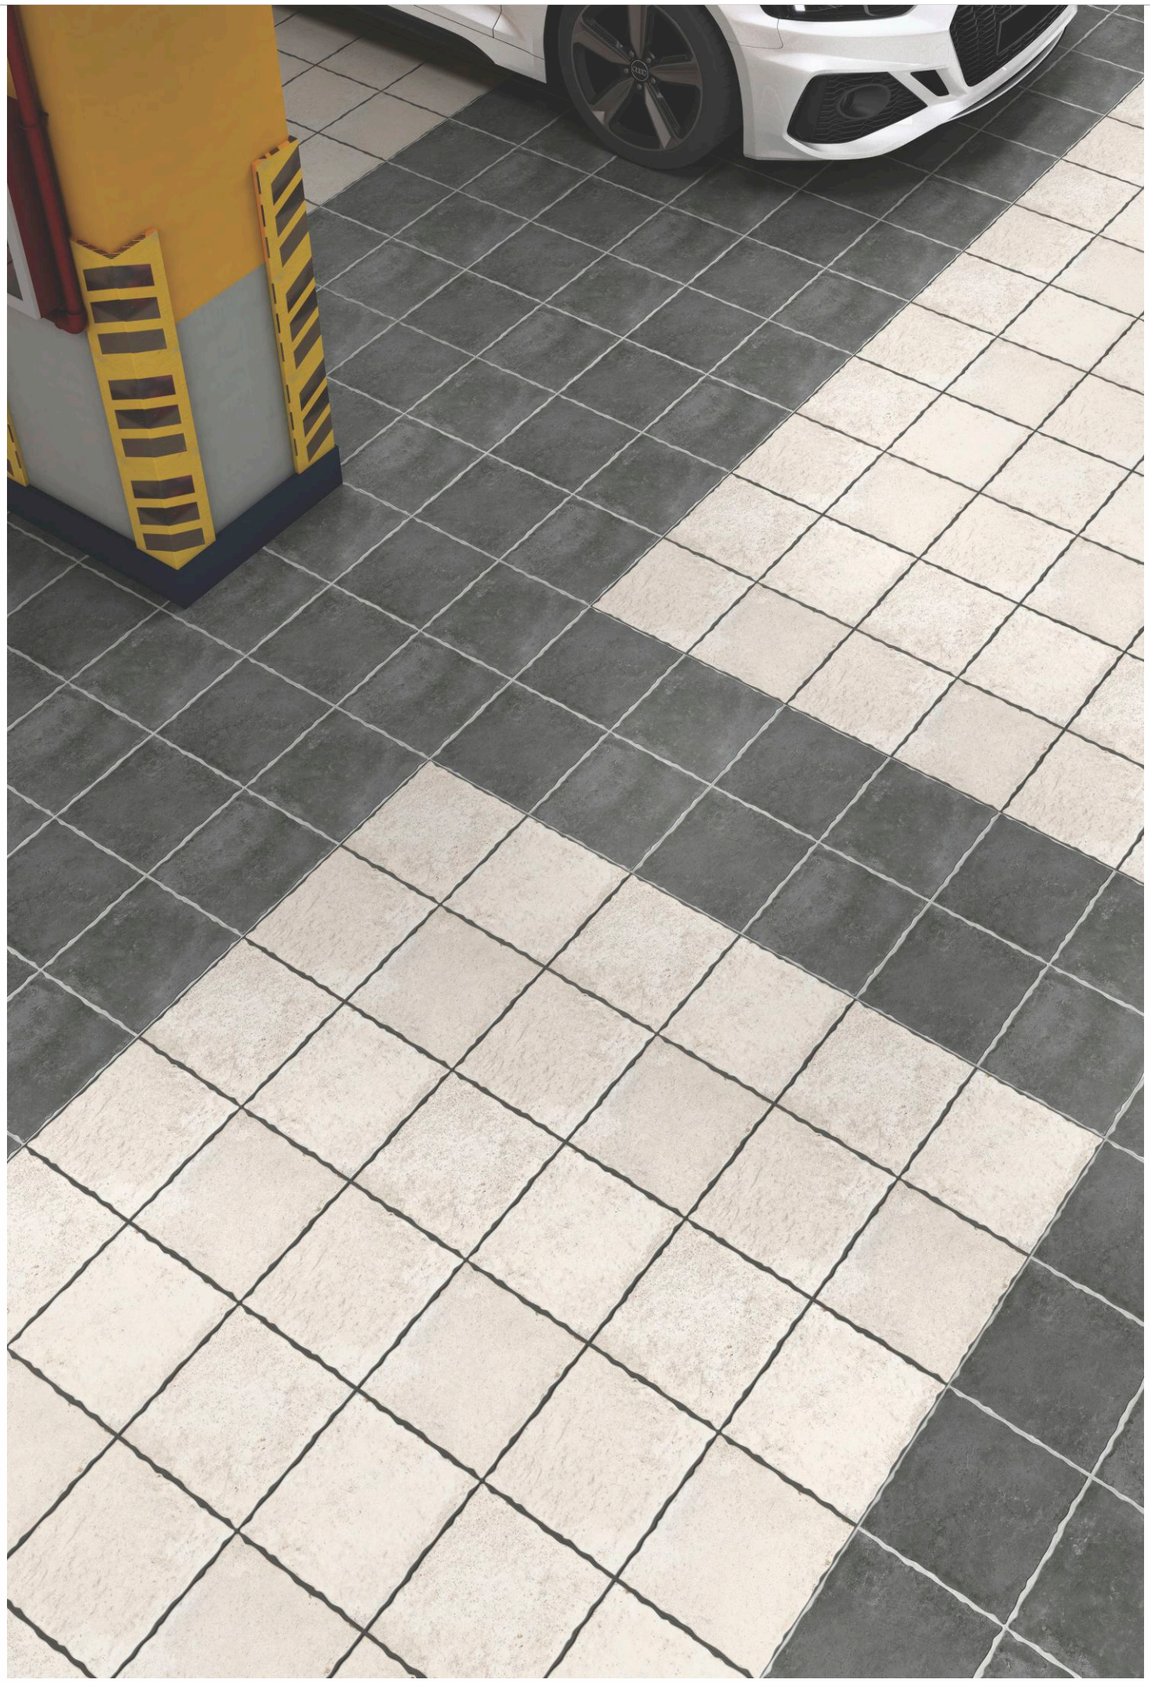




ELIA BROWN




ELIA BLUE

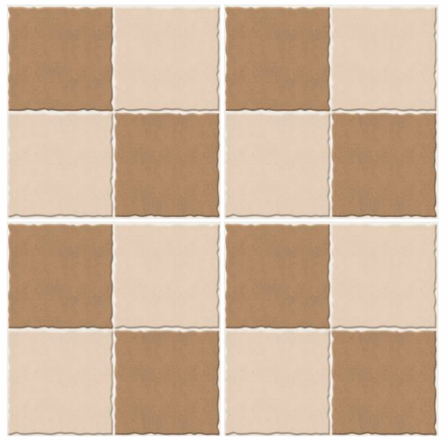

GIVON BROWN



GIVON GREY

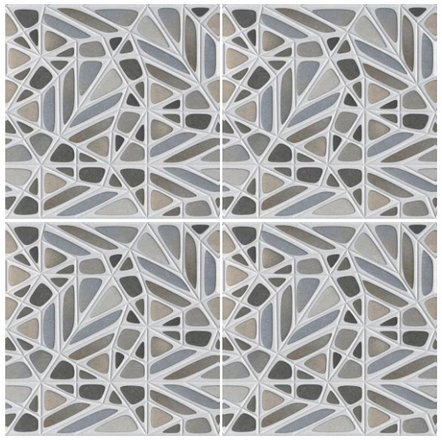


EDDIE GREY



ELLIOT NATURAL



HANZO BROWN

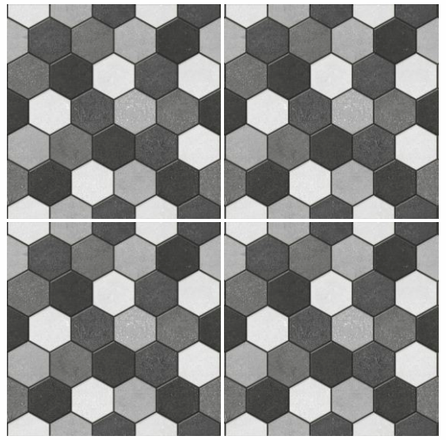


HEXA GREY


400x400mm

A minimum 5mm spacer is recommended

Anti Skid

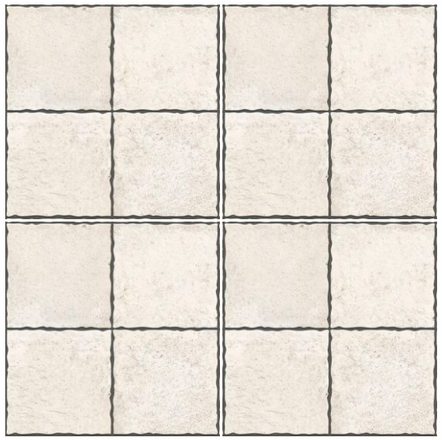


HARON BIANCO

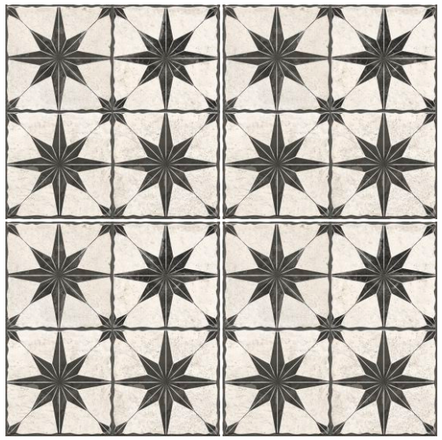


HARON DECOR



IVAN DECOR

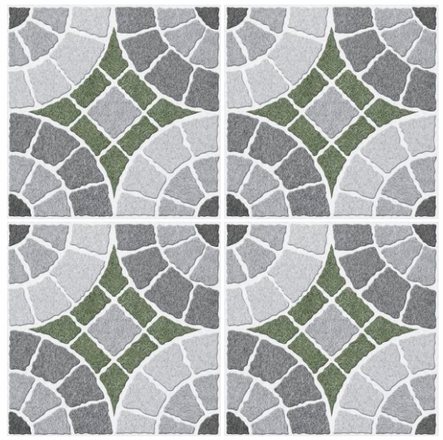


LIMES GREEN

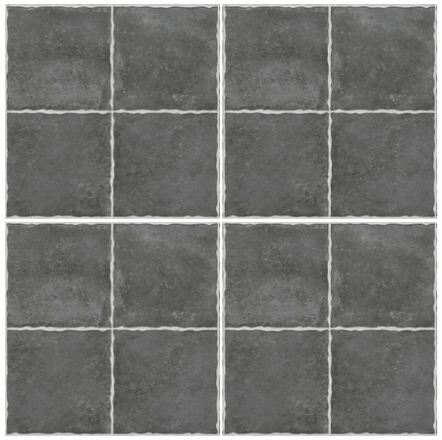


HARON NERO



IVAN BROWN

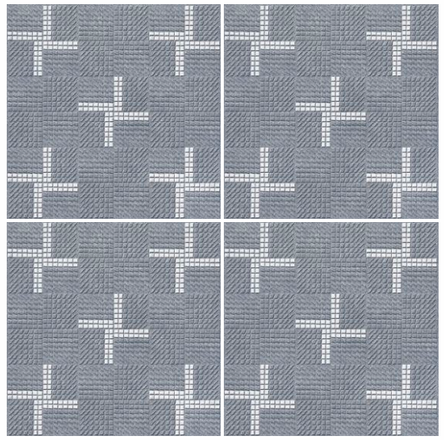

MAGNET GREY

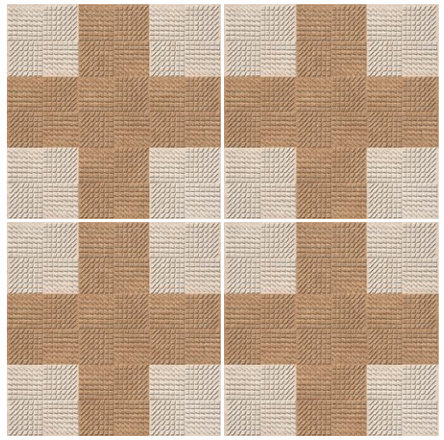

MAGNET BROWN

400x400mm

A minimum 5mm spacer is recommended


Anti Skid

FLOOR: **MILES BROWN**
SIZE: 400x400mm

HEAVY DUTY VITRIFIED TILES
SURFACE: MATT






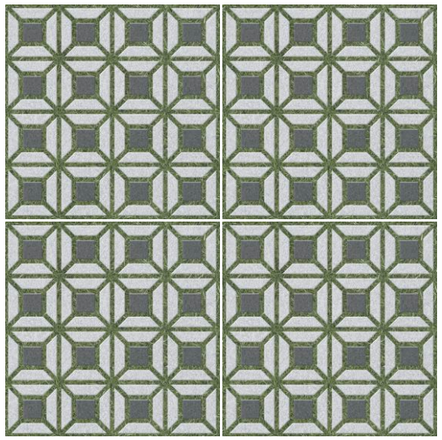

MAKU GREEN



MILES BROWN

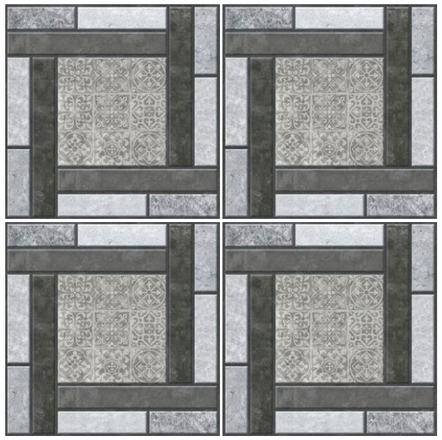


RODIN GREY


400x400mm

A minimum 5mm spacer is recommended

Anti Skid

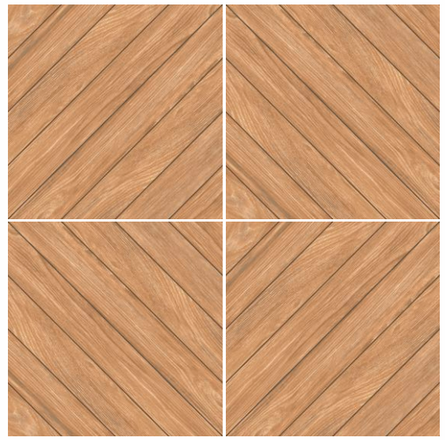

NUCIS BROWN

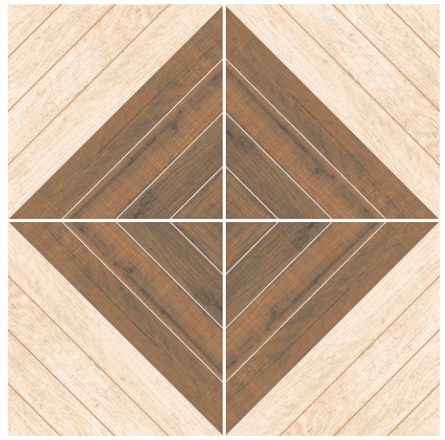


NUCIS PINE

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

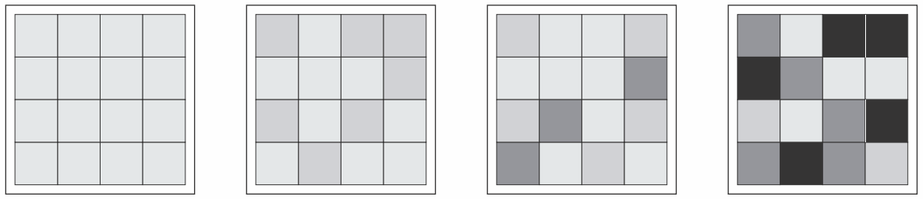

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR DURASTONE COLLECTION				
Nominal Size (mm)	**Thickness (mm)**	**Avg. Wt. Per Carton (Kg.)**	**No. of Tiles Per Carton**	**Coverage Area Per Carton**
400X400mm	11.5mm	19.5kg	5	0.80 sq meter / 8.61sq feet

TECHNICAL SPECIFICATION FOR DURASTONE COLLECTION				
Characteristics	**Requirement as per ISO 13006:2018 0.5%≤ 3.0% Group BIb**	**Requirement as per IS 15622:2017 0.08 < E ≤ 3.0 Group BIb**	**Our Value**	**Test Method**
Dimension & Surface Quality				
Length & Width	± 0.3%	± 0.1%	± 0.10%	IS 13630 Part 1/ISO 10545-Part 2
Thickness	± 5.0%	± 5.0%	± 4.0%	
Straightness of Side	± 0.30%	± 0.1%	± 0.10%	
Rectangularity	± 0.30%	± 0.1%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.40%	± 0.5%	± 0.2%	
Edge Curvature (%) (Max. Deviation)	± 0.40%	± 0.5%	± 0.2%	
Corner Warpage (%) (Max. Deviation)	± 0.40%	± 0.5%	± 0.2%	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	0.5 % < Ev ≤ 3.0 % Ind.3.3% Max	Avg. 0.08< E ≤ 3.0	Avg. < 3.0 %	IS 13630 Part 2/ ISO 10545-Part 3
Modulus of Rupture [N/mm^2]	Avg. 30, Individual 27Min	Avg. 30, Individual 27Min	Avg.> 30	IS 13630 Part 6/ISO 10545-Part 4
Breaking Strength in N	1100 N	1100 N	Min 1100 N	
Moisture Expansion in mm/m	Test Method Available	0.02 Max	Max 0.02	IS 13630 Part 3/ISO-10545-Part 10
Scratch Hardness of Surface (Mohs)	N/A	Min 5	Min 6	IS 13630 Part-13
Resistant to Surface Abrasion of Glazed Tiles	Min Class II	Min II	Gr IV	IS 13630 Part 11/ISO 10545 -Part 7
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100^o C	Test Method Available	Max 7 X 10 -^{6} K-^{1} max	Max 6 X 10 -^{6} K-^{1} max	IS 13630 Part 4/ISO 10545-Part 8
Thermal Shock Resistant	Required	Min 10 Cycle Passed	10 Cycle Passed	IS 13630 Part 5/ISO-10545-Part 9
Crazing Resistant	N/A	4 Cycle @ 7.5 Bar Min	4 Cycle Passed	IS 13630 Part 9/ISO 10545-Part 11
Impact Resistant as Coefficient of Restitution (COR)	Test Method Available	0.55 Min	Min 0.55	IS 13630 Part 5/ISO 10545-Part 14
Frost Resistant	Required	Required if Agreed	100 Cycle Passed	IS 13630 Part 10/ISO 10545-Part 12
Chemical Resistant (Glazed Tiles)				
Stain Resistant	Min Class 3	Min Class 1	Min Class 2	IS 13630 Part 8/ISO 10545-Part 14
Resistant to Household Chemicals	Minimum B	Required if Agreed	Min Class AA	IS 13630 Part 8/ ISO 10545-Part 14
Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Declared Value^f	Required if Agreed	Min Class A	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com