SOMANY

**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**





UNIT 03 RANGE VOL 1 | JAN 2026

# DURASTONE

**PAVESMART**
collection

500 x 500mm | 400 x 400mm | 300 x 300mm

SOMANY



# DURASTONE

## Aesthetic Excellence Carved in Stone

Inspired by nature's elemental forces, Durastone Pavesmart captures the eternal soul of stone into surfaces that define outdoor living with enduring elegance. The collection honours authentic stone character through intricate textures, tonal variations, and refined patterns, a testament to craftsmanship that channels raw, primal essence into versatile outdoor solutions. Available in 500x500mm, 400x400mm, and 300x300mm formats, Pavesmart offers designers limitless creative freedom with surfaces engineered to withstand the test of time. The matt finish, punctuated with subtle textural accents, delivers understated sophistication while ensuring slip resistance and practicality. Crafted for the rigours of outdoor living, these tiles deliver exceptional durability against harsh weather, moisture, abrasion, and intensive foot traffic. Their remarkable chromatic stability remains vibrant and unfaded under prolonged UV exposure — ideal for driveways, parking areas, pathways, courtyards, patios, and commercial outdoor zones where longevity and aesthetic integrity are paramount.



## Multiple Formats. Unified Design. Endless Possibilities.

Designed for structured paving patterns and versatile outdoor layouts, Pavesmart offers precision, flexibility, and creative freedom across every space.

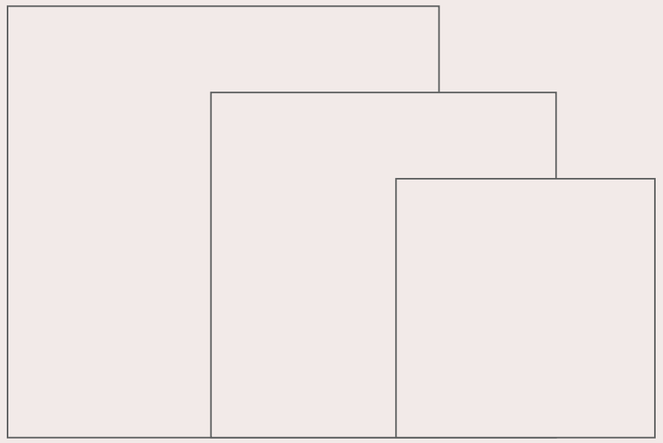

Sizes: 500x500mm | 400x400mm | 300x300mm

## Versatile Thickness Solutions for Diverse Needs

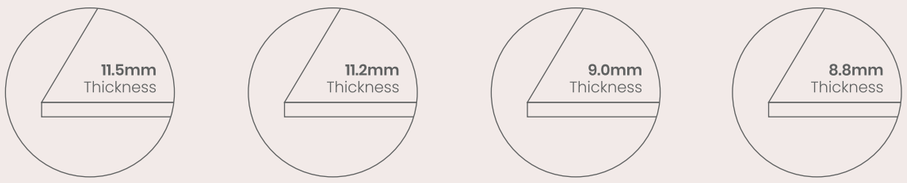

## APPLICATION AREAS

1. Driveways & Pathways
2. Pool Deck Areas
3. High-Traffic Industrial Zones
4. Public Parks & Gardens
5. Terraces & Balconies
6. Parking Areas
7. Healthcare & Pharmaceutical Facilities
8. Automobile Zones

## TECHNICAL FEATURES

- Anti Skid
- Blended Smoothness
- Non-Reflective
- Abrasion And Wear-resistant
- Eco Friendly
- High Flexural Strength
- Frost Resistant
- Chemical Resistant
- Easy To Clean
- Temperature Resistant





# DURASTONE

## 500x500mm

HEAVY DUTY VITRIFIED TILES

Experience exceptional strength with Durastone Pavesmart's 500x500mm vitrified tiles. Crafted for demanding outdoor conditions and vehicular load, these tiles combine robust performance with refined aesthetics. They allow seamless installation over prepared surfaces and are ideal for driveways, parking areas, automobile zones, courtyards, pathways, pharmaceutical facilities, and commercial outdoor zones requiring weather-resistant surfaces.



FLOOR: **MOTIVO COTTO**
SIZE: 500x500mm

**HEAVY DUTY** VITRIFIED TILES
SURFACE: MATT





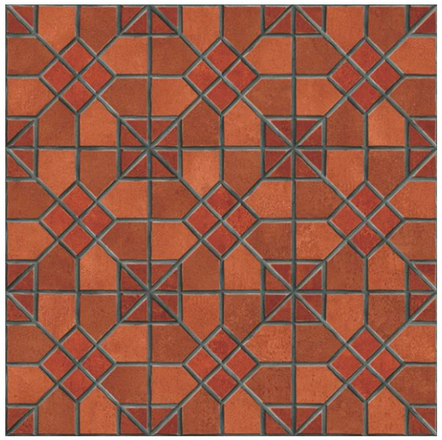

AMOS BROWN
Punch - V1

SPECIAL RED SERIES

360°

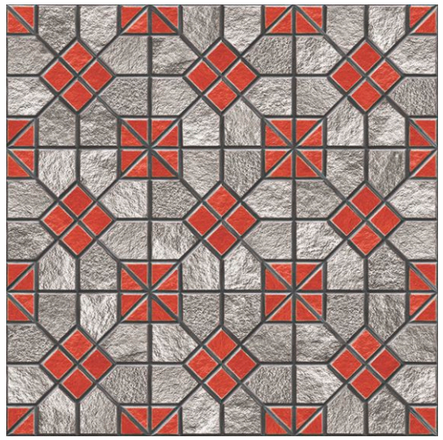

AMOS NATURAL
Punch - V1

360°



AMOS GREY
Punch - V1

360°



AMOS MULTI
Punch - V1

360°

500x500mm
11.2mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



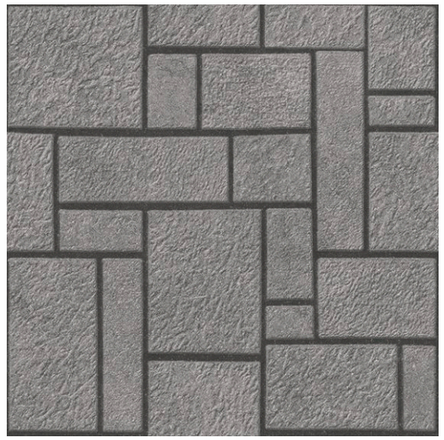

CABINA GREY
Punch - V1

360°



CABINA BLACK
Punch - V1

360°



DURELL GREY
Punch - V1

360°

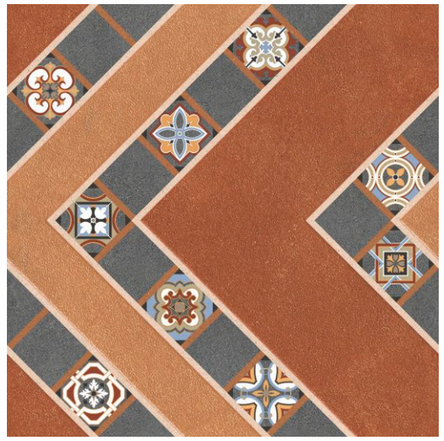

DURELL BROWN
Punch - V1

360°

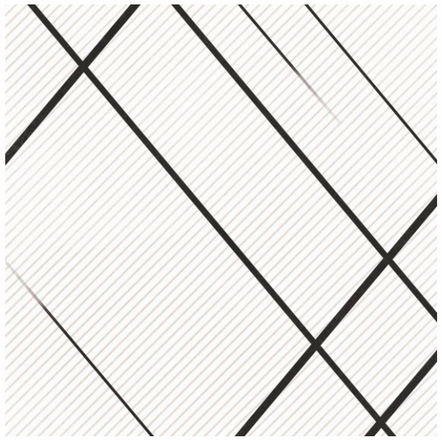

FADEN BIANCO
Punch - V4

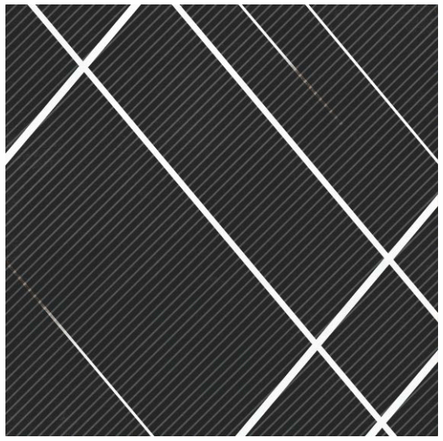

FADEN BLACK
Punch - V4

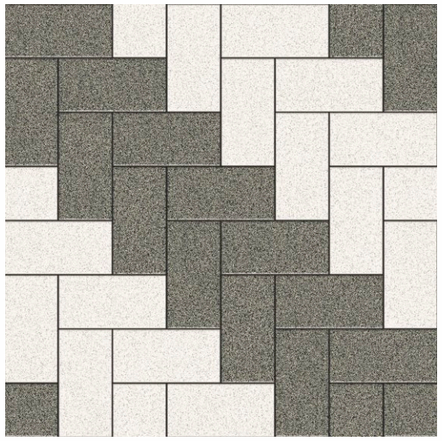

GRIDS GREY
Punch - V1

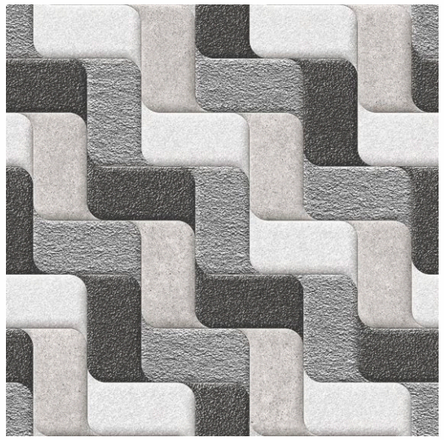

FOGGIA GREY
Punch - V1



FOGGIA BROWN
Punch - V1



FOGGIA GREEN
Punch - V1

500x500mm
11.2mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



MOTIVO BLUE
Punch - V4



MOTIVO COFFEE
Punch - V4



MOTIVO COTTO
Punch - V4



MOTIVO GREY
Punch - V4

500x500mm
11.2mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



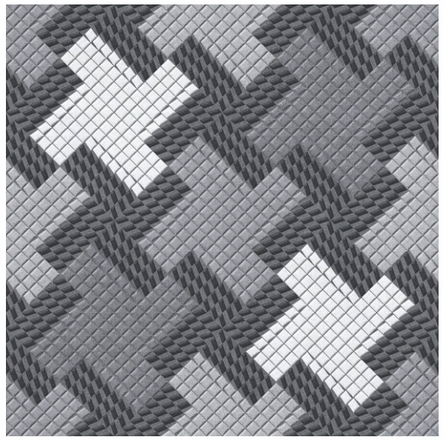

SOLUM GREY
Punch - V1



SOLUM MULTI
Punch - V1



QUARS BIANCO
Punch - V1

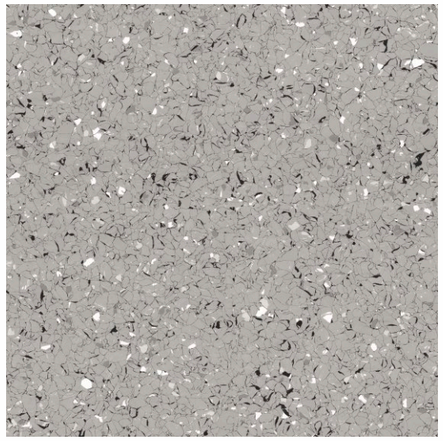

QUARS GREY
Punch - V1

FLOOR: **ZESIRO GREY**
SIZE: 500x500mm

**HEAVY DUTY** VITRIFIED TILES
SURFACE: MATT







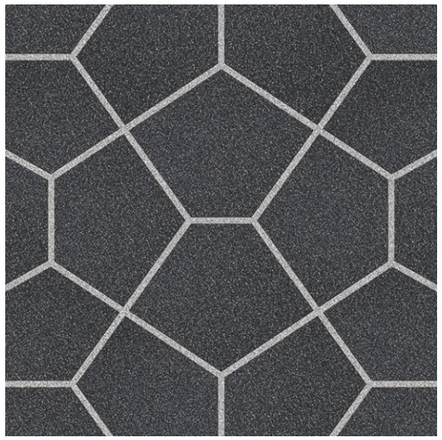

PERFIL BLACK
Punch - V1

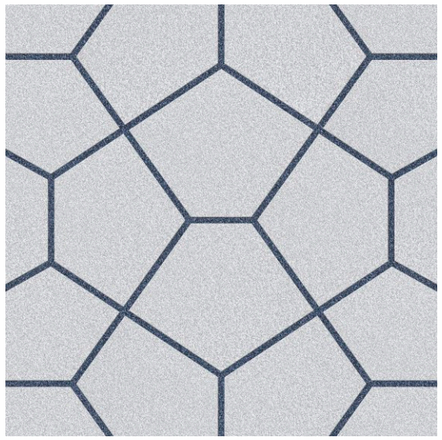

PERFIL BLUE BIANCO
Punch - V1

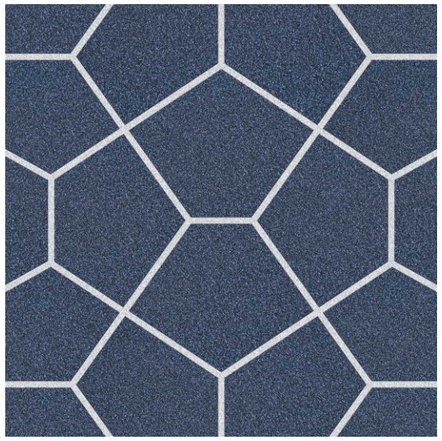

PERFIL BLUE
Punch - V1



PERFIL BROWN
Punch - V1

SPECIAL RED SERIES

500x500mm
11.2mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



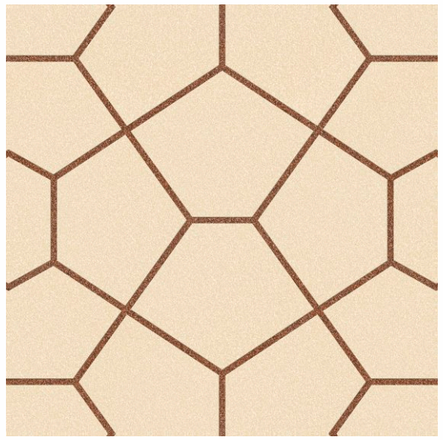

PERFIL CREMA
Punch - V1

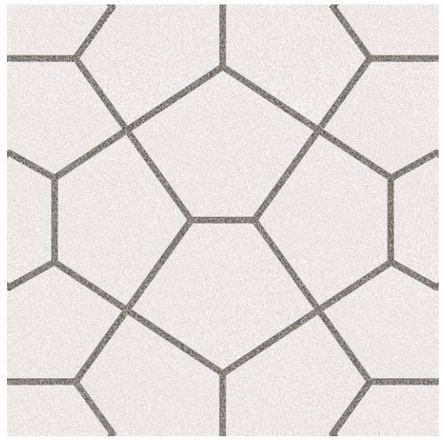

PERFIL GREY BIANCO
Punch - V1

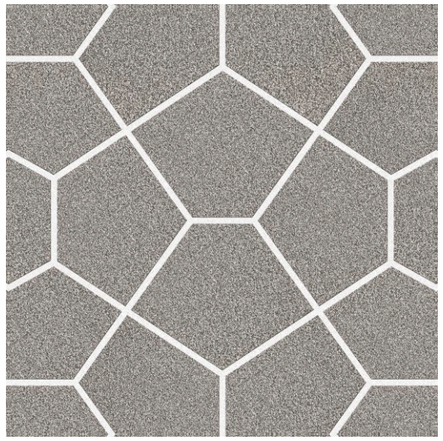

PERFIL GREY
Punch - V1

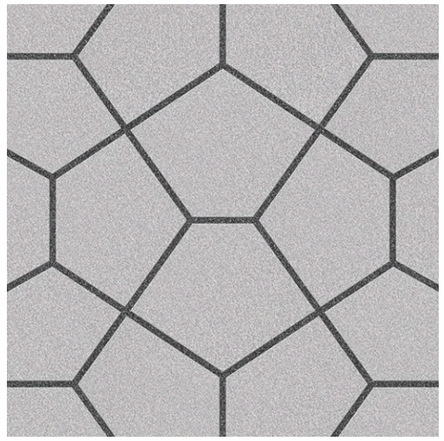

PERFIL LIGHT
Punch - V1

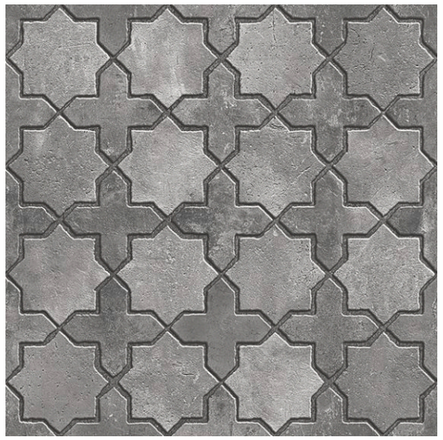

STELLO GREY
Punch - V1

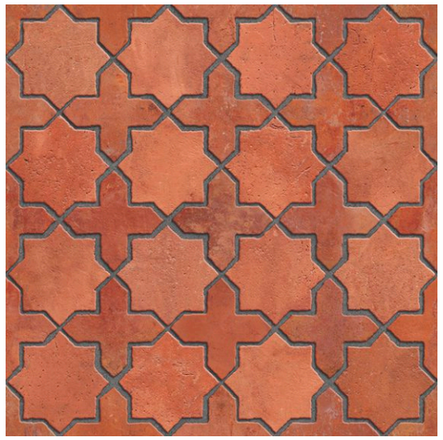

STELLO BROWN
Punch - V1

SPECIAL RED SERIES

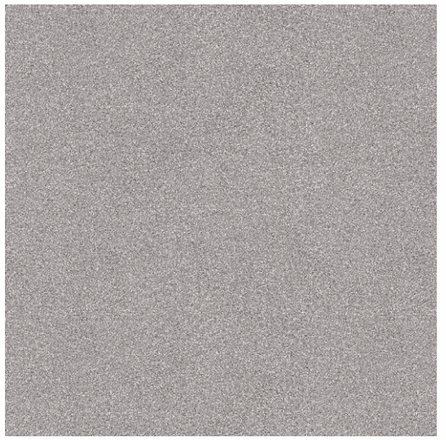

ZESIRO GREY
Punch - V1



ZESIRO NERO
Punch - V1

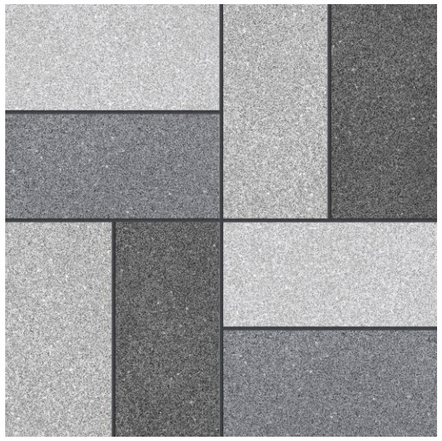

TEGEL DARK GREY
Punch - V1

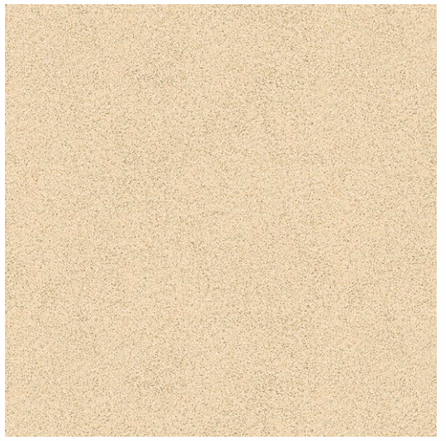

ZESIRO CREMA
Punch - V1

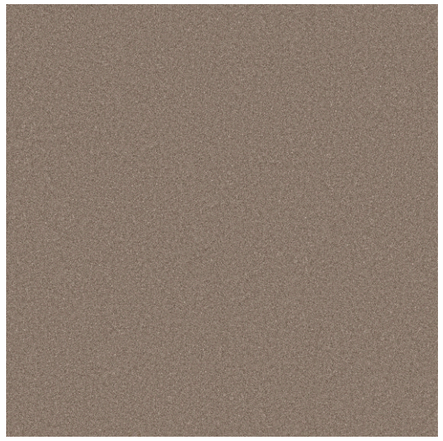

ZESIRO SAND
Punch - V1

500x500mm
11.2mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





# DURASTONE

## 400x400mm

HEAVY DUTY VITRIFIED TILES

Durastone Pavesmart's 400x400mm vitrified tiles deliver reliable performance under demanding outdoor conditions. Designed for superior durability and wear resistance, these compact tiles offer excellent flexibility for diverse paving patterns. With flexible installation options, they are ideal for residential driveways, terraces, balconies, garden pathways, sit-outs, healthcare walkways, and commercial areas.



FLOOR: **GRATIEN GREY**
SIZE: 400x400mm

**HEAVY DUTY** VITRIFIED TILES
SURFACE: MATT





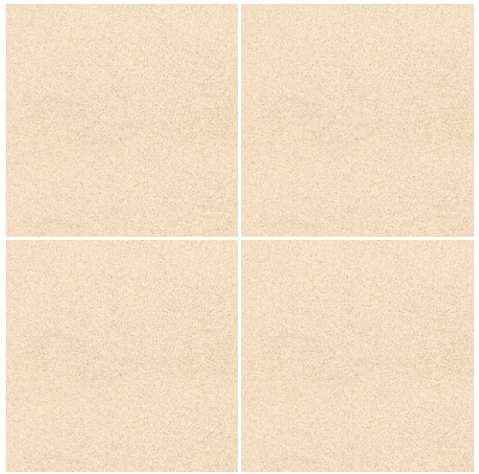

ALOMB BEIGE

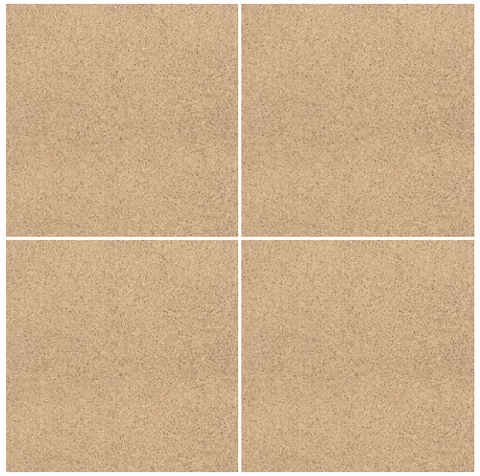

ALOMB BROWN

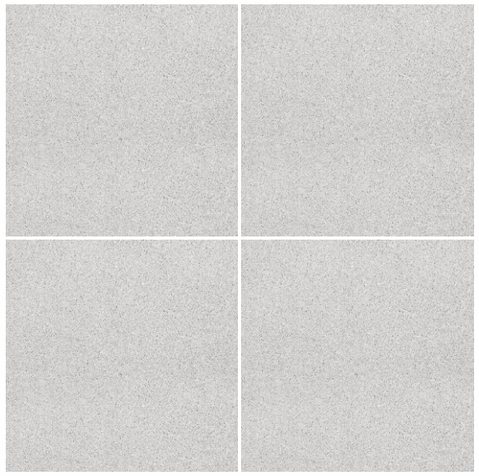

ALOMB LIGHT GREY

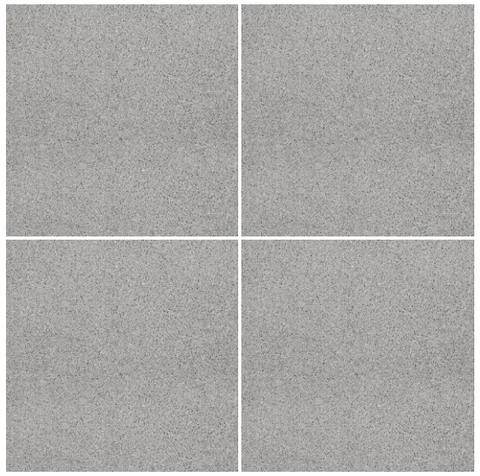

ALOMB DARK GREY

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





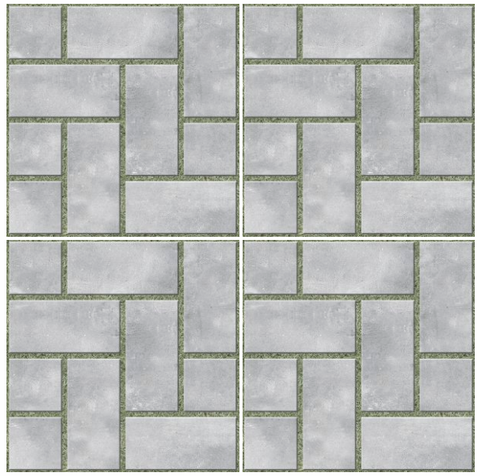

ABADIA GREY

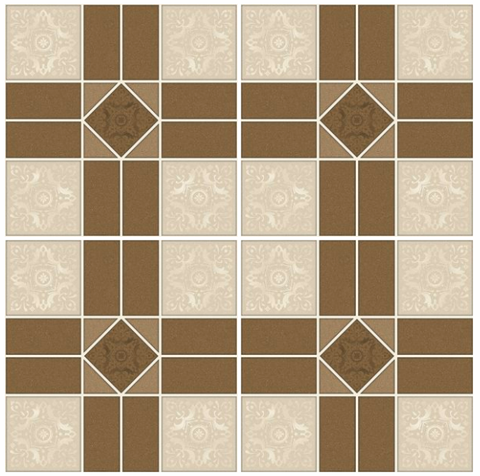

AMANS BROWN

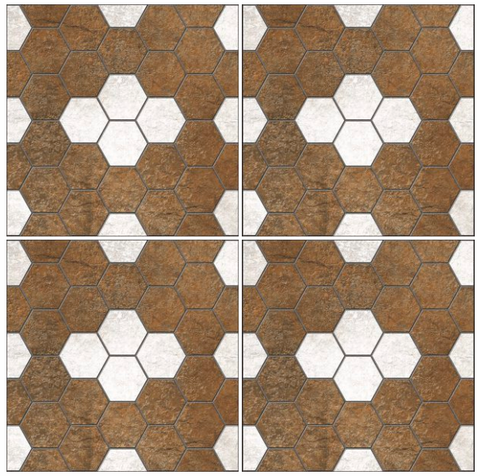

DUCAL BROWN

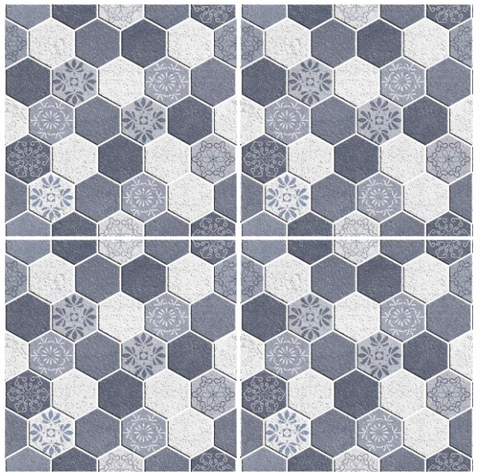

DUCAL GREY

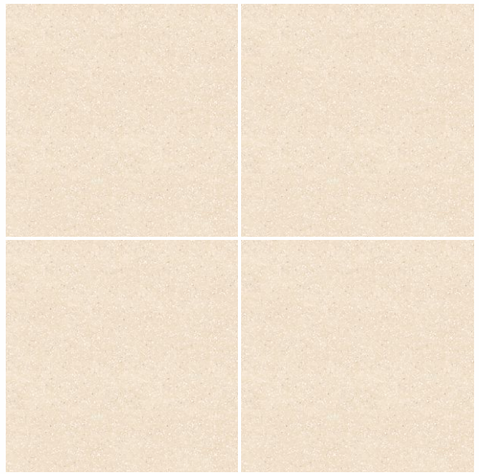

BOLSENA BEIGE

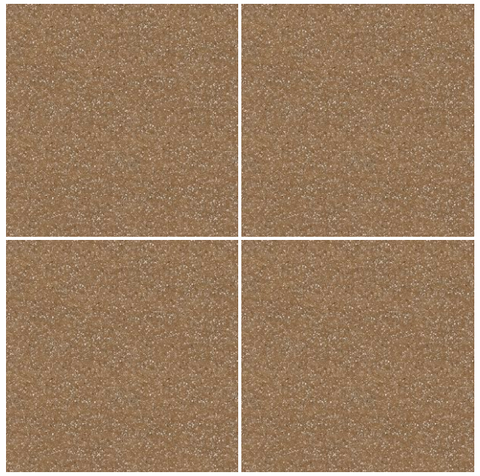

BOLSENA BROWN

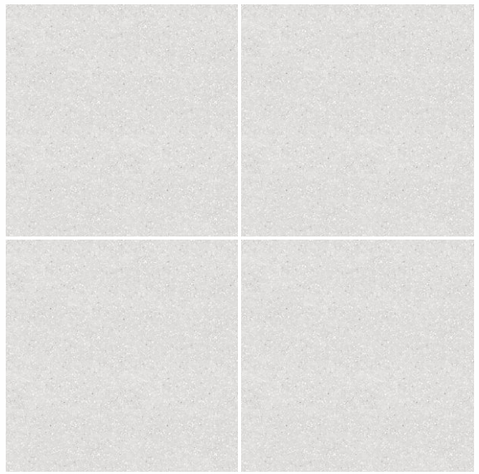

BOLSENA LIGHT GREY

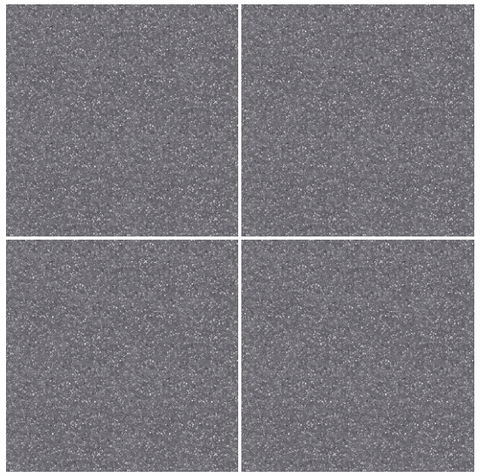

BOLSENA NERO

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid

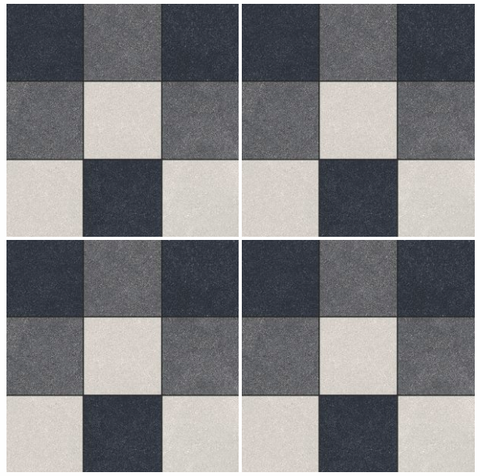

ELVINA GREY

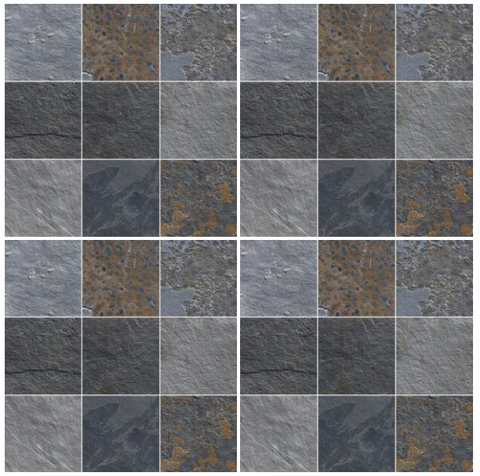

ELVINA NATURAL

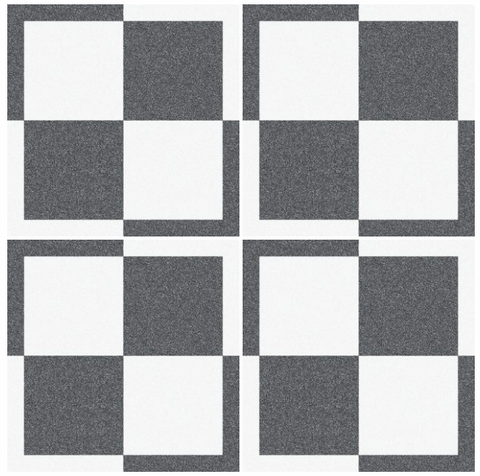

GRATIEN GREY

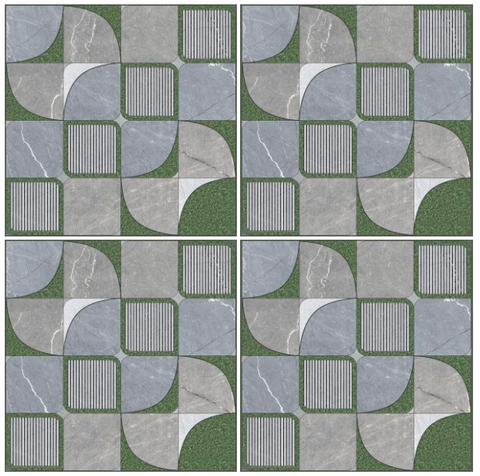

TITAN GREEN

FLOOR: **REIMS GREY**
SIZE: 400x400mm

**HEAVY DUTY** VITRIFIED TILES
SURFACE: MATT







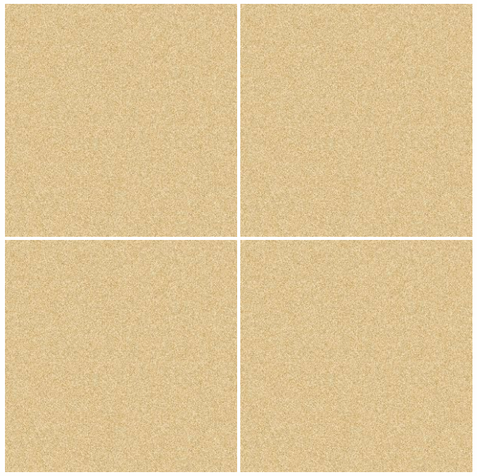

HUTTON BEIGE



HUTTON CREMA

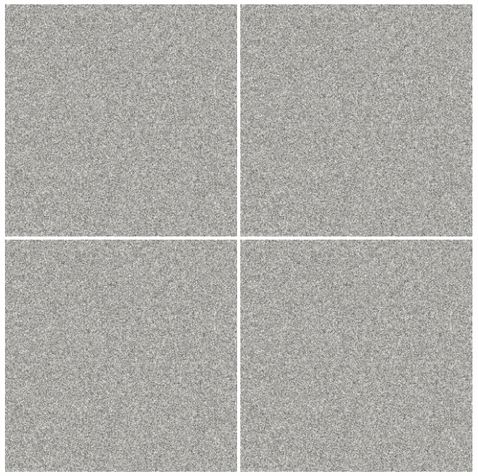

HUTTON DARK GREY

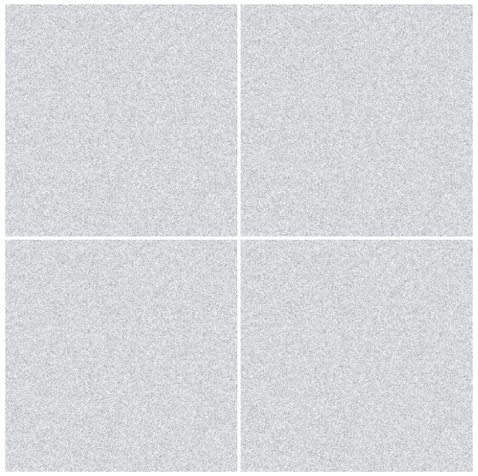

HUTTON LIGHT GREY

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





ICARO DARK



ICARO LIGHT

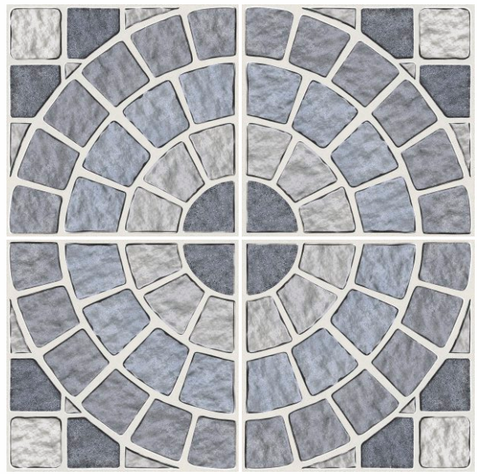

REIMS GREY



WALTER GREY

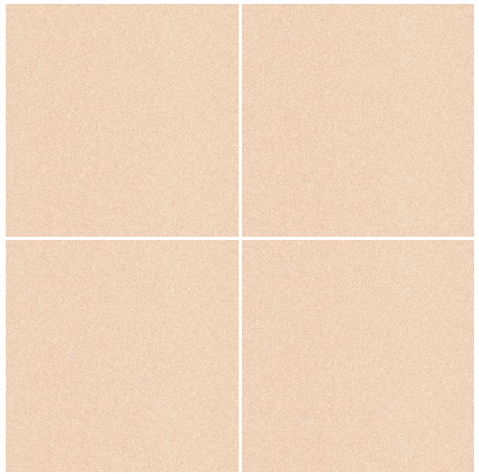

AINE BEIGE

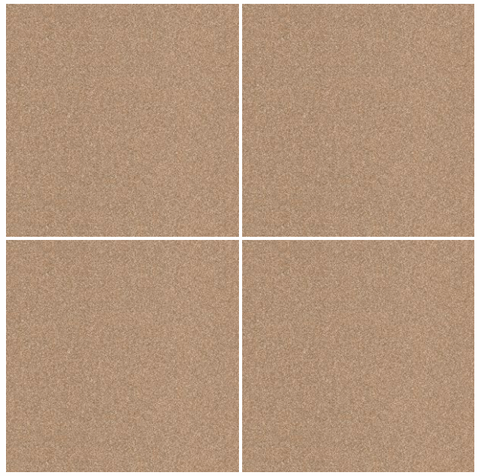

AINE BROWN

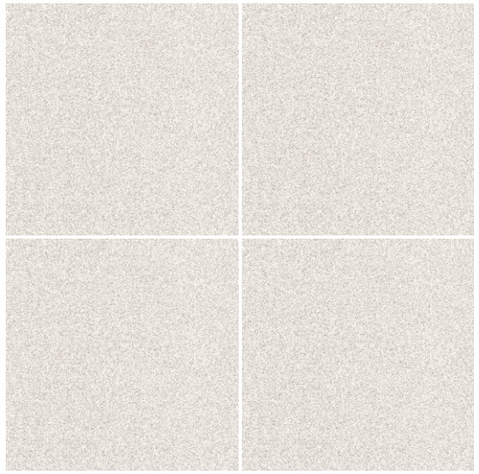

AINE BIANCO

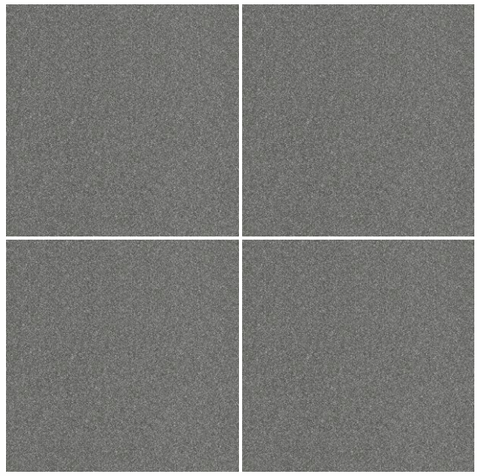

AINE NERO

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





AJAX GREY



AJAX GREY DECOR

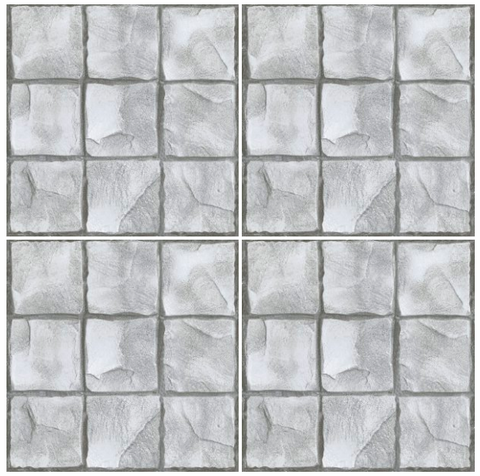

ALTA GREY



ALTA NATURAL

FLOOR: **CINZIA BROWN DECOR & CINZIA BROWN**
SIZE: 400x400mm

**HEAVY DUTY** VITRIFIED TILES
SURFACE: MATT







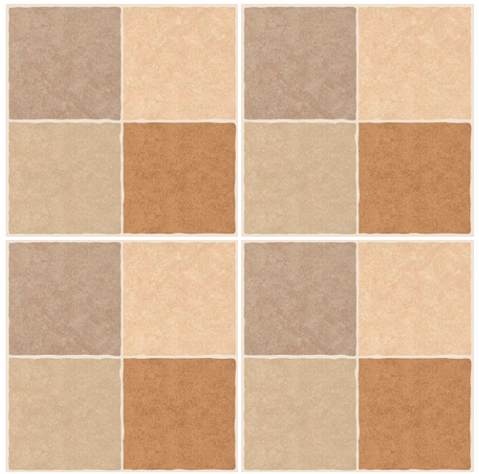

BICE BROWN

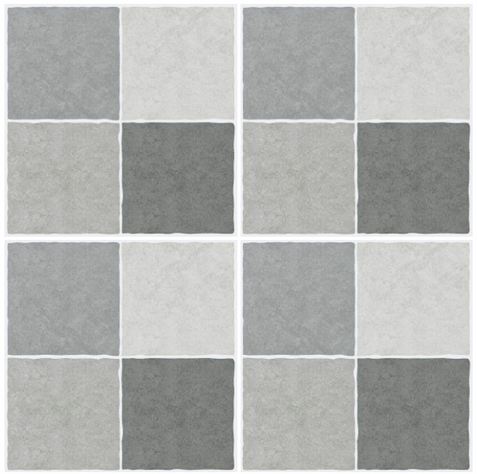

BICE GREY



CINZIA BROWN



CINZIA BROWN DECOR

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





CARITA GREY



CARITA BROWN



CARITA MULTY



CORIN RUST



CLIO BROWN



CLIO GREY



ENTIS DARK



ENTIS LIGHT

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



ENID NERO



ENID NERO DECOR



ENID COFFEE

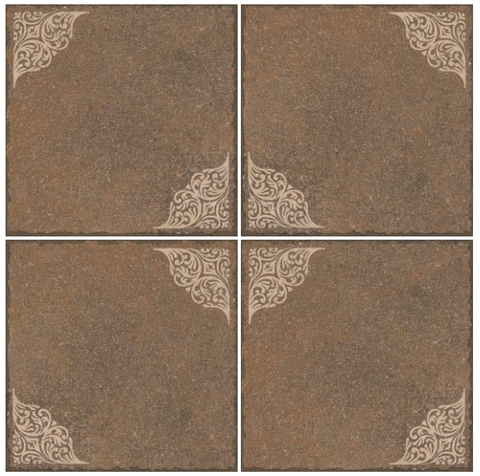

ENID COFFEE DÉCOR

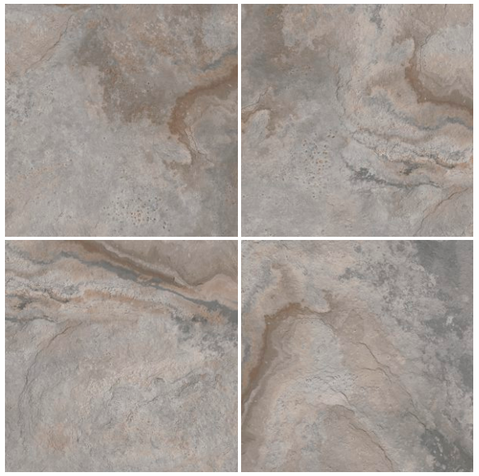

ERATO GREY

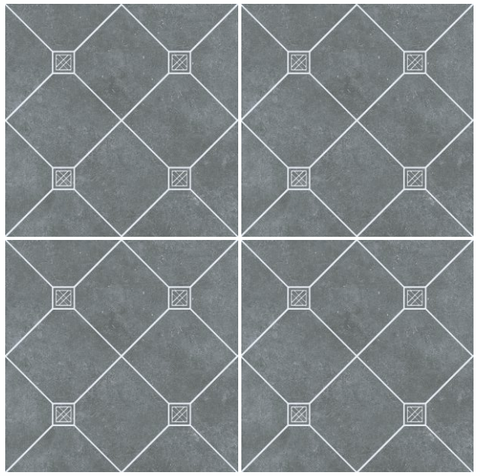

FRAZ GREY



FERRIS BEIGE



FERRIS BROWN

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid






FLOOR: **FRAZ GREY** SIZE: 400x400mm SURFACE: MATT



LUCIA COFFEE



LUCIA COFFEE DÉCOR



MATZA CHOCO

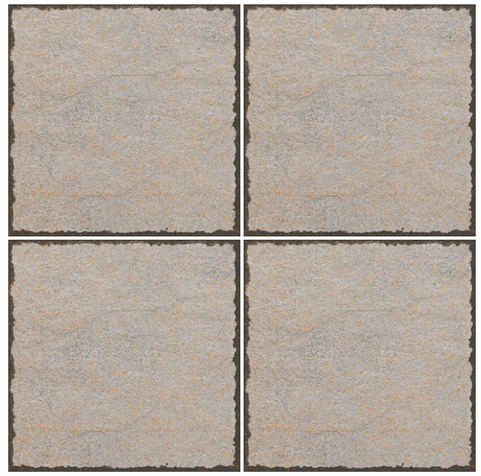

MATZA NATURAL

400x400mm
11.5mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



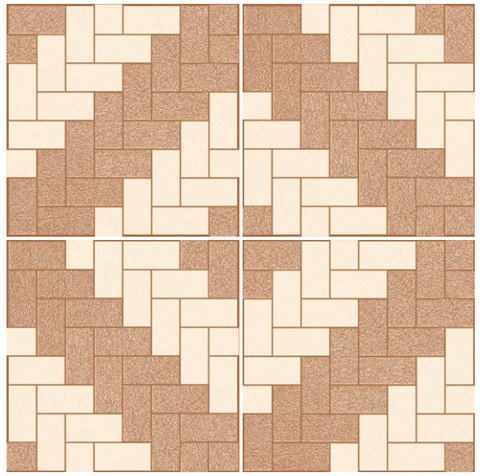

OGMA BROWN

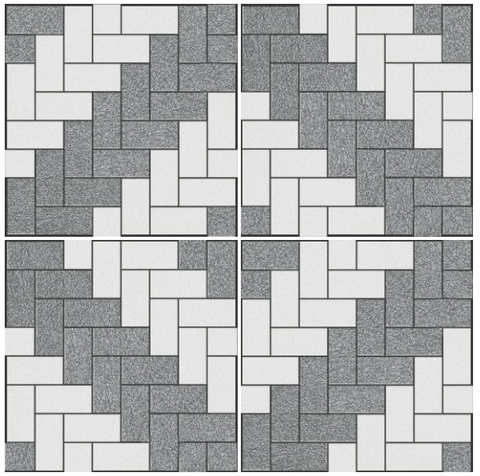

OGMA GREY



PAX BEIGE



# DURASTONE

## 300x300mm

HEAVY DUTY VITRIFIED TILES

Inspired by the raw strength of natural stone, Durastone Pavesmart's 300x300mm vitrified tiles unite durability with design elegance, enhancing garden pathways, compact driveways, balconies, terraces, and outdoor spaces. Engineered to withstand intensive foot traffic and allowing easy installation over existing concrete, Pavesmart delivers enduring performance across residential walkways, courtyards, healthcare facilities, and feature paving areas.

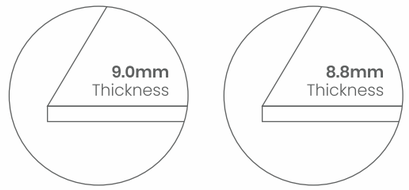

FLOOR: **ORLA GREY**
SIZE: 300x300mm

**HEAVY DUTY** VITRIFIED TILES
SURFACE: MATT





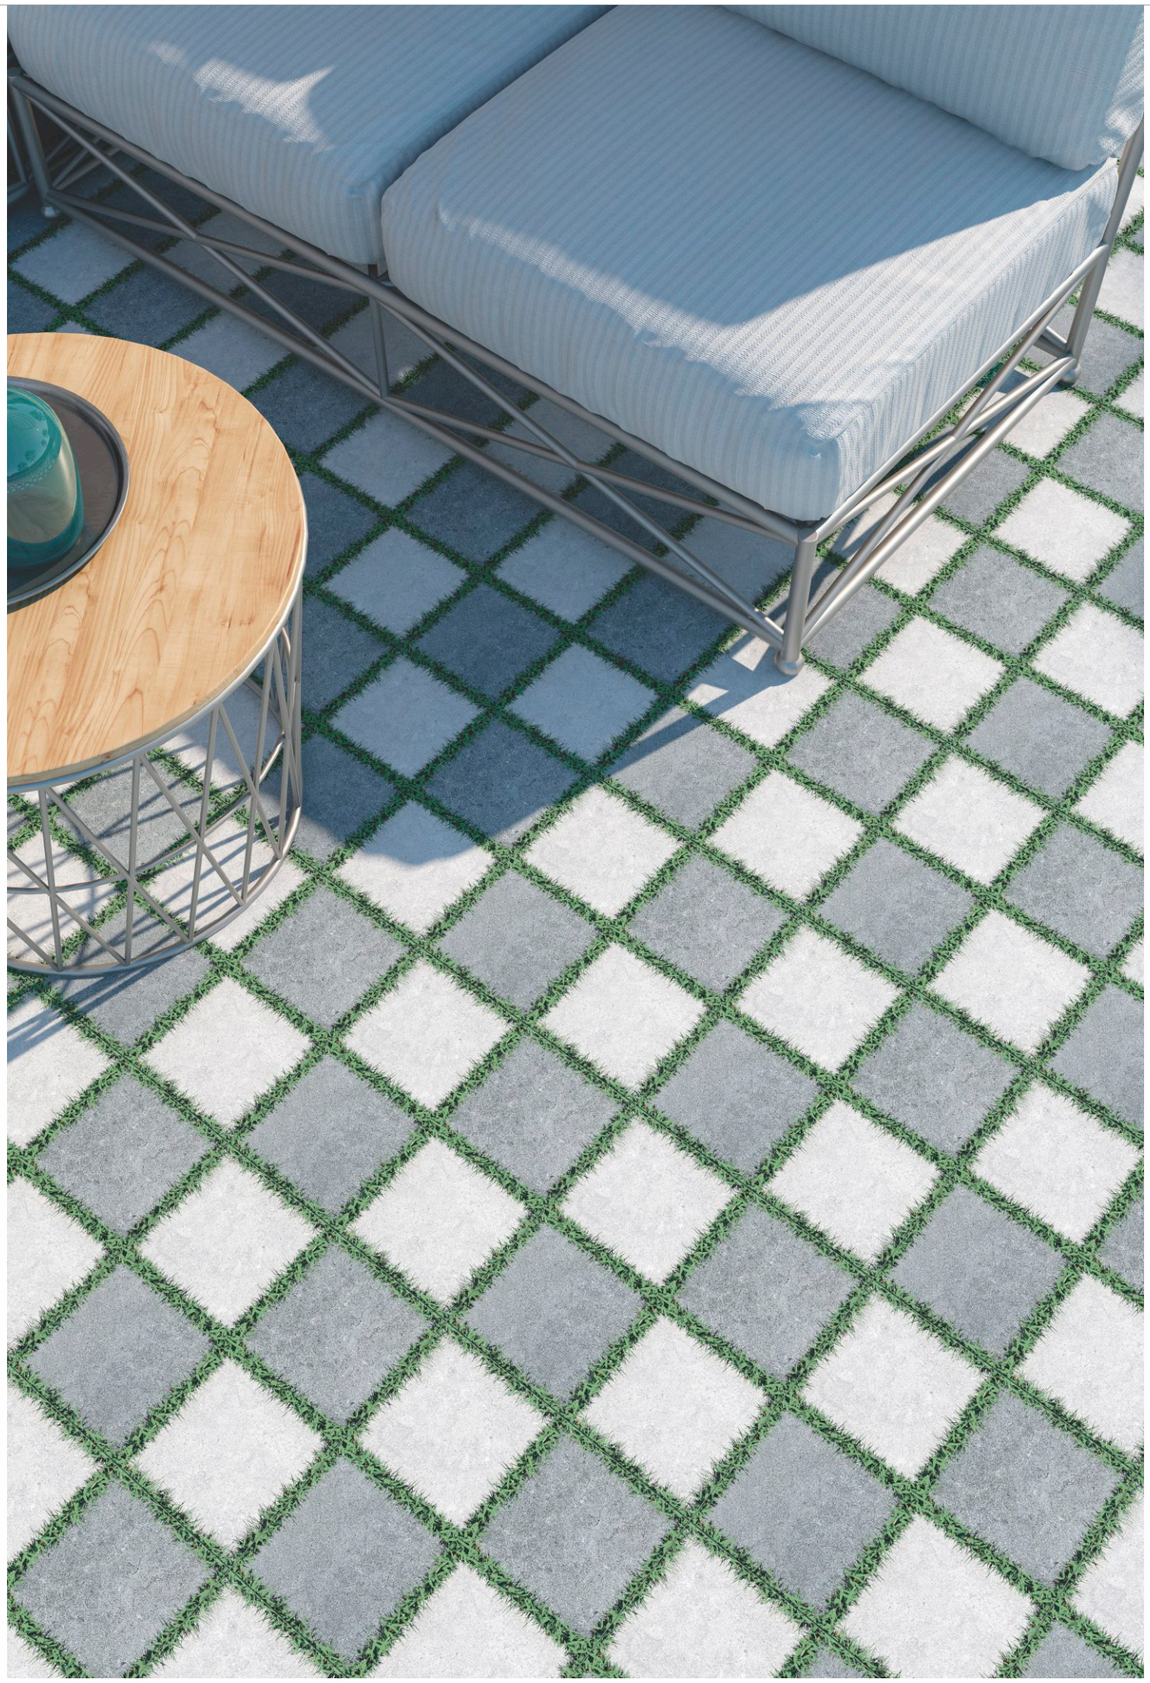

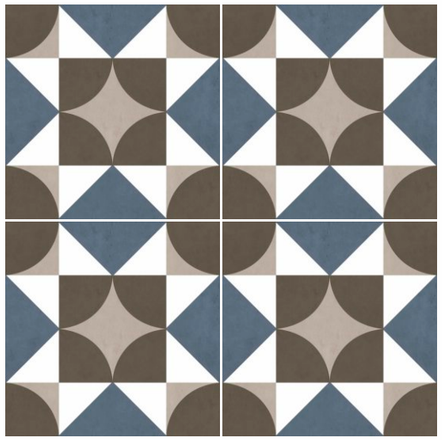

CIARA BROWN



COOL BREEZE

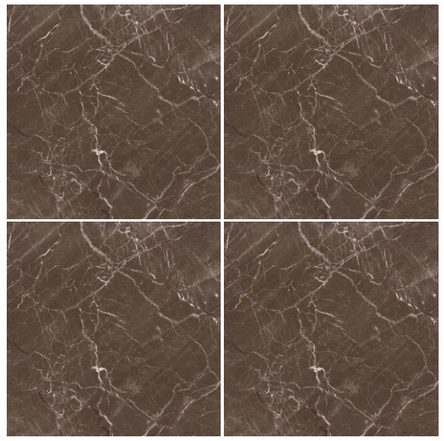

DANIA COFFEE

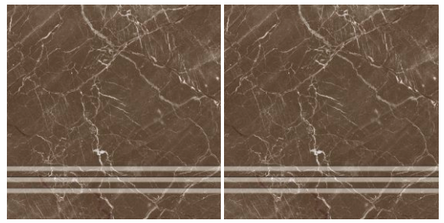

DANIA COFFEE STEP



CORA GREY

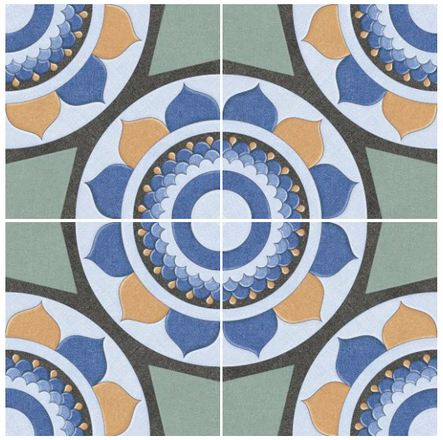

ERICA MULTI

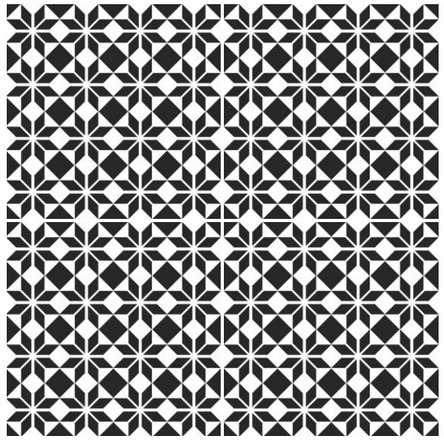

FAIZA BLACK



GEMA GRIS

300x300mm
8.8mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



GLORIA BLACK



GLORIA DARK BROWN

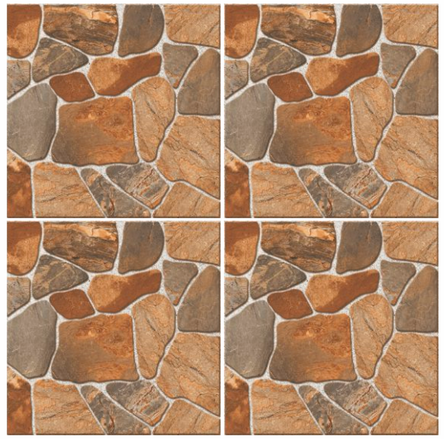

GLORIA LIGHT BROWN

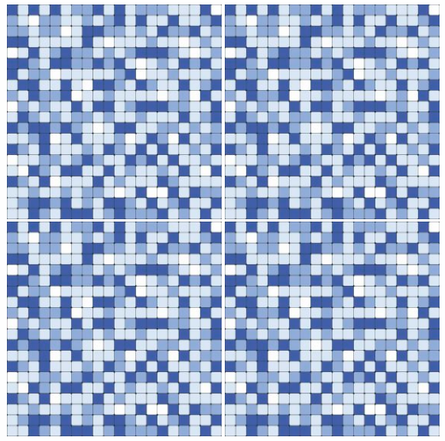

POLINA BLUE



GLORIA DARK GREY

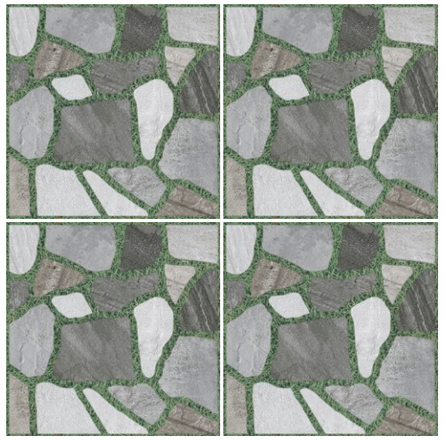

GLORIA GRIS

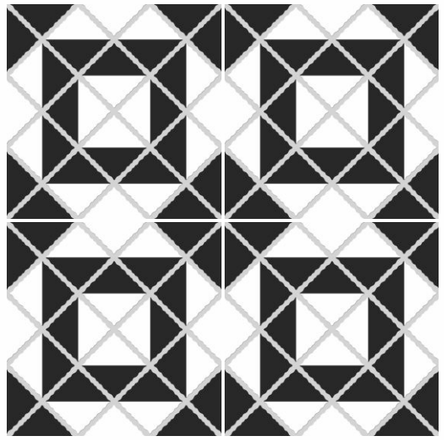

OLENA BLACK

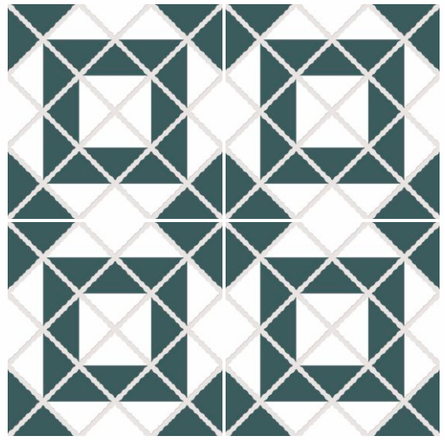

OLENA TEAL

300x300mm
8.8mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid



MILO DARK BROWN



MILO LIGHT BROWN

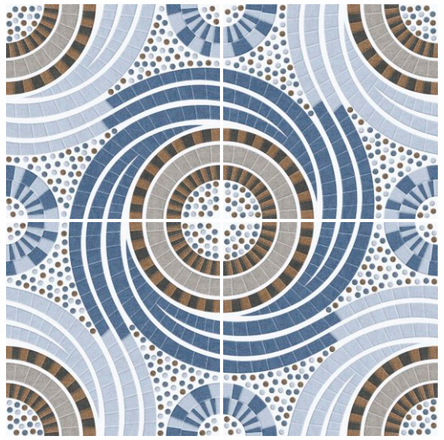

MILO BLUE



MILO MULTI

300x300mm
8.8mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





ORLA BROWN

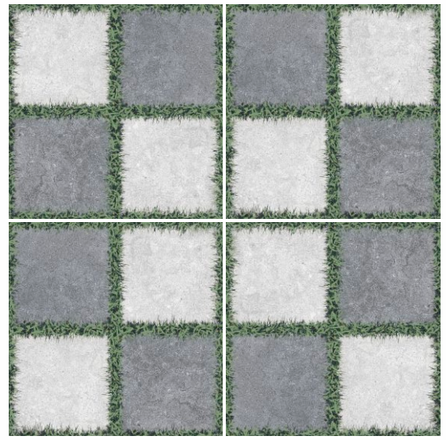

ORLA GREY

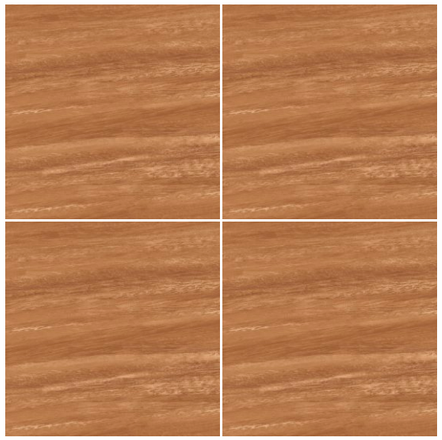

OSTARA BROWN

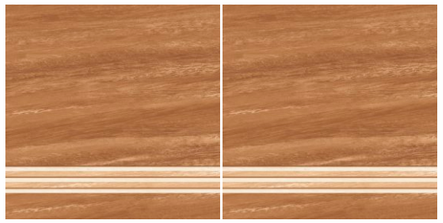

OSTARA BROWN STEP



PEREL GREY

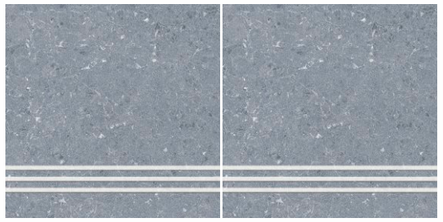

PEREL GREY STEP

300x300mm
8.8mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid





RYLAN LIGHT GREY

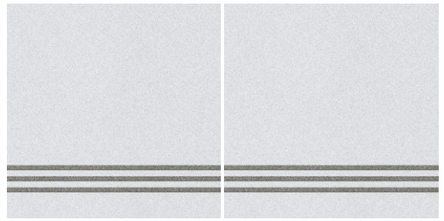

RYLAN LIGHT GREY STEP

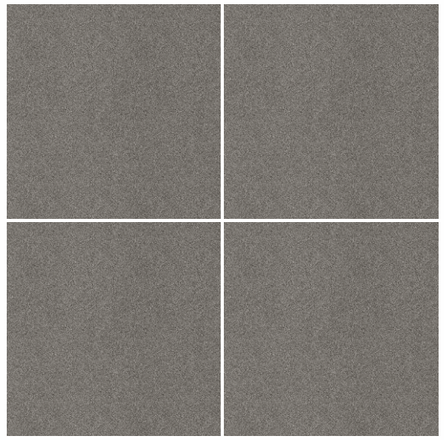

RYLAN DARK GREY

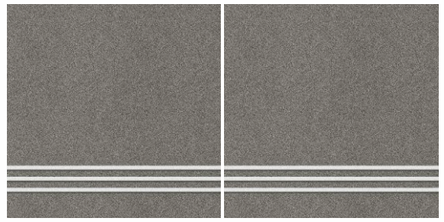

RYLAN DARK GREY STEP



RADO OTRO
COTTO



RADO OTRO
IVORY



RADO OTRO
BOLT COTTO



RADO OTRO
BOLT IVORY



RADO OTRO
KUBO COTTO



RADO OTRO
KUBO IVORY

300x300mm
8.8mm Thickness

Minimum 5mm
spacer recommended

Anti
Skid





RADO OTRO
MIKADO COTTO



RADO OTRO
MIKADO IVORY



RADO OTRO
STELLA COTTO



RADO OTRO
STELLA IVORY



RADO OTRO
TABLETTE COTTO



RADO OTRO
TABLETTE IVORY

# DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

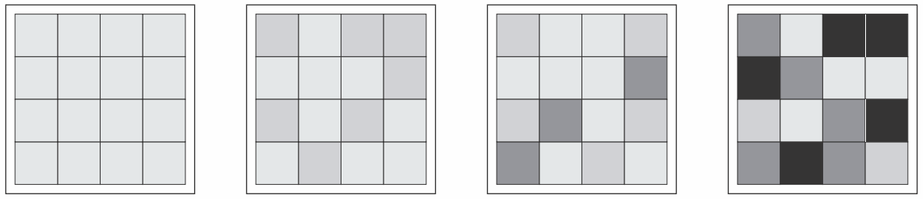

**V1** Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation





## TECHNICAL SPECIFICATION

| PACKAGING DETAIL FOR PAVESMART COLLECTION | | | | |
|---|---|---|---|---|
| **Nominal Sizes (mm)** | **Thickness** | **Avg. Wt. Per Box (Kg.)** | **No. of Tiles Per Box** | **Coverage Area Per Box** |
| 500X500mm | 11.2mm | 18.5 kg | 3 | 0.75 sq meter / 8.07sq feet |
| 400X400mm | 11.5mm | 19.5 kg | 5 | 0.80 sq meter / 8.61sq feet |
| 300x300mm | 8.8mm | 13.0 kg | 8 | 0.72 sq meter / 7.75sq feet |
| 300X300mm (Cool Breeze) | 9.0mm | 14.0 kg | 8 | 0.72 sq meter / 7.75sq feet |

| TECHNICAL SPECIFICATION FOR PAVESMART COLLECTION | | | | |
|---|---|---|---|---|
| **Characteristics** | **Requirement as per ISO 13006:2018 0.5%≤ 3.0% Group BIb** | **Requirement as per IS 15622:2017 0.08 < E ≤ 3.0 Group BIb** | **Our value** | **Test Method** |
| Dimension & Surface Quality | | | | |
| Length & Width | ± 0.3% | ± 0.1% | ± 0.10% | IS 13630 Part 1/ISO 10545-Part 2 |
| Thickness | ± 5.0% | ± 5.0% | ± 4.0% | |
| Straightness of Side | ± 0.30% | ± 0.1% | ± 0.10% | |
| Rectangularity | ± 0.30% | ± 0.1% | ± 0.10% | |
| Surface Flatness | | | | |
| Center curvature (%) ( max.Deviation) | ± 0.40% | ± 0.5% | ± 0.2% | |
| Edge curvature (%) ( max.Deviation) | ± 0.40% | ± 0.5% | ± 0.2% | |
| Corner warpage (%)( max.Deviation) | ± 0.40% | ± 0.5% | ± 0.2% | |
| Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| Physical Properties | | | | |
| Water Absorption | 0.5 % < Ev ≤ 3.0 % Ind.3.3% Max | Av. 0.08< E ≤ 3.0 | Av < 3.0 % | IS 13630 Part 2/ ISO 10545-Part 3 |
| Modulus of Rupture [N/mm$^2$] | Av 30, Individual 27 min | Av 30, Individual 27 min | Avg.> 30 | IS 13630 Part 6/ISO 10545-Part 4 |
| Breaking Strength in N | 1100 N | 1100 N | Min 1100 N | |
| Moisture Expansion in mm/m | Test Method Available | 0.02 max | Max 0.02 | IS 13630 Part 3/ISO-10545-Part 10 |
| Scratch Hardness of surface (Mohs) | N/A | Min 5 | Min-6 | IS 13630 Part-13 |
| Resistant to Surface Abrasion of Glaze Tiles | Min Class II | Min II | Gr IV | IS 13630 Part 11/ISO 10545 -Part 7 |
| Coefficient of linear thermal expansion from ambient temperature to 100$^o$ C | Test Method Available | Max 7 X 10 -$^6$ K-$^1$ max | Max 6 X 10 -$^6$ K-$^1$ max | IS 13630 Part 4/ISO 10545-Part 8 |
| Thermal Shock Resistant | Required | Min 10 cycle passed | 10 cycle passed | IS 13630 Part 5/ISO-10545-Part 9 |
| Crazing Resistant | N/A | 4 cycle @ 7.5bar min | 4 cycle passed | IS 13630 Part 9/ISO 10545-Part 11 |
| Impact Resistant as Co-efficient of Restitution (COR) | Test Method Available | 0.55 Min | Min 0.55 | IS 13630 Part 5/ISO 10545-Part 14 |
| Frost Resistant | Required | Required if Agreed | 100 Cycle Passed | IS 13630 Part 10/ISO 10545-Part 12 |
| Chemical Resistant (Glazed Tiles) | | | | |
| Stain Resistant | Min Class 3 | Min Class 1 | Min Class 2 | IS 13630 Part 8/ISO 10545-Part 14 |
| Resistant to household chemicals | Minimum B | Required if Agreed | Min Class AA | IS 13630 Part 8/ ISO 10545-Part 14 |
| Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds) | Declared Value$^f$ | Required if Agreed | Min Class A | |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE



# TILE VISUALISER

SOMANY

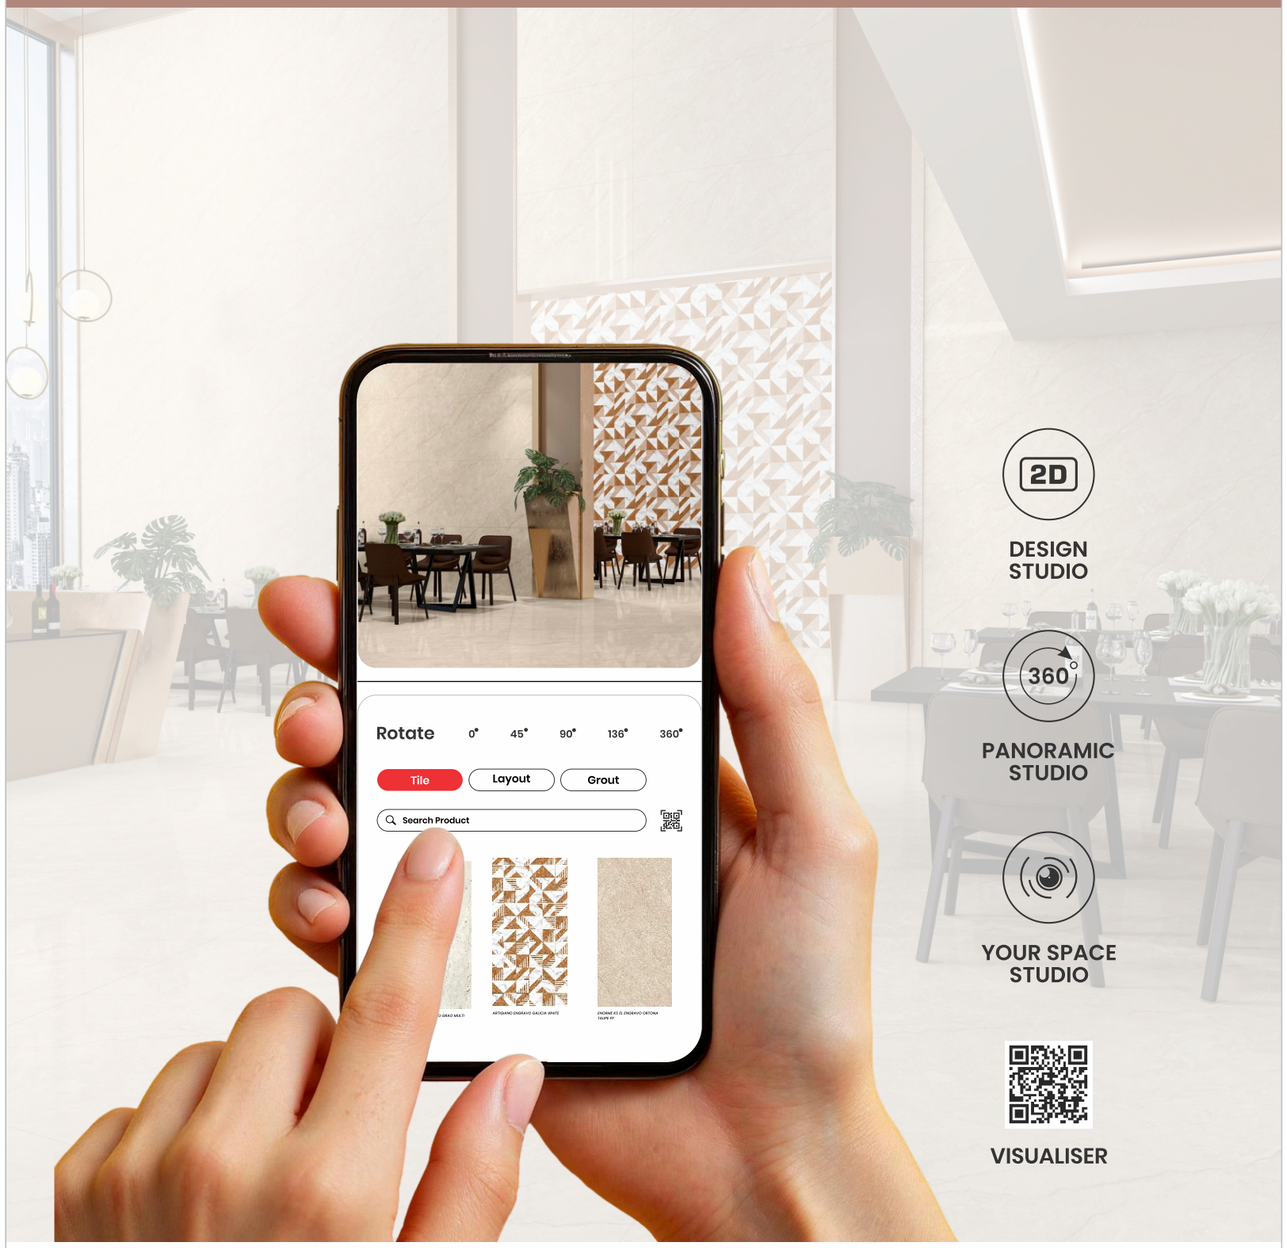


**Choosing the perfect tile for your dream home should be exciting, not overwhelming!** With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

**Your dream tile? Just a click away.**

Toll Free: 1800-103-0004 | www.somanyceramics.com

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner




## Lasting Bonds Made Ezy

**Behind Every Stunning Tile, there's a Stronger Bond!**
Experience the power of reliable tiling with Somany EZY Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany EZY Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at **www.somanyceramics.com** or call on **Toll Free: 1800 103 0004**

SOMANY Bathware

SOMANY *French Collection*



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome

Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com