NEW ARRIVAL VOL 1 | SEPT 2025

UNIT 03

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

DURASTONE

SPESSO
collection

600 x 600mm

NEW ARRIVAL
—
SEPT 2025

UNIT 03

SOMANY



SPESSO COLLECTION

Durastone by Somany was born with a vision: to harness the untamed beauty of natural stone and forge it into a surface that thrives where others falter. With the SPESSO Collection, this aspiration takes form—where breathtaking aesthetics converge with unwavering endurance and lasting durability. Available in a 600×600mm format with a 9.2mm thickness and a refined matt finish, ideally sized for both residential spaces and expansive commercial applications. Each piece captures the authentic textured essence of natural stone, bringing forth rich earthy tones and nuanced patterns that breathe quiet elegance into outdoor spaces. From sun-drenched patios to bustling driveways, intimate courtyards to expansive terraces, these tiles boast remarkable chromatic properties that remain unfazed by UV exposure. With their exceptional resistance to fading and weathering, they maintain their pristine beauty year after year.

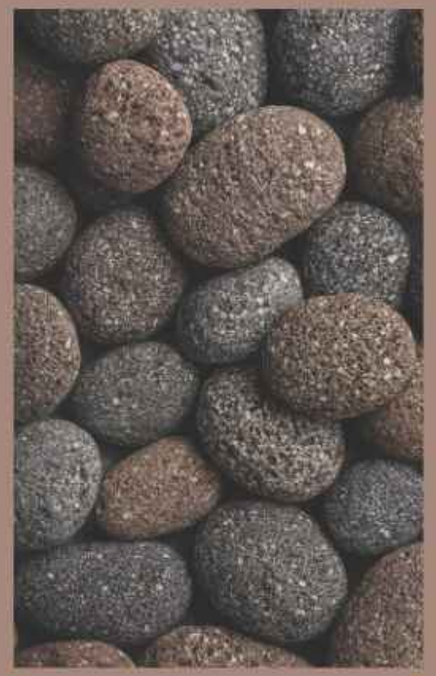







TECHNICAL FEATURES

- ANTI SKID
- EASY TO CLEAN & MAINTAIN
- CHROMATIC PROPERTIES
- CHEMICAL RESISTANT
- FROST RESISTANT
- HIGH FLEXURAL STRENGTH
- WEAR RESISTANT
- SCRATCH RESISTANT
- FIRE RESISTANT
- INDOOR & OUTDOOR
- ECO FRIENDLY & RECYCLABLE

APPLICATION AREAS

- RESIDENTIAL AREAS
- COMMERCIAL AREAS
- HOSPITALS
- SHOPS AND MALLS
- HOTELS AND RESTAURANTS
- SCHOOLS AND COLLEGES
- OUTDOOR FURNITURE
- PUBLIC PLACES
- INDUSTRIAL AREAS
- PHARMACEUTICALS AREAS
- DIAGNOSTICS & CHEMICAL LABS





DURASTONE

Inspired by stone's raw essence and built with unmatched durability, these vitrified tiles excel in both residential and commercial settings. In a sleek 600×600mm format with a 9.2mm thickness and refined matt finish, they withstand heavy use and harsh weather while maintaining their elegant textures and earthy tones—bringing resilience and quiet sophistication to patios, driveways, courtyards, and terraces.

SUITABLE FOR OUTDOOR AREAS

SUITABLE FOR HIGH TRAFFIC AREAS

STRONG & DURABLE

600x 600mm

Thickness **9.2mm**

FLOOR: **NEO SPESSO BEIGE** FULL BODY TILES | SIZE: 600x600mm | SURFACE: MATT





FLOOR: **NEO SPESSO BEIGE** FULL BODY TILES | SIZE: 600x600mm | SURFACE: MATT

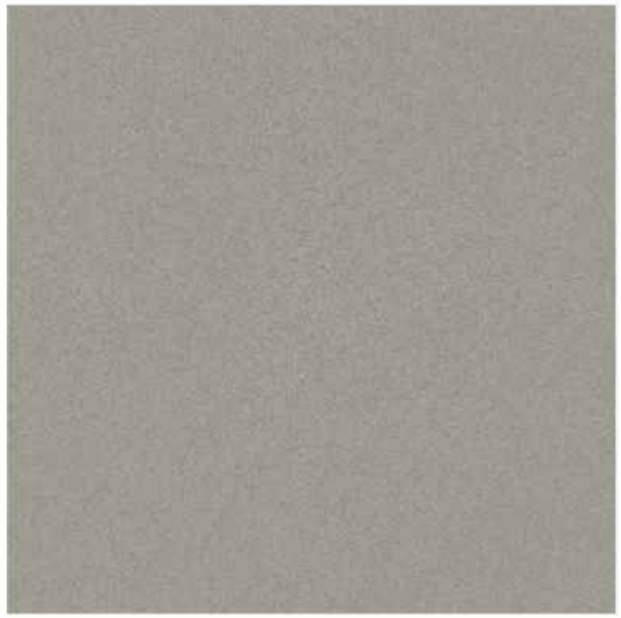

NEO SPESSO BEIGE

FULL BODY TILES
SIZE: 600x600mm
SURFACE: MATT

360°

SPESSO
COLLECTION

FLOOR: **NEO SPESSO CREMA** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT

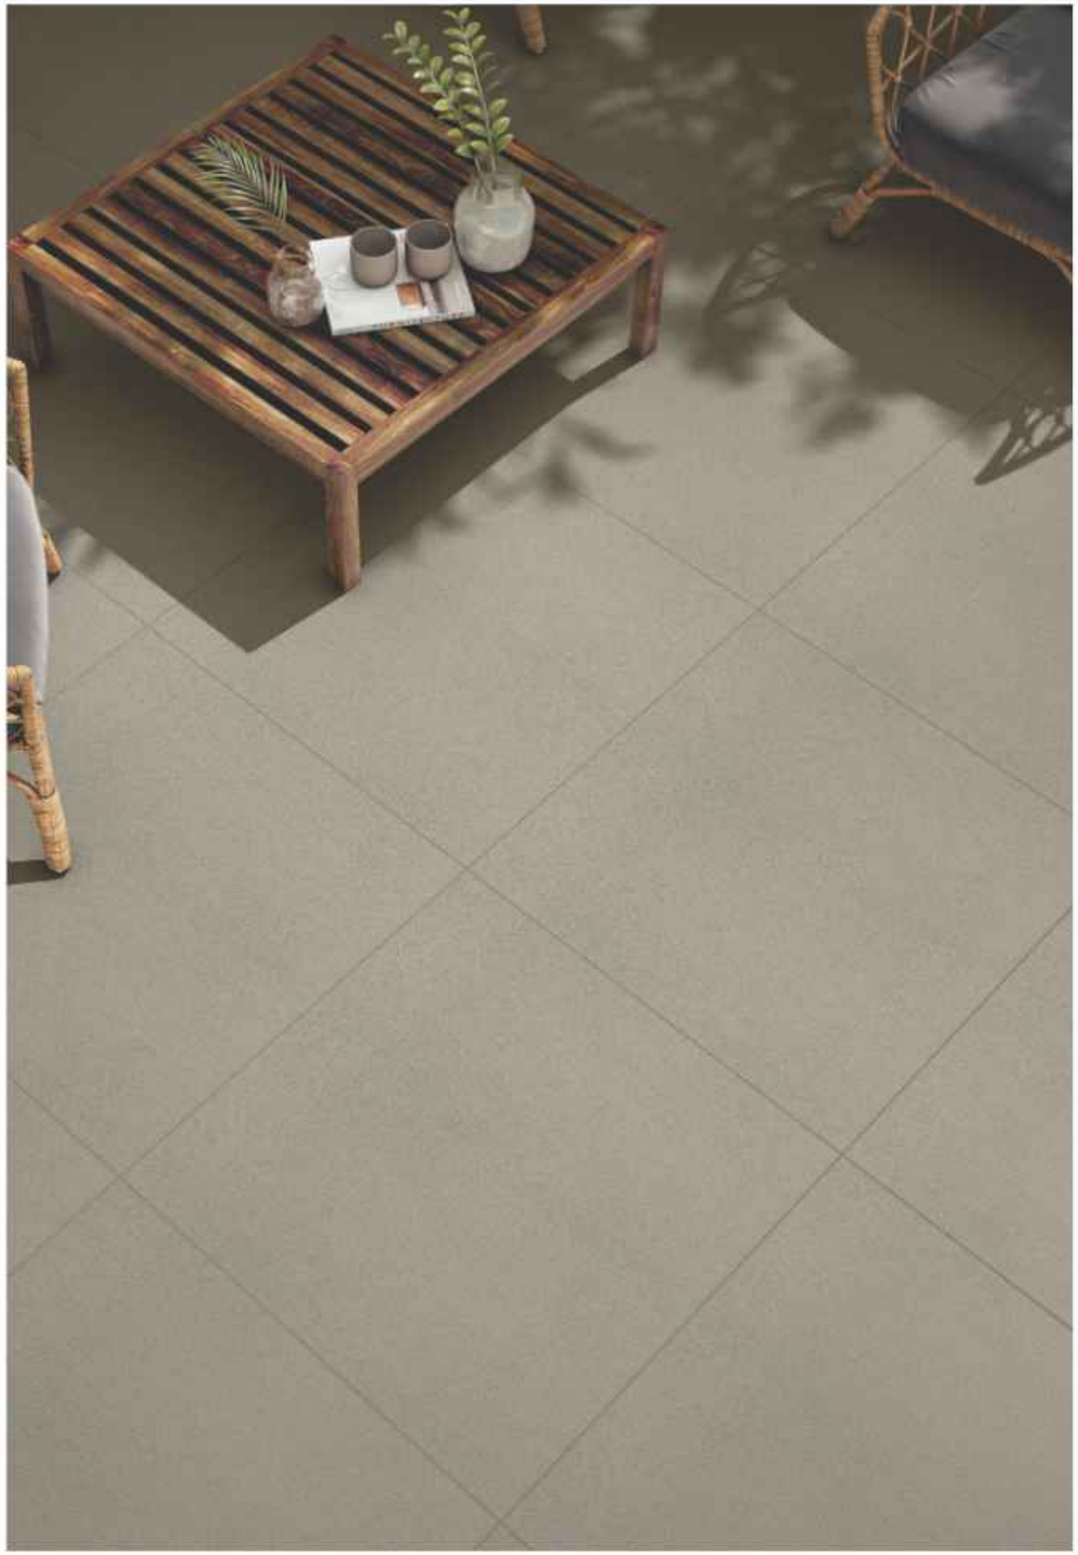



FLOOR: **NEO SPESSO CREMA** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT



NEO SPESSO CREMA

FULL BODY TILES
SIZE: 600x600mm
SURFACE: MATT

360°

SPESSO
COLLECTION

FLOOR: **NEO SPESSO WHITE** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT



FLOOR: **NEO SPESSO WHITE** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT



NEO SPESSO WHITE

FULL BODY TILES
SIZE: 600x600mm
SURFACE: MATT

360°

SPESSO
COLLECTION

FLOOR: **NEO SPESSO GREY LIGHT** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT





FLOOR: **NEO SPESSO GREY LIGHT** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT



NEO SPESSO GREY LIGHT

FULL BODY TILES
SIZE: 600x600mm
SURFACE: MATT

360°

SPESSO
COLLECTION

FLOOR: **NEO SPESSO GREY DARK** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT





FLOOR: **NEO SPESSO GREY DARK** FULL BODY TILES | SIZE: 600X600mm | SURFACE: MATT

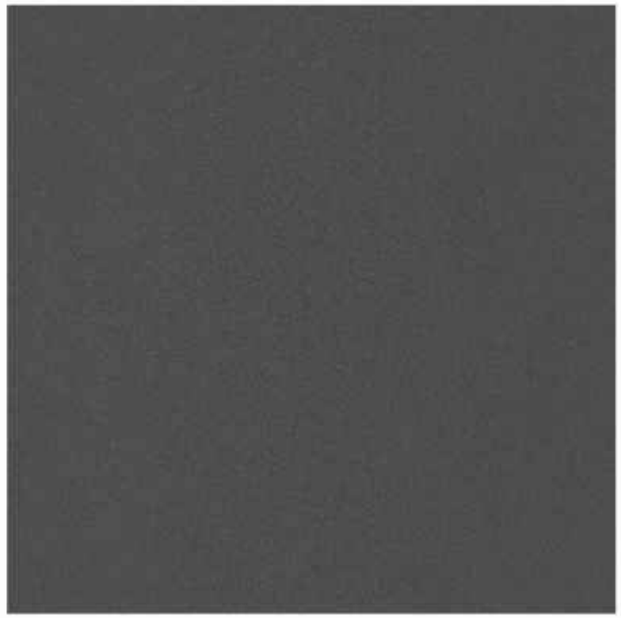

NEO SPESSO GREY DARK

FULL BODY TILES
SIZE: 600x600mm
SURFACE: MATT

360°

SPESSO
COLLECTION

PACKAGING DETAIL FOR SPESSO COLLECTION				
Nominal Size	**Thickness**	**Avg. Wt. Per Box (Kg.)**	**No. of Tiles Per Box**	**Coverage Area Per Box**
600X600mm (SPESSO)	9.2mm	29 kg	4	1.44 sq meter / 15.50sq feet

TECHNICAL SPECIFICATION FOR SPESSO COLLECTION				
Characteristics	**Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a**	**Requirement as per IS 4457:2007 (Reaffirmed- 2012) ≤ 0.5%**	**Our value**	**Test Method**
Dimension & Surface Quality				
Length & Width	± 0.3%	± 0.5%	± 0.10%	ISO 10545-Part 2/ IS 4457 Annex B
Thickness	± 5.0%	± 5.0%	± 4.0%	
Straightness of Side	± 0.30%	± 0.20%	± 0.10%	
Rectangularity	± 0.30%	± 0.20%	± 0.10%	
Surface Flatness				
Center curvature (%) (max.Deviation)	± 0.40%	± 0.30%	± 0.2%	
Edge curvature (%) (max.Deviation)	± 0.40%	± 0.30%	± 0.2%	
Corner warpage (%)(max.Deviation)	± 0.40%	± 0.30%	± 0.2%	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avg. 0.5 %, Individual 0.6% max	Avg. 0.5 %, Individual 0.6% max	Avg. < 0.5 %	ISO 10545-Part 3/ IS 4457 Annex C
Modulus of Rupture [N/mm²]	Avg. 35, Individual 32 min	Avg. 35, Individual 32 min	Avg.> 35	ISO 10545-Part 4/ IS 4457 Annex D
Breaking Strength in N	Min 1300 N	Min 1300 N	Min 1500 N	
Moisture Expansion in mm/m	Test Method Available	Not Available	Max,0.02	ISO-10545-Part 10
Scratch Hardness of surface (Mohs)	N/A	Not Available	Min-6	IS 13630 Part-13
Resistant to Deep Abrasion (In mm^3)	Max. 175	Max. 175	Max. 140	ISO 10545 -Part 6/ IS 4457 Annex E
Coefficient of linear thermal expansion from ambient temperature to 100° C	Test Method Available	Not Available	Max 6 X 10 $^{-6}$ K^{-1} max	ISO 10545-Part 8
Thermal Shock Resistant	Required	Not Available	10 cycle passed	ISO-10545-Part 9
Crazing Resistant	N/A	Not Available	4 cycle passed	ISO 10545-Part 11
Impact Resistant as Co-efficient of Restitution (COR)	Test Method Available	Not Available	Min 0.55	ISO 10545-Part 5
Frost Resistant	Required	Not Available	100 Cycle Passed	ISO 10545-Part 12
Chemical Resistant (Glazed Tiles)				
Stain Resistant	Min Class 3	Not Available	Min Class 2	ISO 10545-Part 14
Resistant to household chemicals	Minimum B	Test Method Available	Class UA	ISO 10545-Part 13/ IS 4457 Annex F
Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Declared Value'	Test Method Available	Class ULA (Low Conc) Class UHA (High Conc)	
Resistant to Concentrated HNO_3 & H_2SO_4	Not Available	Loss of mass not excees 1.5%	Loss Less Than 1.5%	IS 4457 Annex G

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

NOTE

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Soza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com