
SOMANY

**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**

**DURASTONE** / CAT / NOVEMBER - 2024

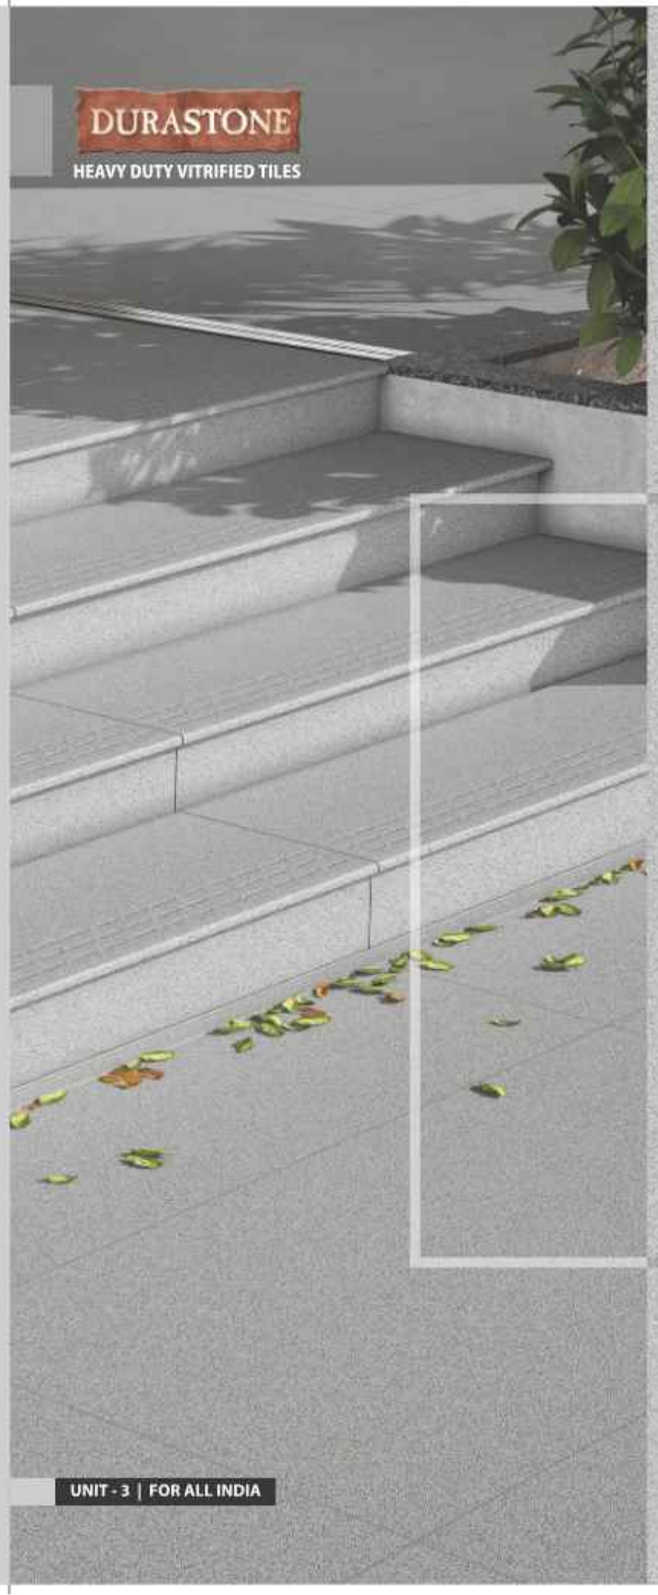


SOMANY

STEPS
RISER

# FULL BODY VITRIFIED
## TILES COLLECTION

600x1200mm | 300x1200mm
200x1200mm


STEPS RISER

# Revolutionary tiles for the **STEPS RISERS...**

The Somany R&D team has introduced an innovative and functional product designed for stairways: Steps Riser Tiles. This versatile addition is offered in a diverse selection of trendy designs, seamlessly blending with and enhancing your surroundings.






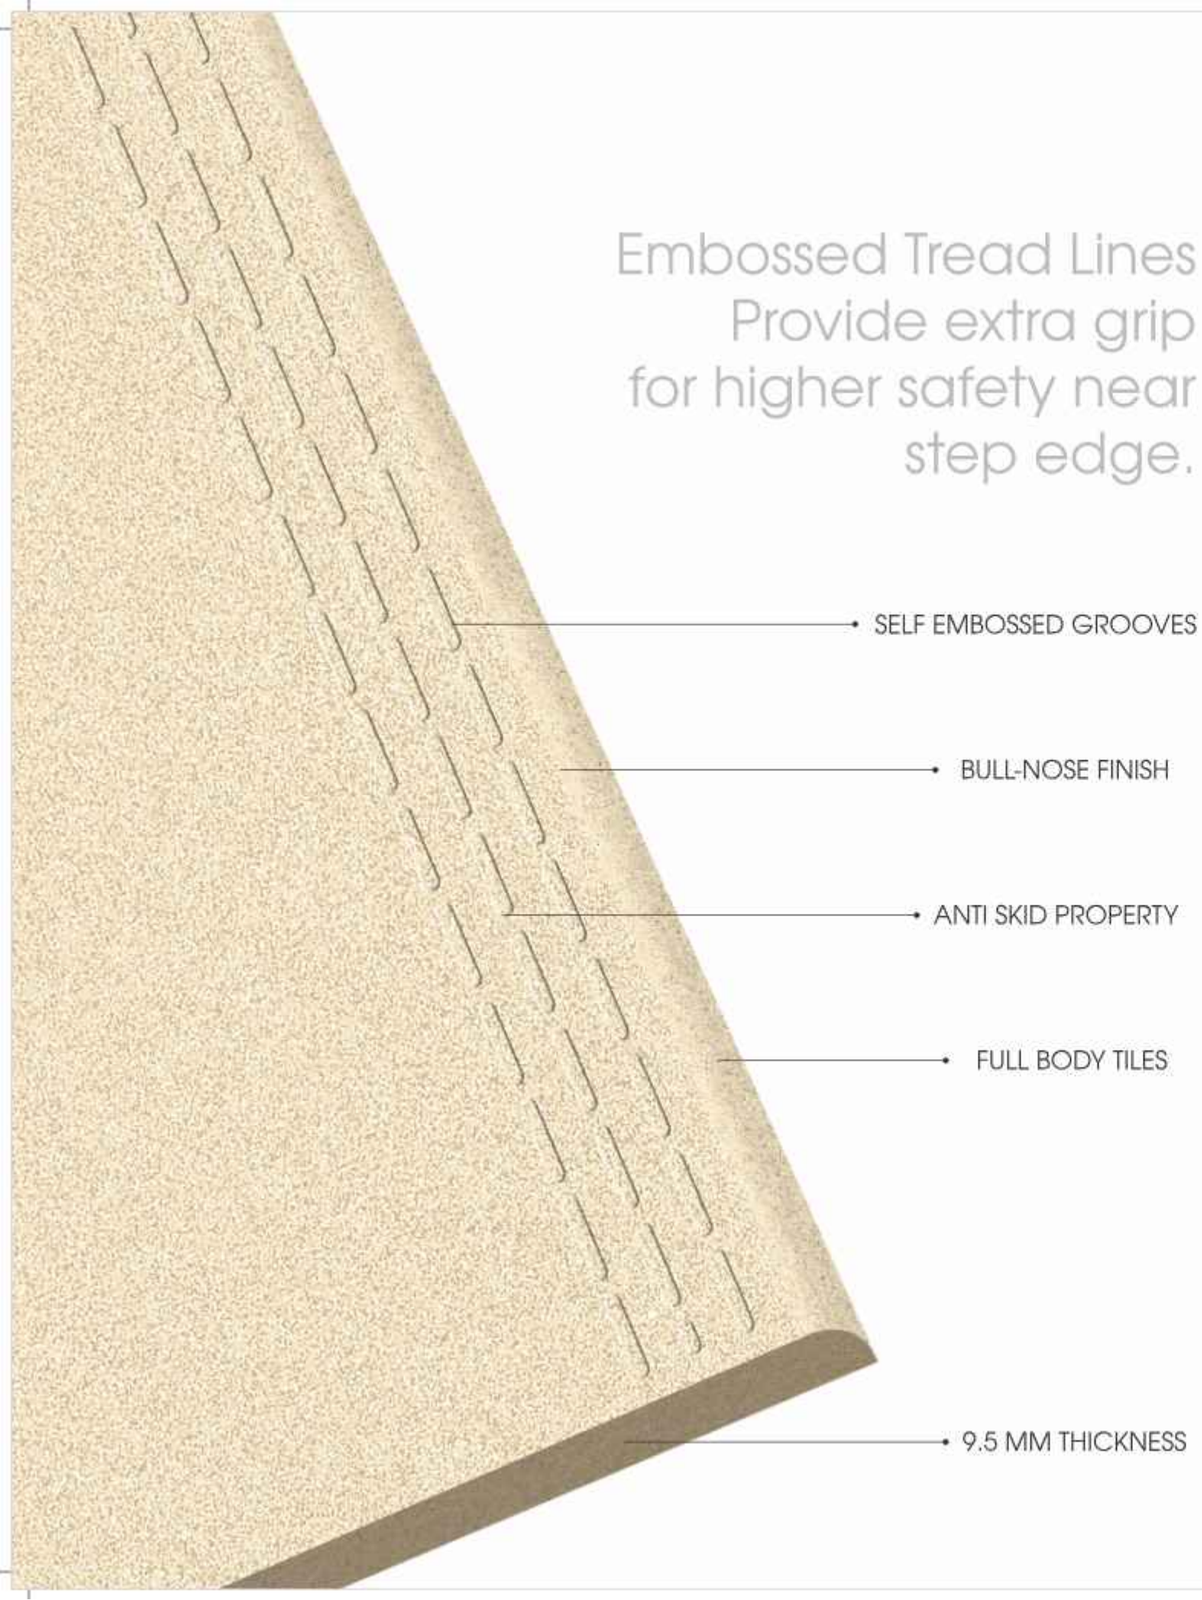


DURASTONE
HEAVY DUTY VITRIFIED TILES

Sizes Available



Steps 300 x 1200mm



Riser 200 x 1200mm



Landing area tile 600 x 1200mm


## Application Area

Highly durable, ideal for heavy traffic
and commercial areas, Indoor & Outdoor.




AND MANY MORE...



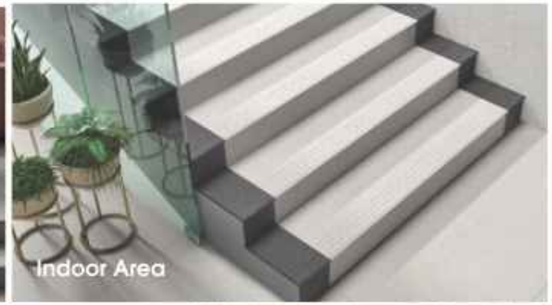





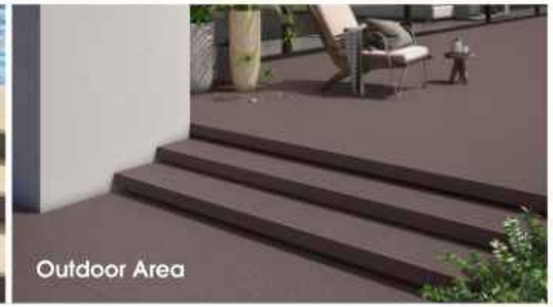

FULL BODY HOMOGENEOUS VITRIFIED TILES FOR STAIRS

UNIQUE ANTI-SKID SURFACE FINISH

UNGLAZE - NO SURFACE TREATMENT

PERFECT FOR INDOOR AND OUTDOOR

DURASTONE

HEAVY DUTY VITRIFIED TILES

## Aesthetic Beauty

5 beautiful shades to elevate
the aesthetic beauty of the entire space
whether it is interior or exterior.

### Bianco

300x1200mm
200x1200mm



### Crema

300x1200mm
200x1200mm



### Nero

300x1200mm
200x1200mm




### Maroon

300x1200mm
200x1200mm



### Gris

300x1200mm
200x1200mm

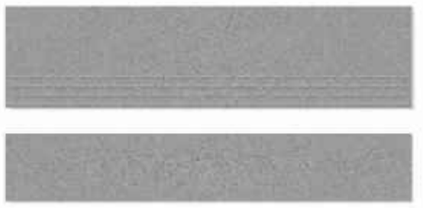








Tiles Shown: GRANDSTONE BIANCO, STEPON BIANCO, RISER BIANCO, STEPON NERO & RISER NERO

STEPS RISER | FULL BODY VITRIFIED TILES

600x1200mm
300x1200mm
200x1200mm

DURASTONE
HEAVY DUTY VITRIFIED TILES



GRANDSTONE BIANCO 600x1200mm




STEPON BIANCO 300x1200mm



RISER BIANCO 200x1200mm



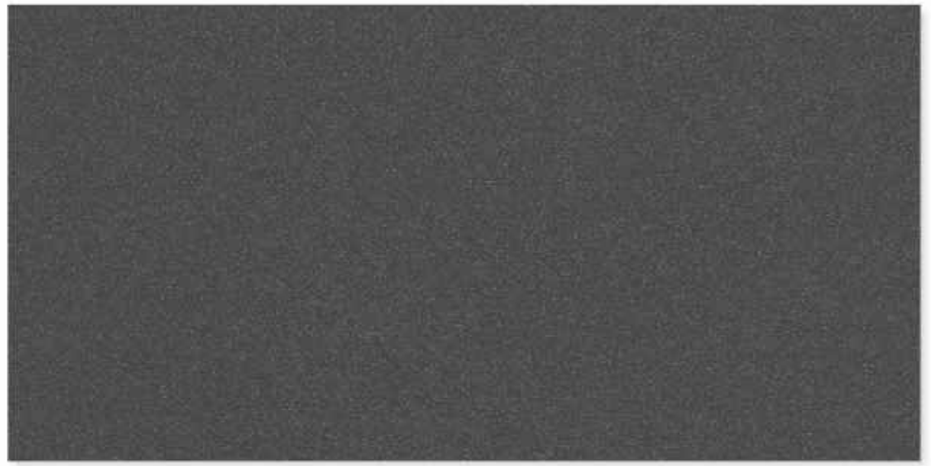

GRANDSTONE NERO 600x1200mm



STEPON NERO 300x1200mm



RISER NERO 200x1200mm







GRANDSTONE GRIS, STEPON GRIS & RISER GRIS


STEPS RISER | FULL BODY VITRIFIED TILES

600x1200mm
300x1200mm
200x1200mm

DURASTONE
HEAVY DUTY VITRIFIED TILES

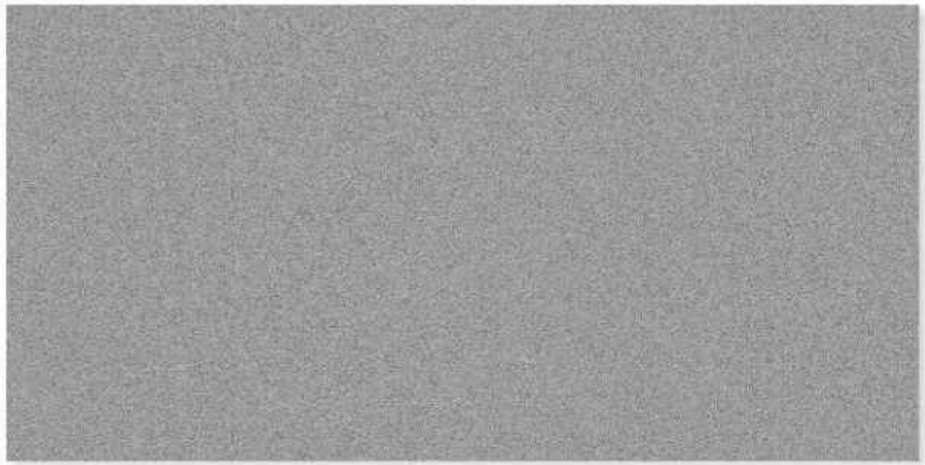

GRANDSTONE GRIS 600x1200mm

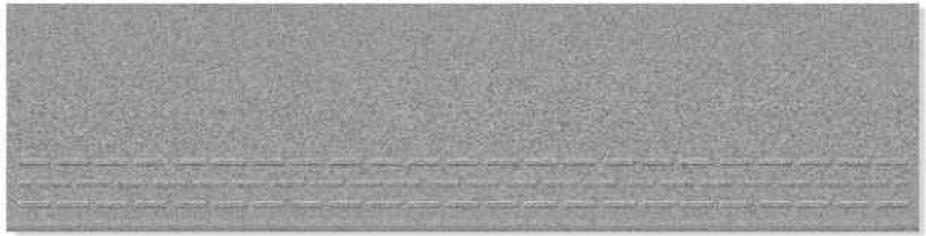


STEPON GRIS 300x1200mm



RISER GRIS 200x1200mm



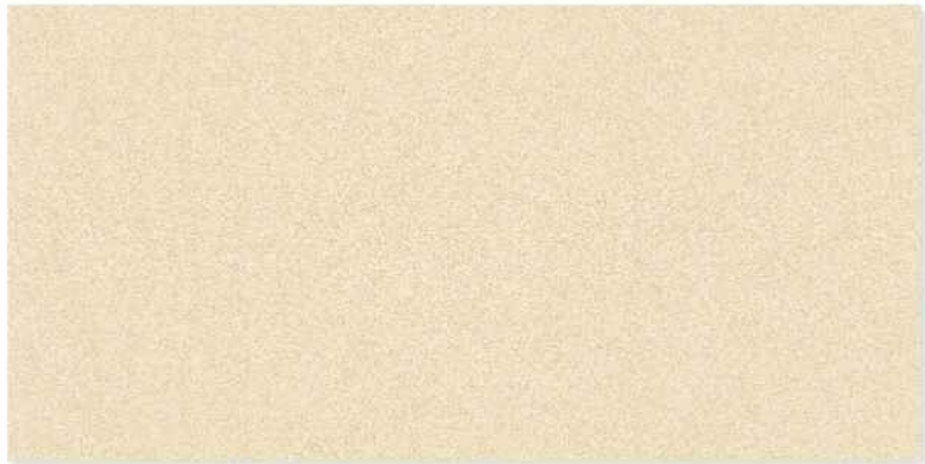

GRANDSTONE CREMA 600x1200mm



STEPON CREMA 300x1200mm




RISER CREMA 200x1200mm




GRANDSTONE MAROON, RISER MAROON, GRANDSTONE CREMA, STEPON CREMA & RISER CREMA

STEPS RISER | FULL BODY VITRIFIED TILES

600x1200mm
300x1200mm
200x1200mm

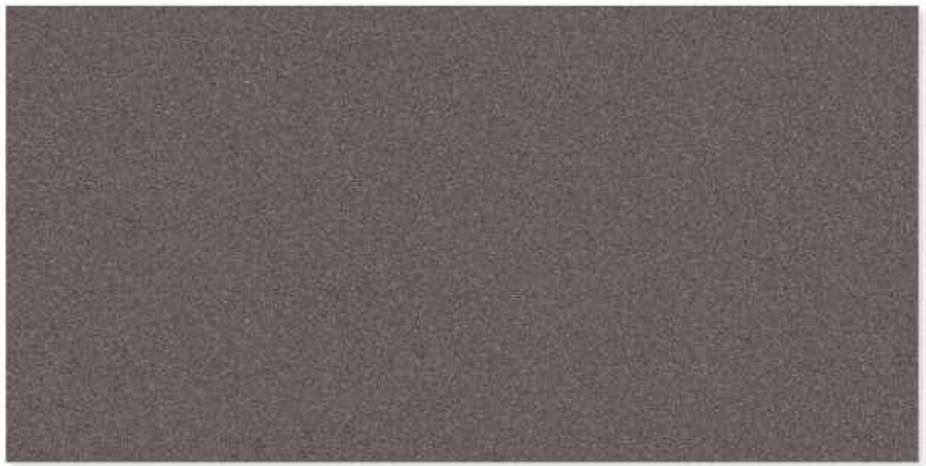

GRANDSTONE MAROON 600x1200mm




STEPON MAROON 300x1200mm



RISER MAROON 200x1200mm



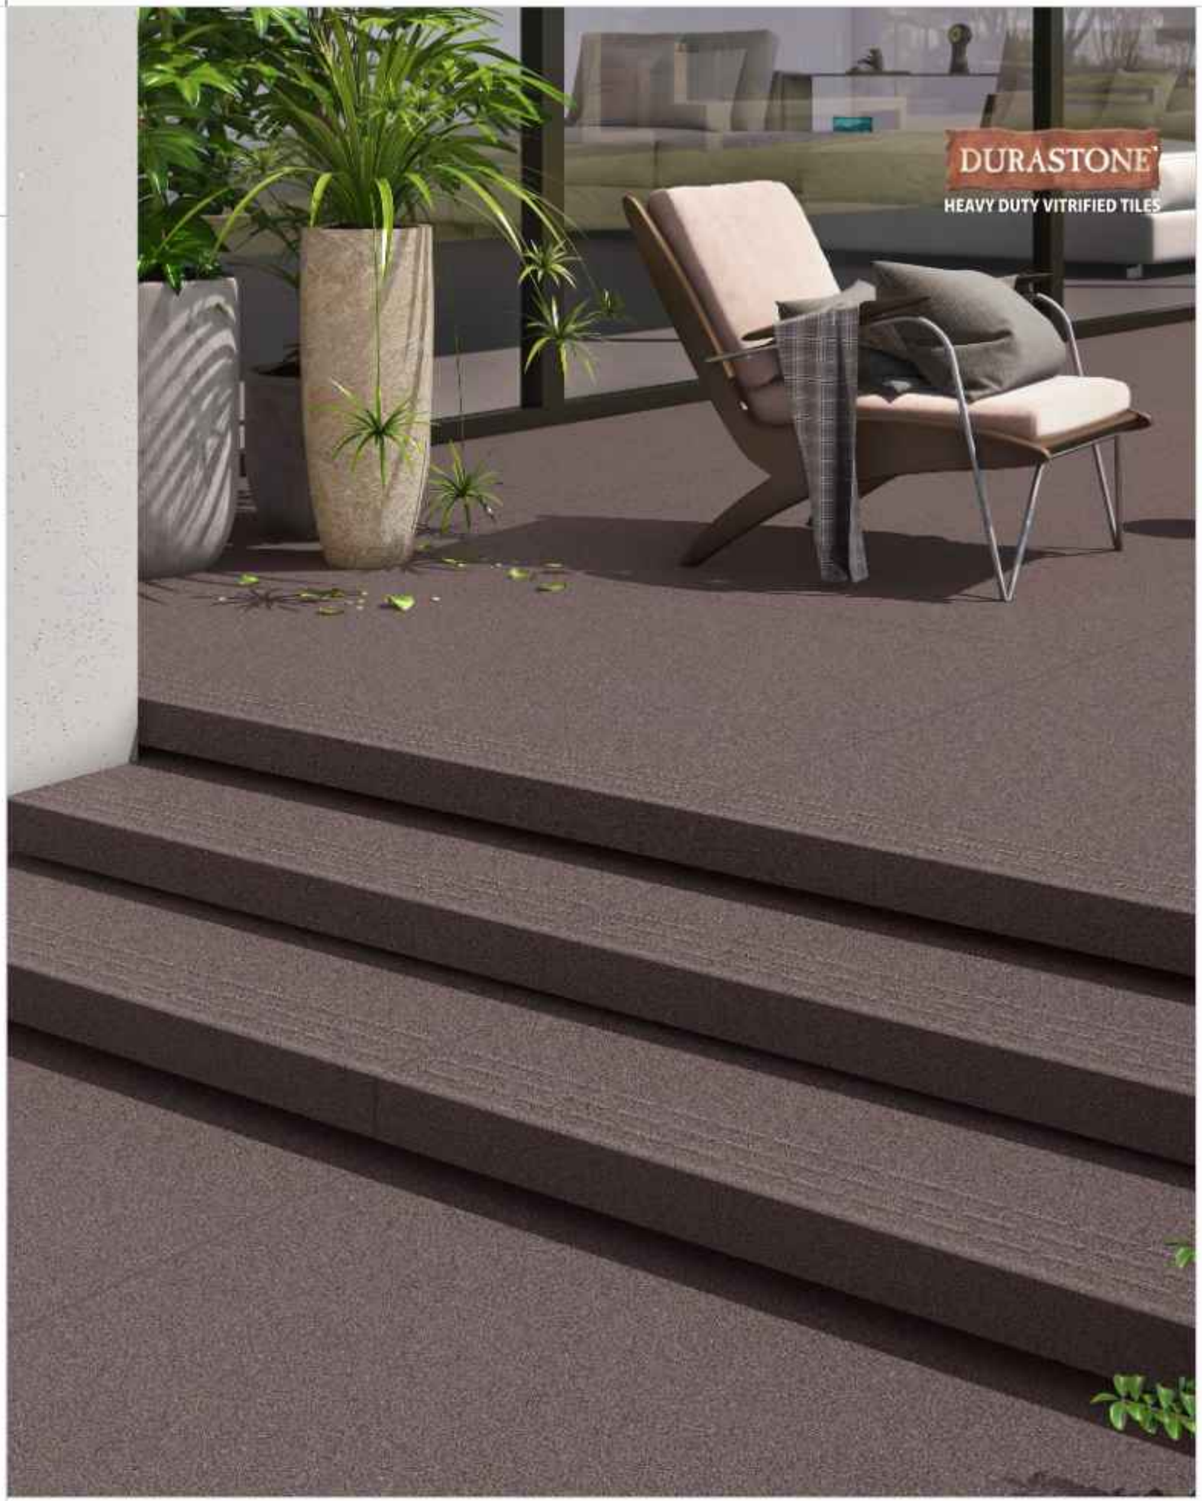


GRANDSTONE MAROON, STEPON MAROON & RISER MAROON

STEPS RISER

| PACKING DETAIL FOR STEPON TILES | | | | |
|---|---|---|---|---|
| Nominal Size | Thickness(mm) | Average weight per carton (Kgs) | No. of tiles per carton | Coverage area per carton |
| 600X1200 (Stone XL / Largo Series) | 9.5 | 30.0 | 2 | 1.44sq.mtr./15.50sq.ft. |
| 300X1200 (Step) | 9.5 | 29.2 | 4 | 1.44sq.mtr./15.50sq.ft. |
| 200X1200 (Riser) | 9.5 | 20.0 | 4 | 0.96sq.mtr./10.33sq.ft. |


| TECHNICAL SPECIFICATION FOR STEPON TILES | | | | |
|---|---|---|---|---|
| Characteristics | Requirement as per ISO 13006:2018 ± 0.5% Group BIa | Requirement as per IS 4457:2007 (Reaffirmed-2012) ± 0.5% | Our Values | Test Method |
| A) Dimension & Surface Quality | | | | |
| i) Length & Width | ± 0.3% | ± 0.5% | ± 0.10% | ISO 10545-Part 2 / IS 4457 Annex B |
| ii) Thickness | ± 5.0% | ± 5.0% | ± 4.0% | |
| iii) Straightness of Side | ± 0.30% | ± 0.20% | ± 0.10% | |
| iv) Rectengularity | ± 0.30% | ± 0.20% | ± 0.10% | |
| v) Surface Flatness | | | | |
| a) Center curvature ( max.Deviation) | ± 0.40% | ± 0.30% | ± 0.2 % | |
| b) Edge curvature ( max.Deviation) | ± 0.40% | ± 0.30% | ± 0.2 % | |
| c) Corner warpage ( max.Deviation) | ± 0.40% | ± 0.30% | ± 0.2 % | |
| vi) Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| B) Physical Properties | | | | |
| i) Water Absorption | Avg. 0.5 %, Individual 0.6% max | Avg. 0.5 %, Individual 0.6% max | Avg. < 0.5 % | ISO 10545-Part 3/IS 4457 Annex C |
| ii) Modulus of Rupture [N/mm2] | Avg. 35, Individual 32 min | Avg. 35, Individual 32 min | Avg. > 35 | ISO 10545-Part 4/IS 4457 Annex D |
| iii) Breaking Strength in N | Min 1300 N | Min 1300 N | > 1500N | |
| iv) Moisture Expansion in mm/m | Test Method Available | Not Available | Max. 0.02 | ISO-10545-Part 10 |
| v) Scratch Hardness of surface (Moh's) | N/A | Not Available | Min. 6 | IS 13630 Part-13 |
| vi) Resistance to Deep Abrasion of un glazed tiles, removed volume in $mm^3$ | Max. 175 | Max. 175 | Max. 140 | ISO 10545-Part 7/IS 4457 Annex E |
| vii) Coefficient of linear thermal expansion from embiant temperature to 100° C | Test Method Available | Not Available | Max 6 X $10^{-6}$ $K^{-1}$ max | ISO 10545-Part 8 |
| viii) Thermal Shock Resistance | Required | Not Available | 10 cycle passed | ISO-10545-Part 9 |
| ix) Crazing Resistance | N/A | Not Available | 4 cycle passed | ISO-10545-Part 11 |
| x) Impact Resistance as Co-efficisnt of Restitution (COR) | Test Method Available | Not Available | Min 0.55 | ISO-10545-Part 5 |
| xi) Frost Resistance | Required | Not Available | 100 Cycle Passed | ISO-10545-Part 12 |
| C) Stain & Chemical Resistance | | | | |
| i) Stain Resistance | Min Class 3 | Not Available | Min Class 2 | ISO-10545-Part 14 |
| ii) Resistance to household chemicals | Minimum B | Test Method Available | Class UA | IS 10545-Part 13/IS 4457 Annex F |
| iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds) | Declared Value[1] | Test Method Available | Class ULA (Low Conc) Class UHA (High Conc) | |
| iv) Resistance to Concentrated $HNO_3$ & $H_2SO_4$ | Not Available | Loss of mass not excess 1.5% | Loss Less Than 1.5% | IS 4457 Annex G |

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed.
Complaints will not be entertained for Borders, Highlighters & Motifs.



# TILE VISUALISER

SOMANY

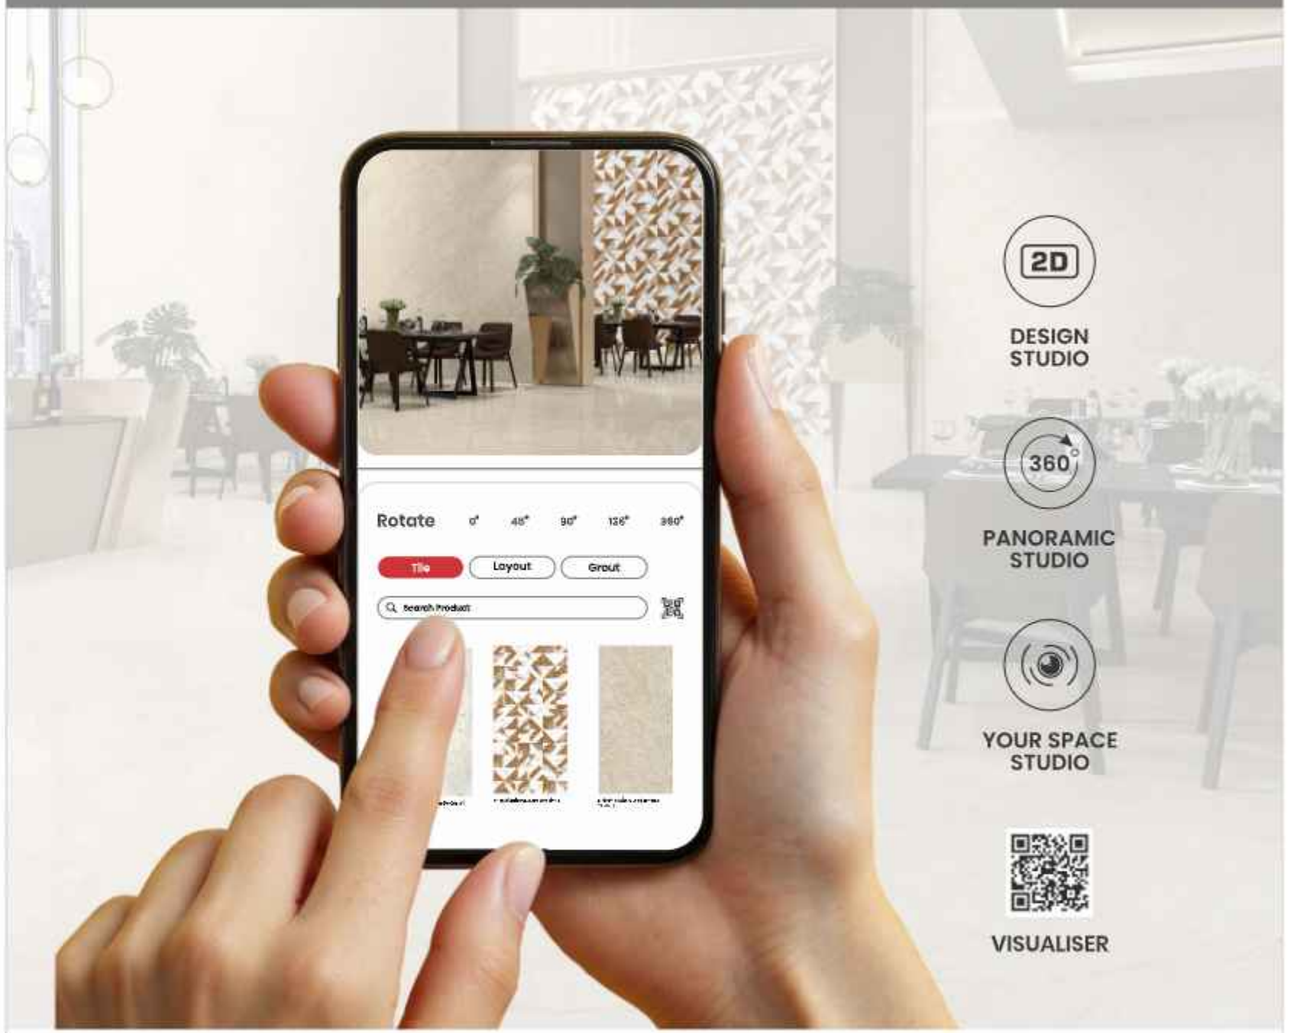


**Choosing the perfect tile for your dream home should be exciting, not overwhelming!** With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

**Your dream tile? Just a click away.**

Toll Free: 1800-103-0004 | www.somanyceramics.com

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner




## Lasting Bonds Made Ezy

**Behind Every Stunning Tile, there's a Stronger Bond!**
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamond Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorado Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com