SOMANY

**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**

DURASTONE / PAVESMART / CATALOGUE / SEPT 2026



UNIT 04 DURASTONE RANGE VOL 1 | SEPT 2026

# PAVESMART
collection

400 x 400mm


SOMANY

**DURASTONE**

# PAVESMART
## collection

Inspired by nature's elemental forces, Durastone Pavesmart captures the eternal soul of stone into surfaces that define outdoor living with enduring elegance. The collection honours authentic stone character through intricate textures, tonal variations, and refined patterns, standing as a testament to craftsmanship that channels raw, primal essence into versatile outdoor solutions. Available in 400x400mm size, Pavesmart offers designers limitless creative freedom with surfaces engineered to withstand the test of time. The Matt finish, punctuated with subtle textural accents, delivers understated sophistication while ensuring slip resistance and practicality. Crafted for the rigours of outdoor living, these tiles deliver exceptional durability against harsh weather, moisture, abrasion, and the demands of daily vehicular and pedestrian traffic. Even under prolonged UV exposure, remarkable chromatic stability keeps colours vibrant and unfaded, ideal for driveways, parking areas, pathways, courtyards, patios, and commercial outdoor zones where longevity and aesthetic integrity are paramount.



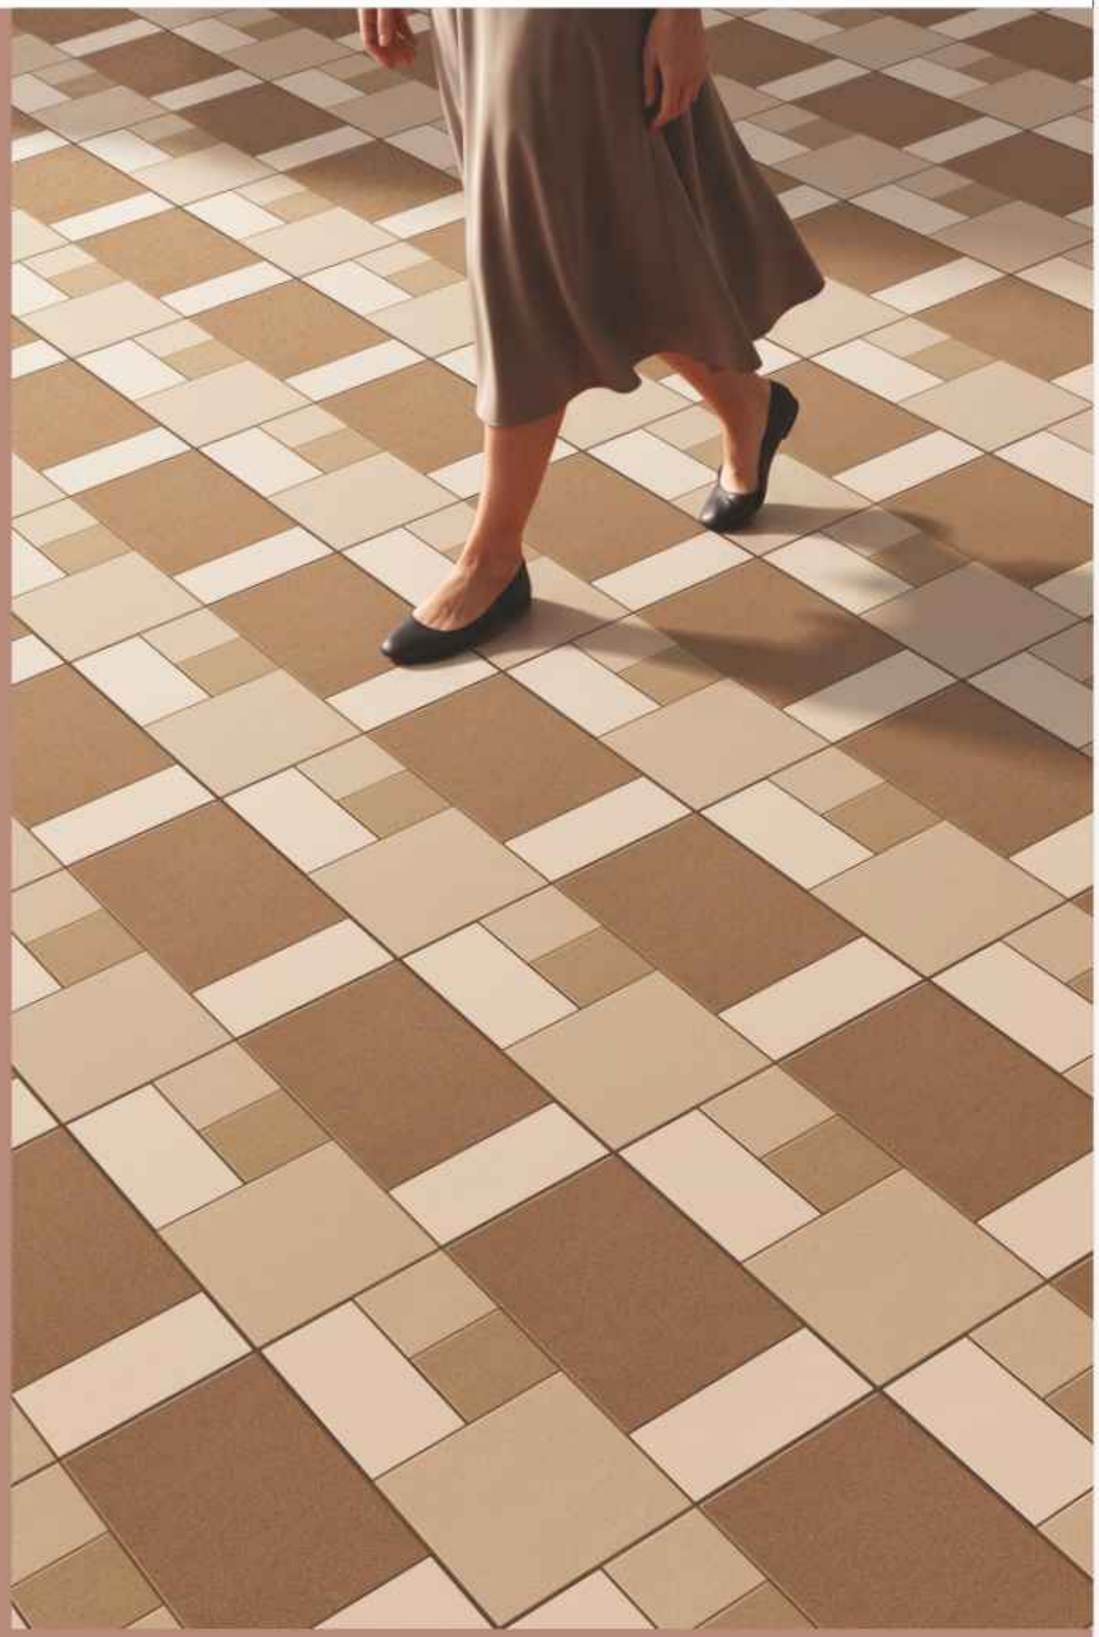

## Technical Features

- ANTI SKID
- HIGH FLEXURAL STRENGTH
- NON-REFLECTIVE
- ABRASION AND WEAR-RESISTANT
- EASY TO CLEAN
- ECO FRIENDLY
- FROST RESISTANT
- CHEMICAL RESISTANT
- TEMPERATURE RESISTANT

## Application Areas

- Driveways & Pathways
- Pool Deck Areas
- High-Traffic Industrial Zones
- Public Parks & Gardens
- Terraces & Balconies
- Parking Areas
- Healthcare & Pharmaceutical Facilities
- Automobile Zones




FLOOR: **PAVE AISHA BROWN** SIZE: 400x400mm SURFACE: MATT








PAVE AISHA BROWN
V2

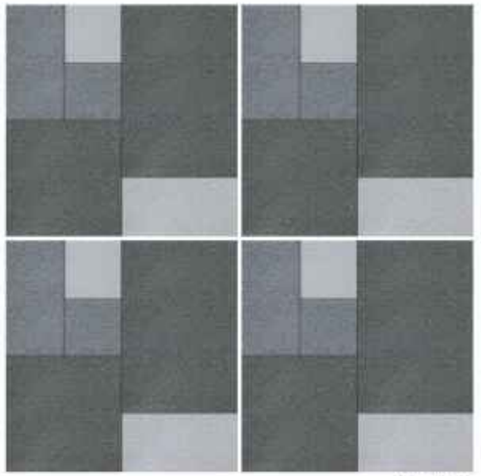

PAVE ALCAMO GREY
V1

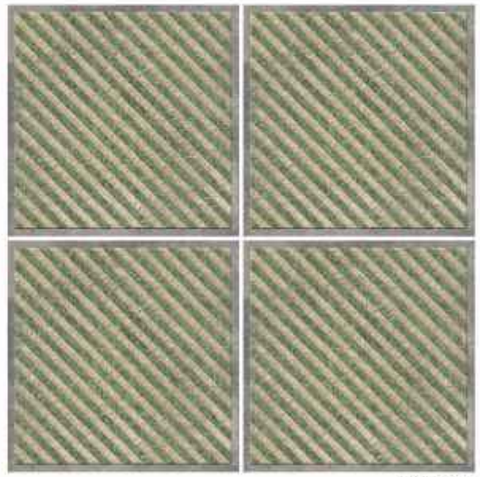

PAVE ALESSO GREEN
V1



PAVE ALVA GREY
V4

400x400mm
12mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid




PAVE AURUM BEIGE

VI



PAVE AURUM GREY

VI

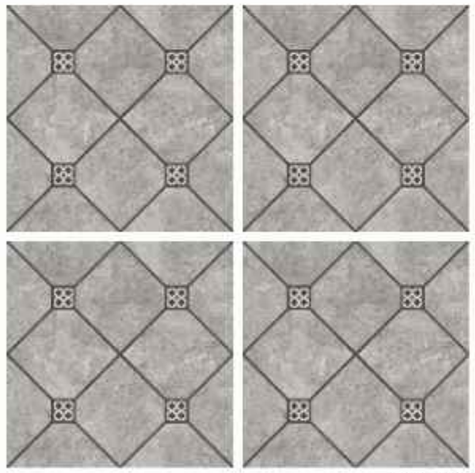

PAVE ASHER GREY

VI

400x400mm
12mm Thickness

A minimum 5mm
spacer is recommended


Anti
Skid





PAVE BOLSENA BEIGE

VI

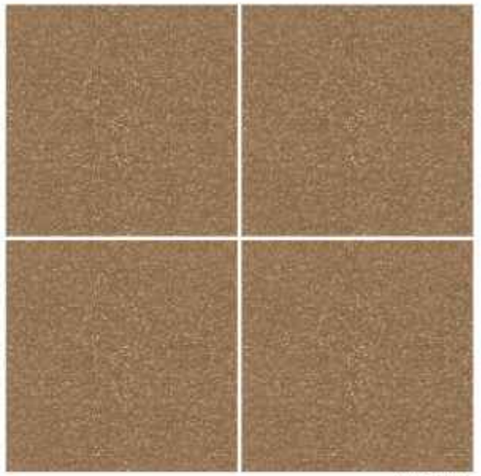


PAVE BOLSENA BROWN

VI



PAVE BOLSENA LIGHT GREY

VI

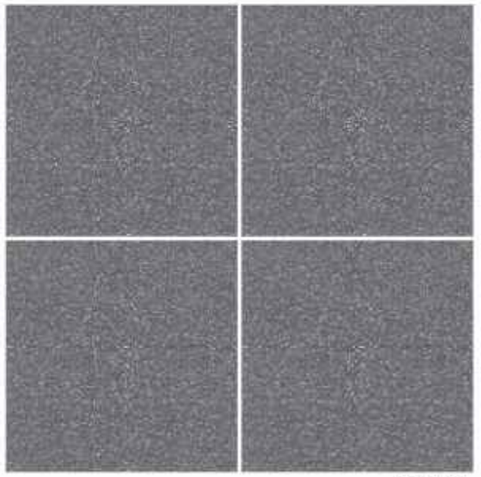

PAVE BOLSENA NERO

VI



PAVE COLLEN BROWN

V1




PAVE COLLEN GREY

V1



PAVE COUNTY BROWN

V1

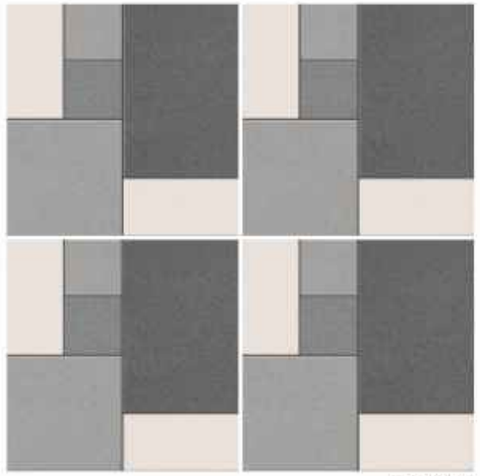

PAVE COUNTY GREY

V1

400x400mm
12mm Thickness

A minimum 5mm spacer is recommended

Anti Skid





PAVE DARIS GREY

V4



PAVE DARIS MUSHROOM

V4



PAVE DARIS RUST

V4



PAVE ELVINA NATURAL

V4



FLOOR: **PAVE DARIS GREY** SIZE: 400x400mm SURFACE: MATT







PAVE ELIA BLUE

V1



ELIA ELIA BROWN

V1



PAVE GIVON GREY

V1

400x400mm
12mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid




PAVE HARON BIANCO

VI



PAVE HARON NERO

VI

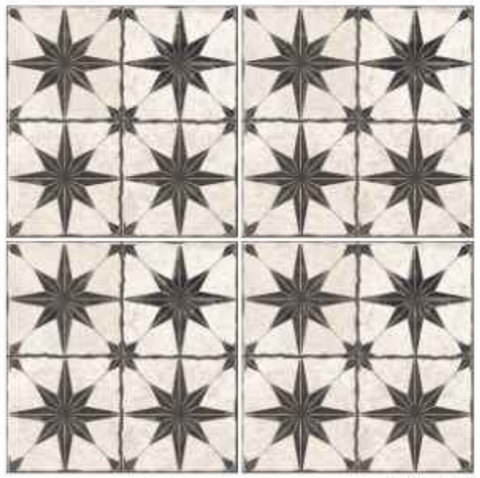

PAVE HARON DECOR

VI


400x400mm
12mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid






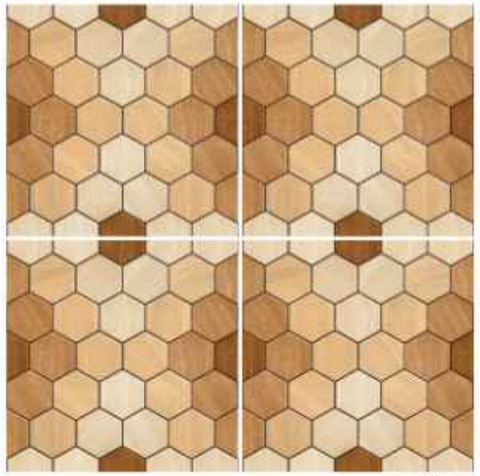


PAVE HEXA BRUNO

VI

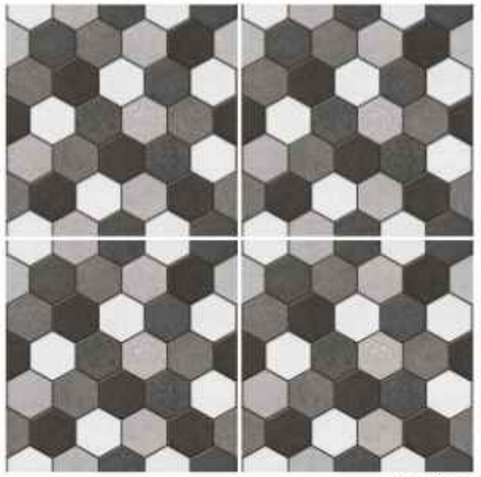


PAVE HEXA GREY

VI

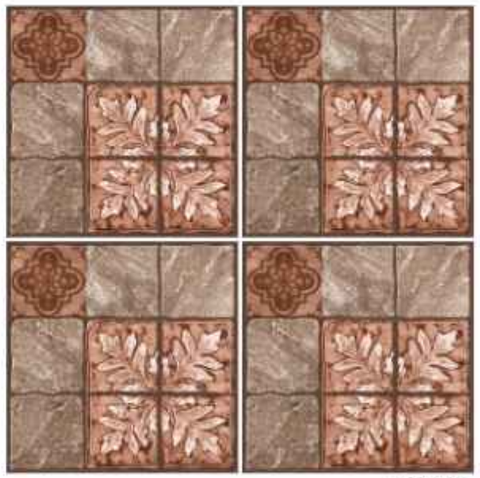

PAVE KANDLA BROWN

VI

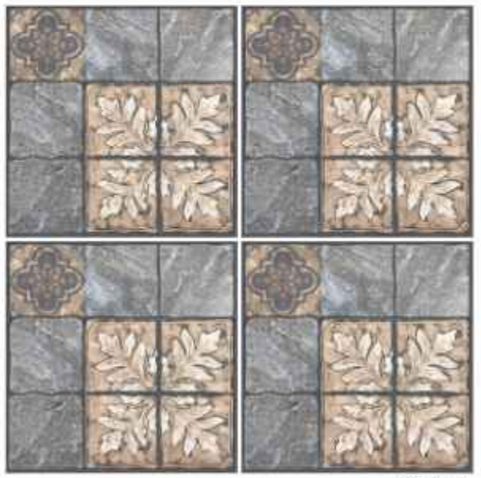

PAVE KANDLA GREY

VI



FLOOR: **PAVE MAKU GREEN** SIZE: 400x400mm SURFACE: MATT









PAVE IVAN BROWN

VI

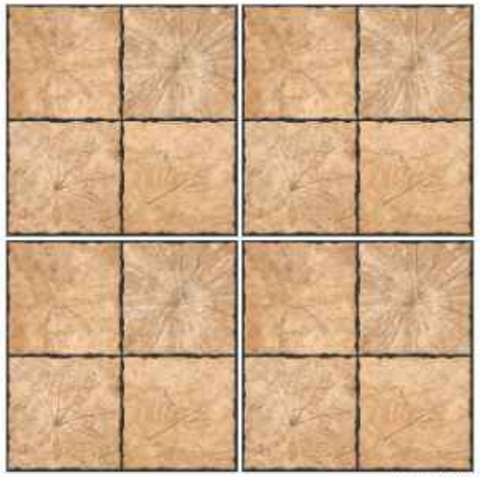

PAVE MILES BROWN

VI

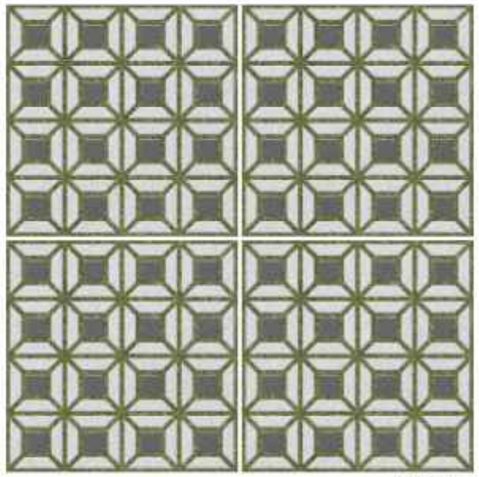

PAVE MAKU GREEN

V1

400x400mm
12mm Thickness


A minimum 5mm
spacer is recommended

Anti
Skid



PAVE MORLINA BEIGE

VI

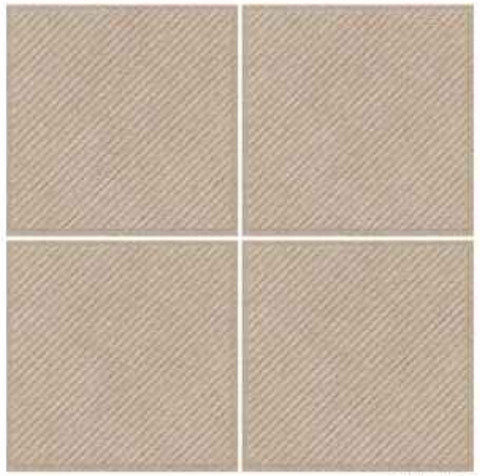

PAVE MORLINA BROWN

VI



PAVE MORLINA BROWN DECO

VI


400x400mm
12mm Thickness

A minimum 5mm
spacer is recommended

Anti
Skid






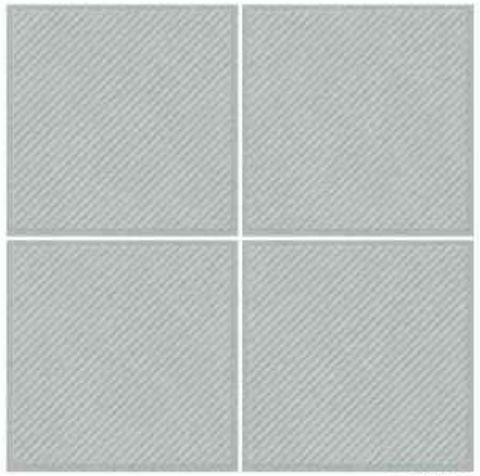


PAVE MORLINA GREY

VI

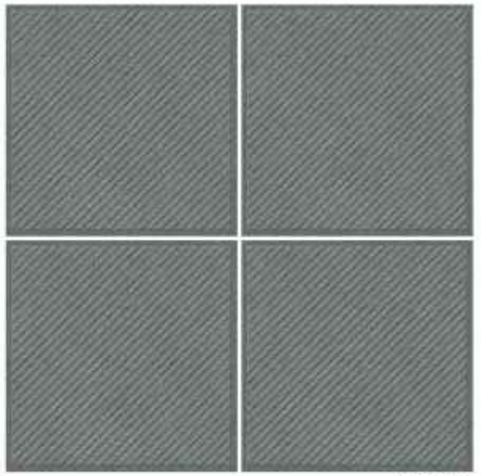


PAVE MORLINA NERO

VI

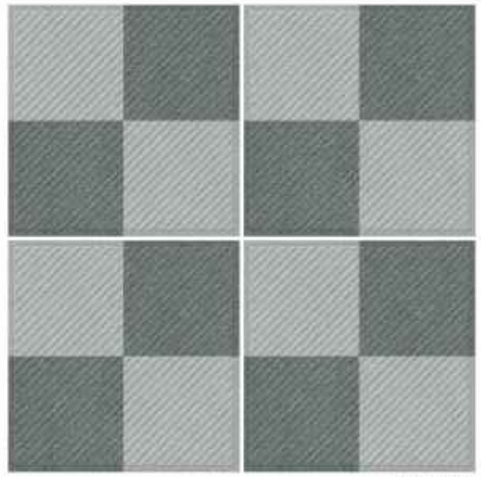


PAVE MORLINA NERO DECO

VI

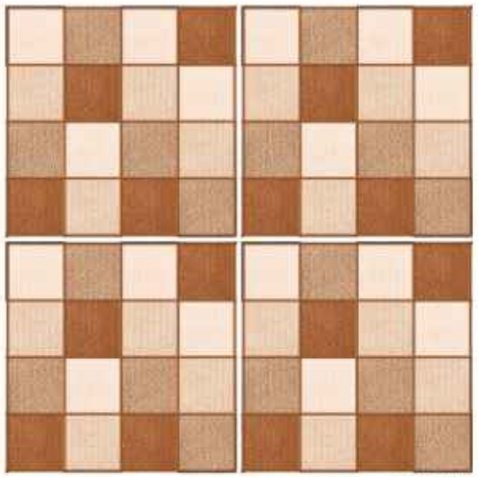


PAVE PEZZATTO BEIGE

VI

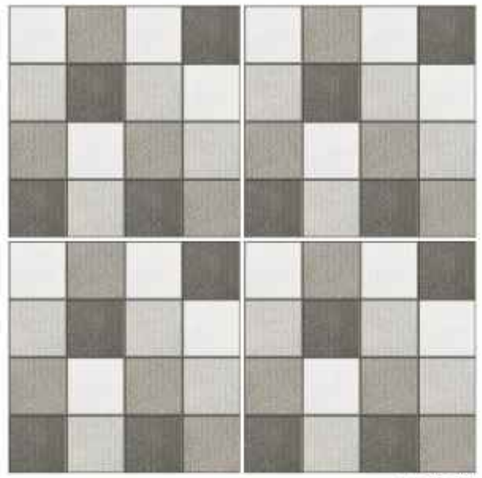


PAVE PEZZATTO GREY

VI

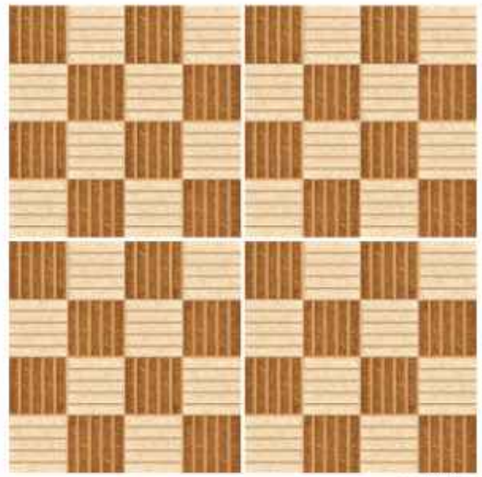

PAVE SAVOY BROWN

VI

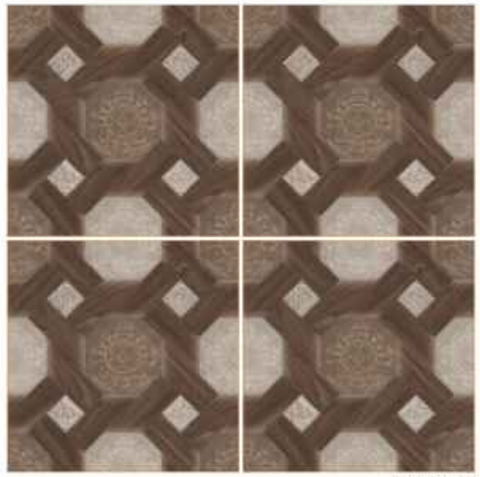

PAVE RUSTWOOD CHOCO

VI



PAVE TRAVOS GREY

VI

400x400mm
12mm Thickness


A minimum 5mm
spacer is recommended

Anti
Skid

## DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

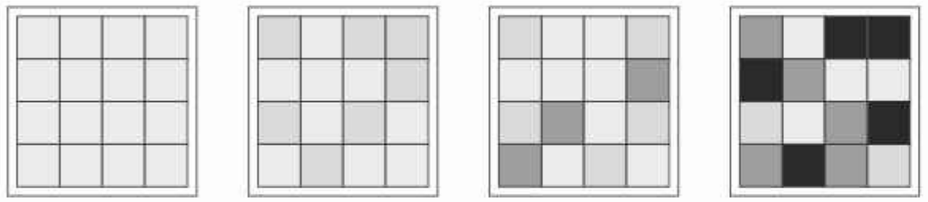

**V1** Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation



| PACKAGING DETAIL FOR PAVESMART COLLECTION | | | | |
|---|---|---|---|---|
| Nominal Size (mm) | Thickness (mm) | Avg. Wt. Per Carton (Kg.) | No. of Tiles Per Carton | Coverage Area Per Carton |
| 400x400mm | 12mm | 20 kg | 5 | 0.80 Sq. mtr / 8.61 Sq. ft. |

| TECHNICAL SPECIFICATION FOR PAVESMART COLLECTION | | | | |
|---|---|---|---|---|
| Characteristics | Requirement as per ISO 13006:2018 0.5% ≤ 3.0% Group B I b | Requirement as per IS 15622:2017 0.08 ≤ E ≤ 3.0 Group BIb | Our Value | Test Method |
| (A) Dimension & Surface Quality | | | | IS 13630 Part 1 / ISO 10545-2 |
| i) Length & Width | ± 0.30% | ±0.10% | ±0.10% | |
| ii) Thickness | ± 5.0% | ± 5.00% | ± 4.0% | |
| iii) Straightness of Side | ± 0.30% | ±0.10% | ± 0.10% | |
| iv) Rectangularity | ± 0.30% | ±0.10% | ± 0.10% | |
| v) Surface Flatness | | | | |
| a) Center Curvature (%) (Max. Deviation) | ± 0.40 % | ± 0.50 % | ±0.2% | |
| b) Edge Curvature (%) (Max. Deviation) | ± 0.40 % | ± 0.50 % | ±0.2% | |
| c) Corner Warpage (%) (Max. Deviation) | ± 0.40 % | ± 0.50 % | ±0.2% | |
| vi) Surface Quality | 95 % of tiles will be free from visible defects | 95 % of tiles will be free from visible defects | 95 % of tiles will be free from visible defects | |
| B) Physical Properties | | | | |
| i) Water Absorption | 0.5 % < Ev ≤ 3.0 % Individual 3.3% Max | Avg. 0.08 ≤ E ≤ 3.0 | Avg. < 3.0 % | IS 13630 Part 2 / ISO 10545-3 |
| ii) Modulus of Rupture (N/mm2) | Avg. 30, Individual 27 Min | Avg. 30, Individual 27 Min | Avg. > 30 | IS 13630 Part 6 / ISO 10545-4 |
| iii) Breaking Strength in N | 1100 N | 1100 N | Min. 1100 N | |
| iv) Moisture Expansion in mm/m | Test Method Available | 0.02 Max. | 0.02 Max. | IS 13630 Part 3 / ISO-10545-10 |
| v) Scratch Hardness of Surface (Mohs) | N/A | Min 5 | Min 6 | IS 13630 Part 13 |
| vi) Resistant to Surface Abrasion of Glazed Tiles | Min Class II | Min II | Gr IV | IS 13630 Part 11 / ISO 10545-7 |
| vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C | Test Method Available | 7X $10^{-6}K^{-1}$ Max | 6X $10^{-6}$ $K^{-1}$ Max | IS 13630 Part 4 / ISO 10545-8 |
| viii) Thermal Resistant | Required | Min 10 Cycle Min Passed | 10 Cycle Passed | IS 13630 Part 5 / ISO-10545-9 |
| ix) Crazing Resistant | N/A | 4 Cycle @ 7.5 Bar Min | 4 Cycle Passed | IS 13630 Part 9 / ISO 10545-11 |
| x) Impact Resistant as Coefficient of Restitution (COR) | Test Method Available | 0.55 Min | 0.55 Min. | IS 13630 Part 14/ISO 10545-5 |
| xi) Frost Resistant | Required | Required if Agreed | 100 Cycle Passed | IS 13630 Part 10 / ISO-10545-12 |
| C) Chemical Resistant (Glazed Tiles) | | | | |
| i) Stain Resistant | Min. Class 3 | Min Class 1 | Min Class 2 | IS 13630 Part 8 / ISO 10545-14 |
| ii) Resistant to Household Chemicals | Min. Class B | Required If Agreed | Min Class AA | IS 13630 Part 8 / ISO 10545-14 |
| iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds) | Declared Value[1] | Required If Agreed | Min Class A | |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE



# TILE VISUALISER

SOMANY




**Choosing the perfect tile for your dream home should be exciting, not overwhelming!** With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

**Your dream tile? Just a click away.**

Toll Free: 1800-103-0004 | www.somanyceramics.com

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner




## Lasting Bonds Made Ezy

**Behind Every Stunning Tile, there's a Stronger Bond!**
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

# SOMANY Bathware

# SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Gala Paper Holder Chrome | Tiles used : Wall & Floor Area : Lumiere Bugio 300 Engravo MT | Shower Area : Colorado Bianco 300 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com