SOMANY

**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**

PORTO / CAT / AUGUST 2025



UNIT 06 UNIT 08 COVER9ine RANGE VOL 2 | AUG 2025

# PORTO
collection

1200 x 1800mm
600 x 1200mm

SOMANY



# Unravelling the Beauty of Organic Design

PORTO
collection

# Design Through The Ages

In a world where nature's artistry unfolds in layers, Porto's matted elegance stands as a testament to the raw beauty of natural stone. Its enduring strength reflects a material that has withstood geological eras, seamlessly retaining its charisma in contemporary design. As you gaze upon its surface, a rich palette of earthy tones captivates your senses. Deep slate hues mingle with warmer shades, accented by subtle flecks that reveal the intricate artistry of natural formation. Yet, its tactile velvety softness, with low-sheen is inviting while diffusing light in a soft, understated way, elevating the architectural nuances of any space. The surface, though strong and resilient, offers a tactile experience that feels comforting to the touch. This unique blend of strength and softness ensures not just visual appeal, but a surface that engages the senses, offering both beauty and practicality in equal measure.





# 1 Design 5 Shades 1 Punch

Sizes: **1200x1800mm** I **600x1200mm** I Thickness: **9mm** I Design: **1** I Shades: **5** I Punch: **1**




POWERED BY

QUILLTOUCH surface

Quilltouch surface offers a velvety, non-reflective matt finish (Reflective Gloss Index <8) with exceptional softness and clarity. Engineered for durability, it provides PEI-4 abrasion resistance, making them ideal for high-traffic areas. Their design clarity ensures sharp detail even in dark shades, blending elegance, resilience, and precision for versatile residential and commercial use.

## TECHNICAL FEATURES




**MOH'S SCALE HARDNESS >6**

High density sintering for a robust surface which is a crucial factor to consider when choosing tiles, especially for high-traffic & high-stress areas.




**ABRASION RESISTANT PEI-V**

Our tiles are designed to withstand the test of time, even in high-traffic areas. Their superior abrasion resistance ensures durability and maintains their pristine appearance for years.




**SLIP RESISTANT R 9**

R 9 slip resistant tiles are a great choice for areas that may get wet. They offer a good balance of slip resistance and aesthetics, making them suitable for both residential and commercial settings.




**REFLECTIVE GLOSS INDEX <8**

Our tiles feature a subtle, low-reflection finish, reducing glare and creating a more comfortable visual experience. This makes them ideal for various settings, including spaces with significant natural light.

## APPLICATION AREAS

Residential Areas · Commercial Areas · Hospitals · Shops and Malls · Hotels and Restaurants · Schools and Colleges · Outdoor Furniture · Public Places





1200x1800mm



600x1200mm



600x1200mm
Punch (SASSO)

## AVAILABLE SHADES

Punch (SASSO)



| Sizes | Surface | Thickness | Variation |
|---|---|---|---|
| 1200x1800mm | Quilltouch | 9 | V4 |
| 600x1200mm | Quilltouch | 9 | V4 |
| 600x1200mm - Punch (SASSO) | Quilltouch | 9 | V4 |

# PORTO


PORTO MARRONE

1

Punch (SASSO)

PORTO AVORIO

2

PORTO AVENA

3

PORTO SLATE

4

PORTO GRIGE

5

## PORTO MARRONE

PORTO MARRONE 180 QUILL
GRANDE PORTO MARRONE QUILL
GRANDE PORTO MARRONE SASSO QUILL






## *Embrace the Enduring Charm of Earth*



WALL: **GRANDE PORTO MARRONE SASSO QUILL** | SIZE: **600X1200MM** | SURFACE: **QUILLTOUCH** | PUNCH: **SASSO**
FLOOR: **PORTO MARRONE 180 QUILL** | SIZE: **1200X1800MM** | SURFACE: **QUILLTOUCH**
TABLE: **NECTAR CREMA OPACO** | SIZE: **75X300MM** | SURFACE: **RANDOM PUNCH (MATT)**











PORTO AVORIO

**PORTO AVORIO 180 QUILL**
**GRANDE PORTO AVORIO QUILL**
**GRANDE PORTO AVORIO SASSO QUILL**






*A Radiant*
*Echo of Light*



WALL: **GRANDE PORTO AVORIO SASSO QUILL** | SIZE: **600X1200MM** | SURFACE: **QUILLTOUCH** | PUNCH: **SASSO**
FLOOR: **PORTO AVORIO 180 QUILL** | SIZE: **1200X1800MM** | SURFACE: **QUILLTOUCH**
HIGHLIGHTER WALL: **STRIO VALOR MODERNA WOOD WENGE** | SIZE: **200X1200MM** | SURFACE: **MATT**









PORTO AVENA

**PORTO AVENA 180 QUILL**
**GRANDE PORTO AVENA QUILL**
**GRANDE PORTO AVENA SASSO QUILL**






*The Essence*
*of Serenity*

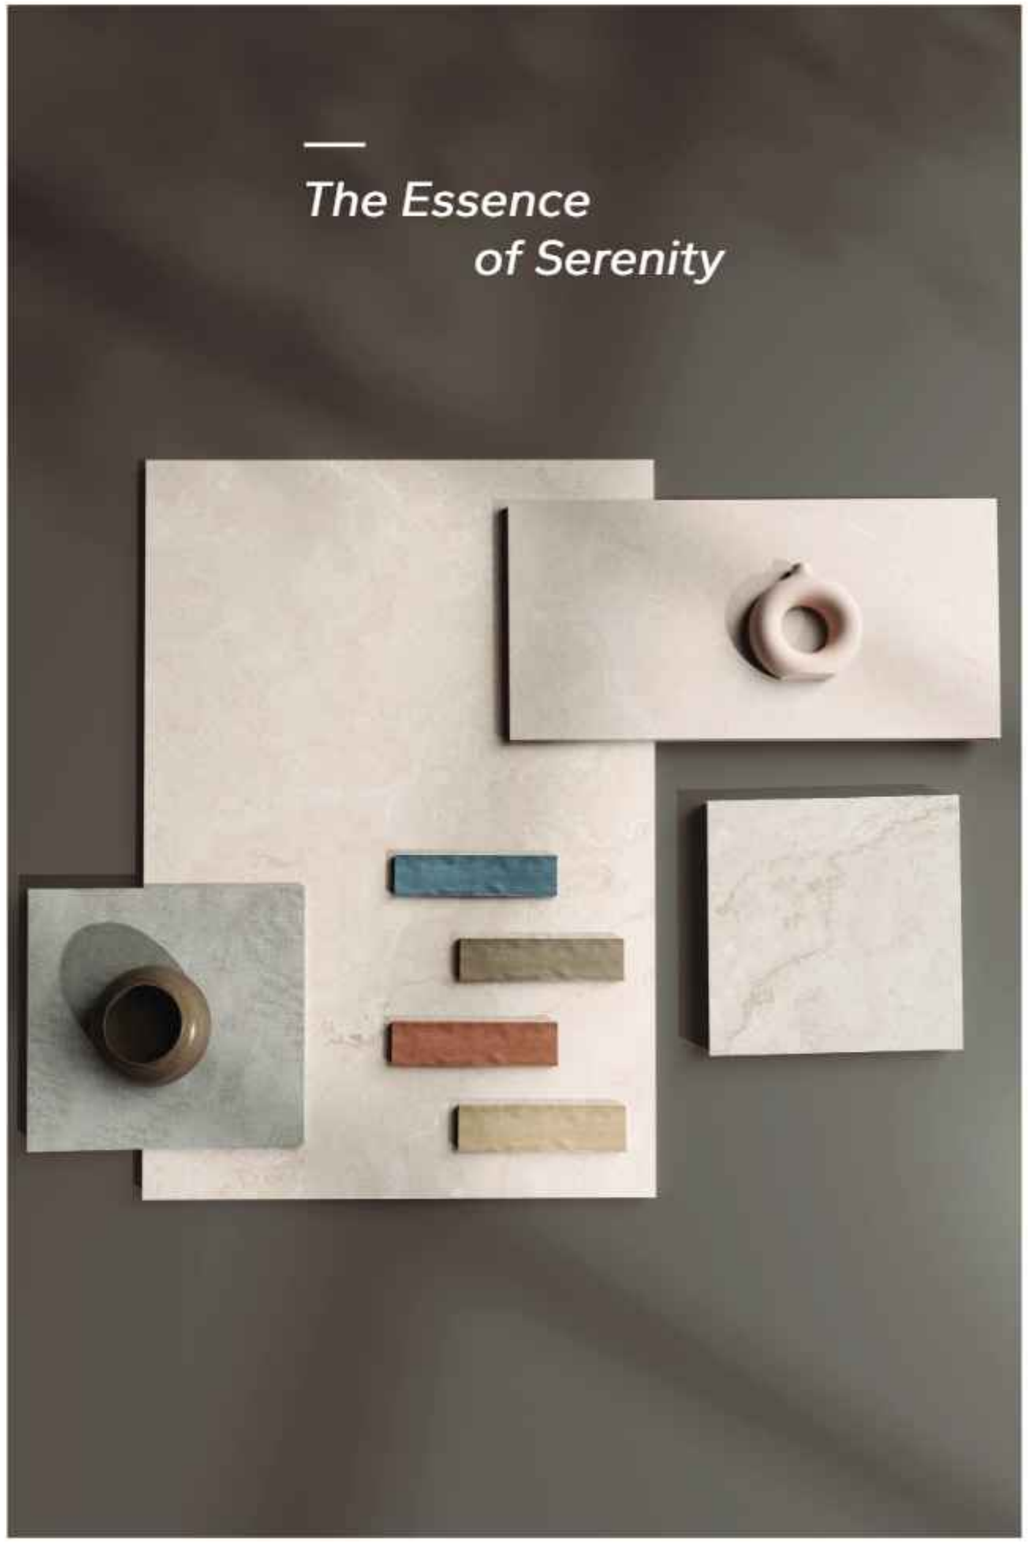

WALL: **GRANDE PORTO AVENA SASSO QUILL** | SIZE: **600X1200MM** | SURFACE: **QUILLTOUCH** | PUNCH: **SASSO**
FLOOR: **PORTO AVENA 180 QUILL** | SIZE: **1200X1800MM** | SURFACE: **QUILLTOUCH**
WALL: **GRANDE PORTO AVENA QUILL** | SIZE: **600X1200MM** | SURFACE: **QUILLTOUCH**









PORTO SLATE

**PORTO SLATE 180 QUILL**
**GRANDE PORTO SLATE QUILL**
**GRANDE PORTO SLATE SASSO QUILL**






*The Strength of Depth*



WALL: **GRANDE PORTO SLATE SASSO QUILL** | SIZE: **600X1200MM** | SURFACE: **QUILLTOUCH** | PUNCH: **SASSO**
FLOOR: **PORTO SLATE 180 QUILL** | SIZE: **1200X1800MM** | SURFACE: **QUILLTOUCH**
HIGHLIGHTER WALL: **NECTAR GREEN LUCIDO** | SIZE: **75X300MM** | SURFACE: **RANDOM PUNCH (GLOSSY)**









PORTO GRIGE

**PORTO GRIGE 180 QUILL**
**GRANDE PORTO GRIGE QUILL**
**GRANDE PORTO GRIGE SASSO QUILL**






*A Subtle Symphony of Soft Shadows*

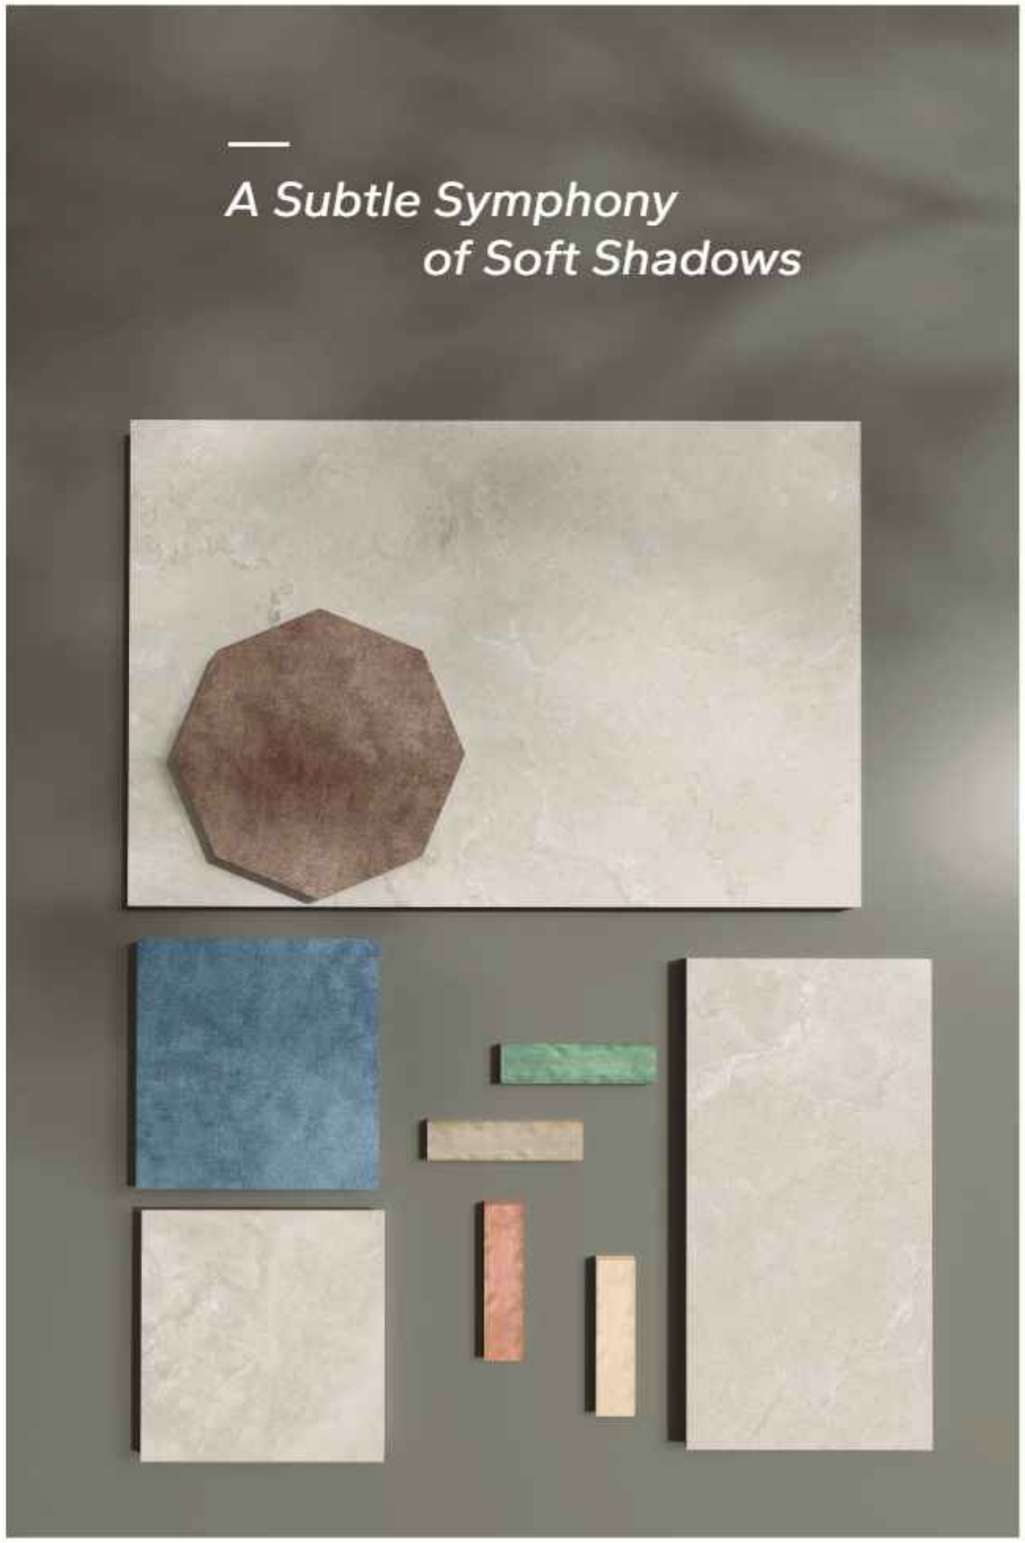

WALL: **PORTO GRIGE 180 QUILL** | SIZE: **1200X1800MM** | SURFACE: **QUILLTOUCH**
FLOOR: **PORTO GRIGE 180 QUILL** | SIZE: **1200X1800MM** | SURFACE: **QUILLTOUCH**
WALL: **GRANDE PORTO GRIGE SASSO QUILL** | SIZE: **600X1200MM** | SURFACE: **QUILLTOUCH** | PUNCH: **SASSO**
COUNTER: **STELLA BERLY 26 MATT** | SIZE: **800X2600MM** | SURFACE: **MATT**









# TECHNICAL SPECIFICATION

| PACKAGING DETAIL FOR PORTO 1200X1800MM COLLECTION | | | | |
|---|---|---|---|---|
| Nominal Size(mm) | Thickness(mm) | Avg. weight per carton(Kgs) | No. of tiles per carton | Coverage area per carton |
| 1200x1800mm | 8.0 | 92.00 | 2 | 4.32sq.mtr. / 46.50sq.ft. |

| TECHNICAL SPECIFICATIONS FOR PORTO 1200X1800MM COLLECTION | | | | |
|---|---|---|---|---|
| Characteristics | Requirement as per IS 15622:2017 E≤ 0.08 Group BIa | Requirement as per ISO 13006:2018 ≤ 0.5% Group BIa | Our Values | Test Method |
| A) Dimension & Surface Quality | | | | |
| I) Length & Width | ± 0.10% | ± 0.5% | ± 0.10% | IS 13630 Part 1/ ISO 10545-2 |
| ii) Thickness | ± 5.00% | ±5.0% | ± 3.0% | |
| iii) Straightness of Side | ± 0.10% | ± 0.50% | ± 0.10% | |
| iv) Rectengularity | ± 0.10% | ± 0.60% | ± 0.10% | |
| v) Surface Flatness | | | | |
| a) Center curvature (%) ( max.Deviation) | ± 0.50% | ± 0.50% | ±0.2% | |
| b) Edge curvature (%) (max.Deviation) | ± 0.50% | ± 0.50% | ±0.2% | |
| c) Corner warpage (%) ( max.Deviation) | ± 0.50% | ± 0.50% | ±0.2% | |
| vi) Surface Quality | Min. 95% of tiles will be free from visible defects | Min. 95% of tiles will be free from visible defects | Min. 95% of tiles will be free from visible defects | |
| B) Physical Properties | | | | |
| i) Water Absorption | Average ≤ 0.08%, Individual Max 0.1% | Av ≤ 0.5%, Individual 0.6% max | < 0.08%, Individual Max 0.1% | IS 13630 Part 2/ISO 10545-3 |
| ii) Modulus of Rupture [N/mm2] | Avg. 35, Individual 32 Min | Avg. 35, Individual 32 Min | Avr. > 35, Individual 32 | IS 13630 Part 6/ISO 10545-4 |
| iii) Breaking Strength in N | 1300 | Min.1300 | Min. 1800 N | |
| iv) Moisture Expansion in mm/m | 0.02 | Test Method Available | 0.02 | IS 13630 Part 3/ISO-10545-10 |
| v) Scratch Hardness of surface (Mohs) | Min 5 | N.A. | >6 | IS 13630 Part 13 |
| vi) Resistant to Abrasion of Glazed Tiles (Class I to V) | Min II | Abrasion Class & Cycle passed | Class IV | IS 13630 Part 11/ISO 10545-7 |
| vii) Coefficient of linear thermal expansion from ambient temperature to 100°C | 6 X $10^{-6}$ K$^{-1}$ Max | Test Method Available | Max 6 X $10^{-6}$ K$^{-1}$ Max | IS 13630 Part 4/ISO 10545-8 |
| viii) Thermal Resistant | 10 cycle min | Required | 10 cycle passed | IS 13630 Part 5/ISO-10545-9 |
| Ix) Crazing Resistant | 4 cycle @ 7.5bar min | Required | 4 cycle passed | IS 13630 Part 9/ISO-10545-11 |
| x) Impact Resistant as Coefficient of Restitution (COR) | 0.55 min | Test Method Available | Min 0.55 | IS 13630 Part 14/ISO-10545-5 |
| xI) Frost Resistant | Required | Required | 100 Cycle Passed | IS 13630 Part 10/ISO 10545-12 |
| C) Chemical Resistant (Glazed Tiles) | | | | |
| I) Stain Resistant | Min Class-1 | Min Class 3 | Class-1 | IS 13630 Part 8 & ISO 10545-14 |
| ii) Resistant to household chemicals | Min Class AA | Min B | Min Class AA | IS 13630 Part 8/ISO 10545-13 |
| iii) Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds) | Required if agreed | declared value. | Min Class AA | |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.



| PACKAGING DETAIL FOR PORTO 600X1200MM COLLECTION | | | | |
|---|---|---|---|---|
| Nominal Size(mm) | Thickness(mm) | Avg. weight per carton(Kgs) | No. of tiles per carton | Coverage area per carton |
| 600x1200mm | 8.8 mm (+/-0.4%) | 27.5KG+/- 0.5KG | 2 | 1.44sq.mtr./15.50sq.ft. |

| TECHNICAL SPECIFICATIONS FOR PORTO 600X1200MM COLLECTION | | | | | | |
|---|---|---|---|---|---|---|
| Characteristics | Requirement as per IS 15622 :2017 Table-09.,W.A E<0.08 Group BIa | | Requirement as per ISO 13006 Annex-G, E ≤ 0.5% Group BIa | Our Values | Test Method | |
| A) Dimension & Surface Quality | | Rectified | | | IS-13630 | ISO 10545 |
| I) Length & Width | | ± 0.10% | ± 0.30% | ± 0.10% | IS 13630 Part 1 | ISO 10545 Part 2 |
| ii) Thickness | ± 5.0% | | ± 5.0% | ± 4.0% | | |
| iii) Straightness of Side | | ± 0.10% | ± 0.3% | ± 0.10% | | |
| iv) Rectengularity | | ± 0.10% | ± 0.30% | ± 0.10% | | |
| v) Surface Flatness | | | | | | |
| a) Center curvature (%) ( max.Deviation) | ± 0.5% | | ± 0.4% | ± 0.20 % | | |
| b) Edge curvature (%) (max.Deviation) | ± 0.5% | | ± 0.4% | ± 0.20 % | | |
| c) Corner warpage (%) ( max.Deviation) | ± 0.5% | | ± 0.4% | ± 0.20 % | | |
| vi) Surface Quality | Min. 95 % of tiles will be free from visible defects | | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | | |
| B) Physical Properties | | | | | | |
| i) Water Absorption | Average ≤ 0.08%, Individual Max 0.1% | | Av ≤ 0.5%, Individual 0.6% max | 0.08 average max | Part 2 | Part 3 |
| ii) Modulus of Rupture [N/mm2] | Avg. 35, Individual 32 min | | Avg. 35, Individual 32 min | Min 35 | Part 6 | Part 4 |
| iii) Breaking Strength in N | Min.1300 | | Not less than 1300 | Min.1300 | | |
| iv) Moisture Expansion in mm/m | 0.02 Max | | Test Method Available | 0.02 Max | Part 3 | Part 10 |
| v) Scratch Hardness of surface (Mohs) | Min 5 | | N/A | 5 | Part 13 | |
| vi) Resistant to Deep Abrasion of Un-Glazed Tiles | N/A | | N/A | N/A | Part 12 | Part 6 |
| vii) Resistant to Abrasion of Glazed Tiles (Class I to V) | Comercial application Min IV Home Application Min II | | Report Abrasion Class & Cycle Passed | Class IV | Part 11 | Part 7 |
| viii) Coefficient of linear thermal expansion from ambient temperature to 100°C | 6 X $10^{-6}$ K$^{-1}$ max | | Test Method Available | 6 X $10^{-6}$ K$^{-1}$ max | Part 4 | Part 8 |
| Ix) Thermal Resistant | 10 cycle min | | Test Method Available | Passed 10 cycle | Part 5 | Part 9 |
| x) Crazing Resistant | 4 cycle @ 7.5bar min | | Required | Passed 4 cycle | Part 9 | Part 11 |
| xI) Frost Resistant | Required, if agreed | | Test Method Available | Resistance | Part 10 | Part 12 |
| xII) Bulk Density | NA | | NA | NA | Part 2 | |
| xiii) Impact Resistant | 0.55 Min | | Test Method Available | 0.55 min | Part 14 | Part 5 |
| C) Chemical Resistant (Glazed Tiles) | | | | | | |
| I) Stain Resistant | Min Class 1 | | Min Class 3 | Class-1 | Part 8 | Part 14 |
| ii) Resistant to household chemicals | Min Class AA | | Min. Class B | Min Class AA | Part 8 | Part 13 |
| iii) Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds) | Required if agreed | | Manufactura to state classification | Min Class AA | | |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE



# TILE VISUALISER




**Choosing the perfect tile for your dream home should be exciting, not overwhelming!** With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

**Your dream tile? Just a click away.**

Toll Free: 1800-103-0004 | www.somanyceramics.com

# SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner




## Lasting Bonds Made Ezy

**Behind Every Stunning Tile, there's a Stronger Bond!**
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com