SOMANY

**Somany Ceramics Limited**
**Corporate Office:** F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
**Ahmedabad Office:** 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
**Registered Office:** 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
**www.somanyceramics.com | E-mail: customer.care@somanyceramics.com**

**Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)**

COVERline / SENSO / CATALOGUE / JAN 2026

# SENSO
## COLLECTION

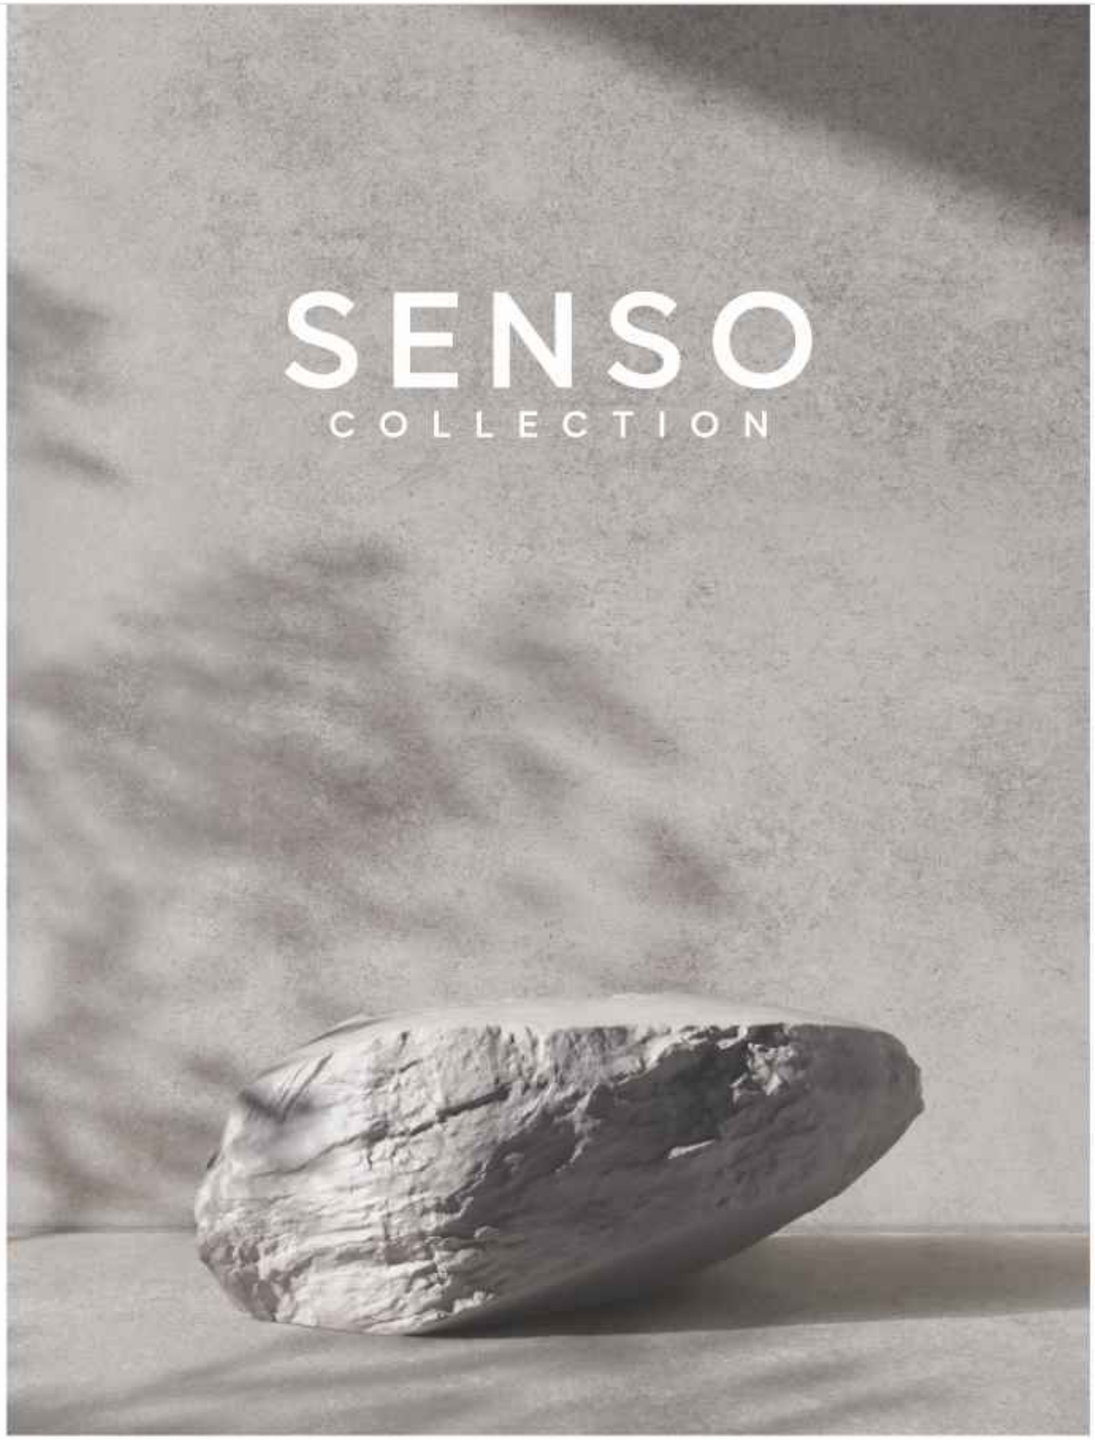

SOMANY



# Tactile Timeless Senso

Somewhere between silence and stone, time leaves behind a memory in textures, in tactility. A quiet erosion, a whisper of wind, a subtle caress spanning centuries. These impressions etched into ancient rocks are now reborn in the Senso collection.

06 Designs

04 Sizes

02 Surfaces

08 Accent Designs

GLAZED VITRIFIED TILES

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| SIZES | 1200x1800mm<br>600x1200mm<br>75x300mm<br>200x200mm | 48"x71"<br>24"x48"<br>3"x12"<br>8"x8" | SURFACES | ShapeTech<br>Matt Carving | THICKNESS | 9mm |





## ShapeTech

ShapeTech digitally recreates the layered intricacies of natural stones with extraordinary precision. This technology delivers multidimensional textures that are visually dynamic and tactile, offering an experience indistinguishable from that of real stone.

## Matt Carving

Matt Carving surface brings quiet sophistication to modern interiors. With refined textures and graceful dimensionality, this surface captures light in a way that highlights its intricate details, adding subtle drama and timeless elegance to any space. Ideal for interiors that seek understated luxury with a distinctive edge.





# Versatile Solution

The Senso collection combines contemporary design with extraordinary performance. Each tile is engineered to resist stains, scratches, heat, chemicals, and more, making them ideal for both residential and commercial spaces. These surfaces don't just endure, they retain their elegance and strength for years, delivering enduring beauty with minimal maintenance.

## Application Areas

- RESTAURANTS
- RETAIL MALLS
- SPA & WELLNESS
- RESIDENTIAL AREAS
- LIVING SPACES
- FITTED KITCHENS & BATHROOMS
- AIRPORTS
- HOTELS
- SHOPS
- OFFICES
- MUSEUMS
- SHOWROOMS

## Technical Features

- SUITABLE FOR INDOORS & OUTDOORS
- HIGHLY UV RESISTANT
- FIRE & HEAT RESISTANT
- SCRATCH RESISTANT
- THERMAL SHOCK RESISTANT
- HYGIENIC SURFACE
- STAIN RESISTANT
- EASY TO CLEAN
- FROST RESISTANT
- CHEMICAL RESISTANT

## Senso Collection

### Malta Grey



1200x1800mm
Matt Carving, ShapeTech

### Malta Grey Rivera



600x1200mm
Punch

### Malta Natural



1200x1800mm
Matt Carving, ShapeTech

### Malta Natural Rivera



600x1200mm
Punch

### Malta Tan



1200x1800mm
Matt Carving

### Malta Tan Rivera



600x1200mm
Punch

### Malta Oyster



1200x1800mm
Matt Carving

### Malta Oyster Rivera



600x1200mm
Punch



### Castle Copper



1200x1800mm
ShapeTech

### Luxura Beige



1200x1800mm
ShapeTech

Scan for a virtual view



# Malta Grey & Malta Natural

The Malta Series redefines industrial elegance with its raw texture and soft tones. The Malta Grey introduces a cool contemporary feel, while Malta Natural adds a warm neutrality perfect for balanced, modern spaces that feel both grounded and elevated.





Floor 1: Malta Grey, 1200x1800mm
Floor 2: Malta Natural Rivera, 600x1200mm

Accent Wall 1: Domino Grey, 300x300mm

Wall 1: Malta Grey, 1200x1800mm
Wall 2: Malta Grey Rivera, 600x1200mm

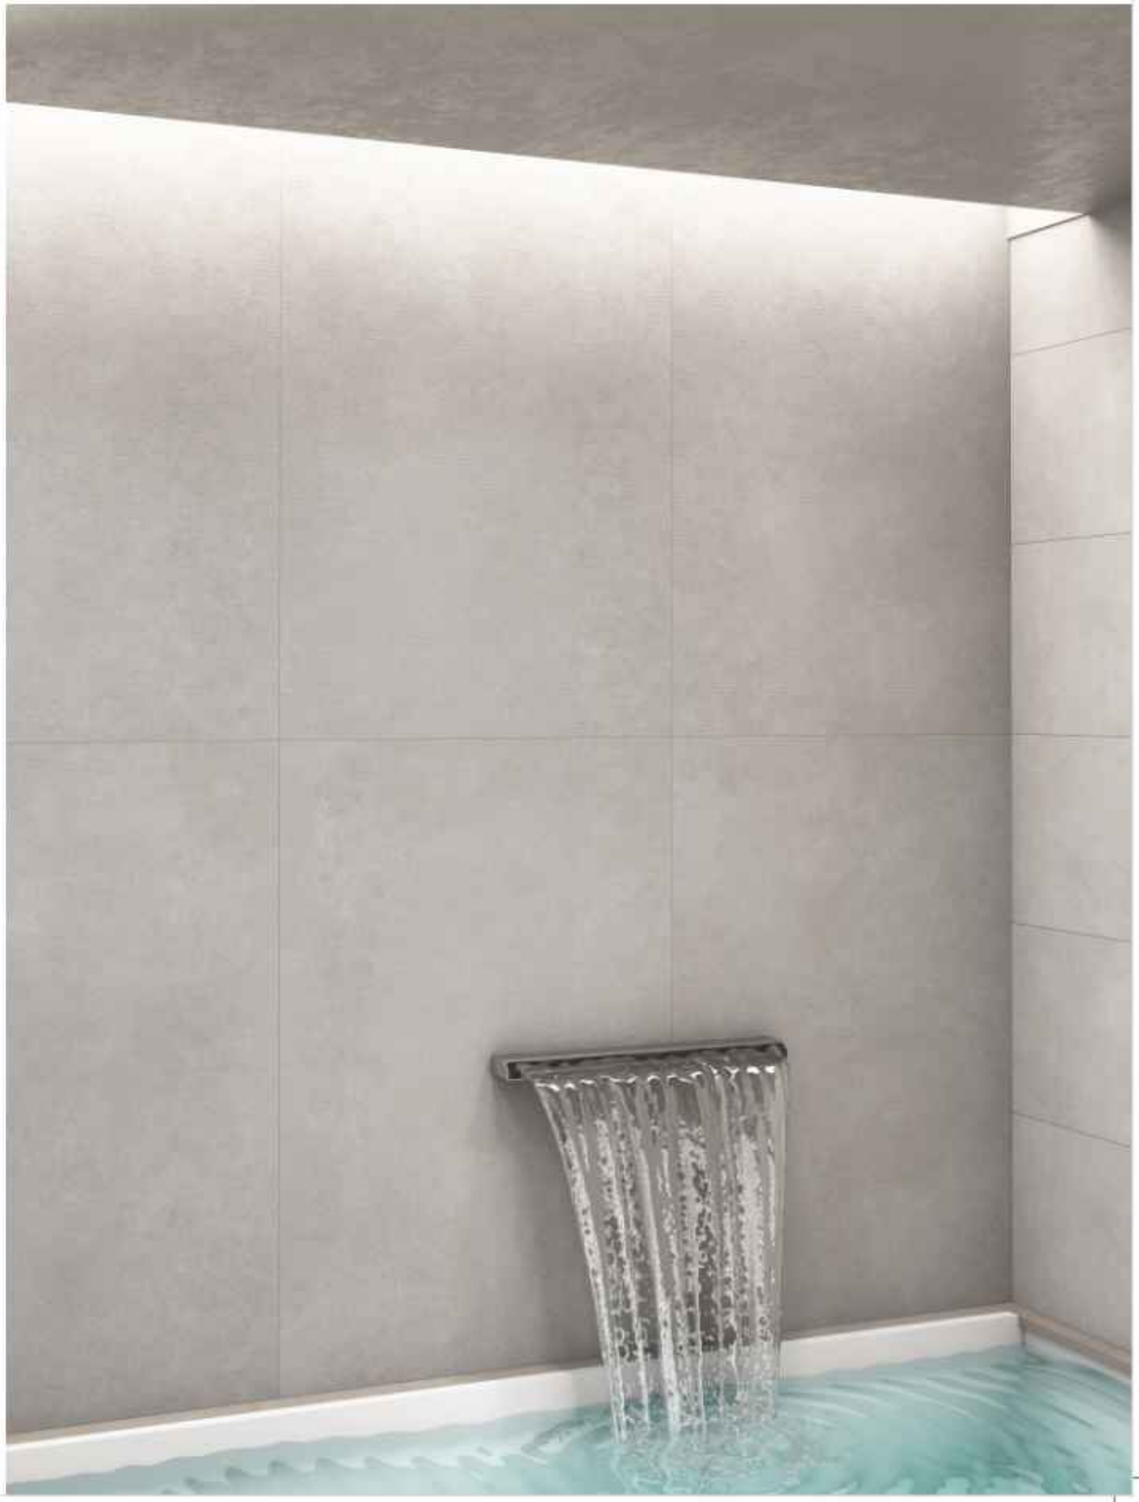

Floor 1: Malta Grey, 1200x1800mm
Floor 2: Malta Natural Rivera, 600x1200mm
Accent Wall 2: Domino Grey, 300x300mm

Wall 1: Malta Grey, 1200x1800mm
Wall 2: Malta Grey Rivera, 600x1200mm
Accent Wall 1: Swatch Grey, 200x200mm

Scan for a virtual view



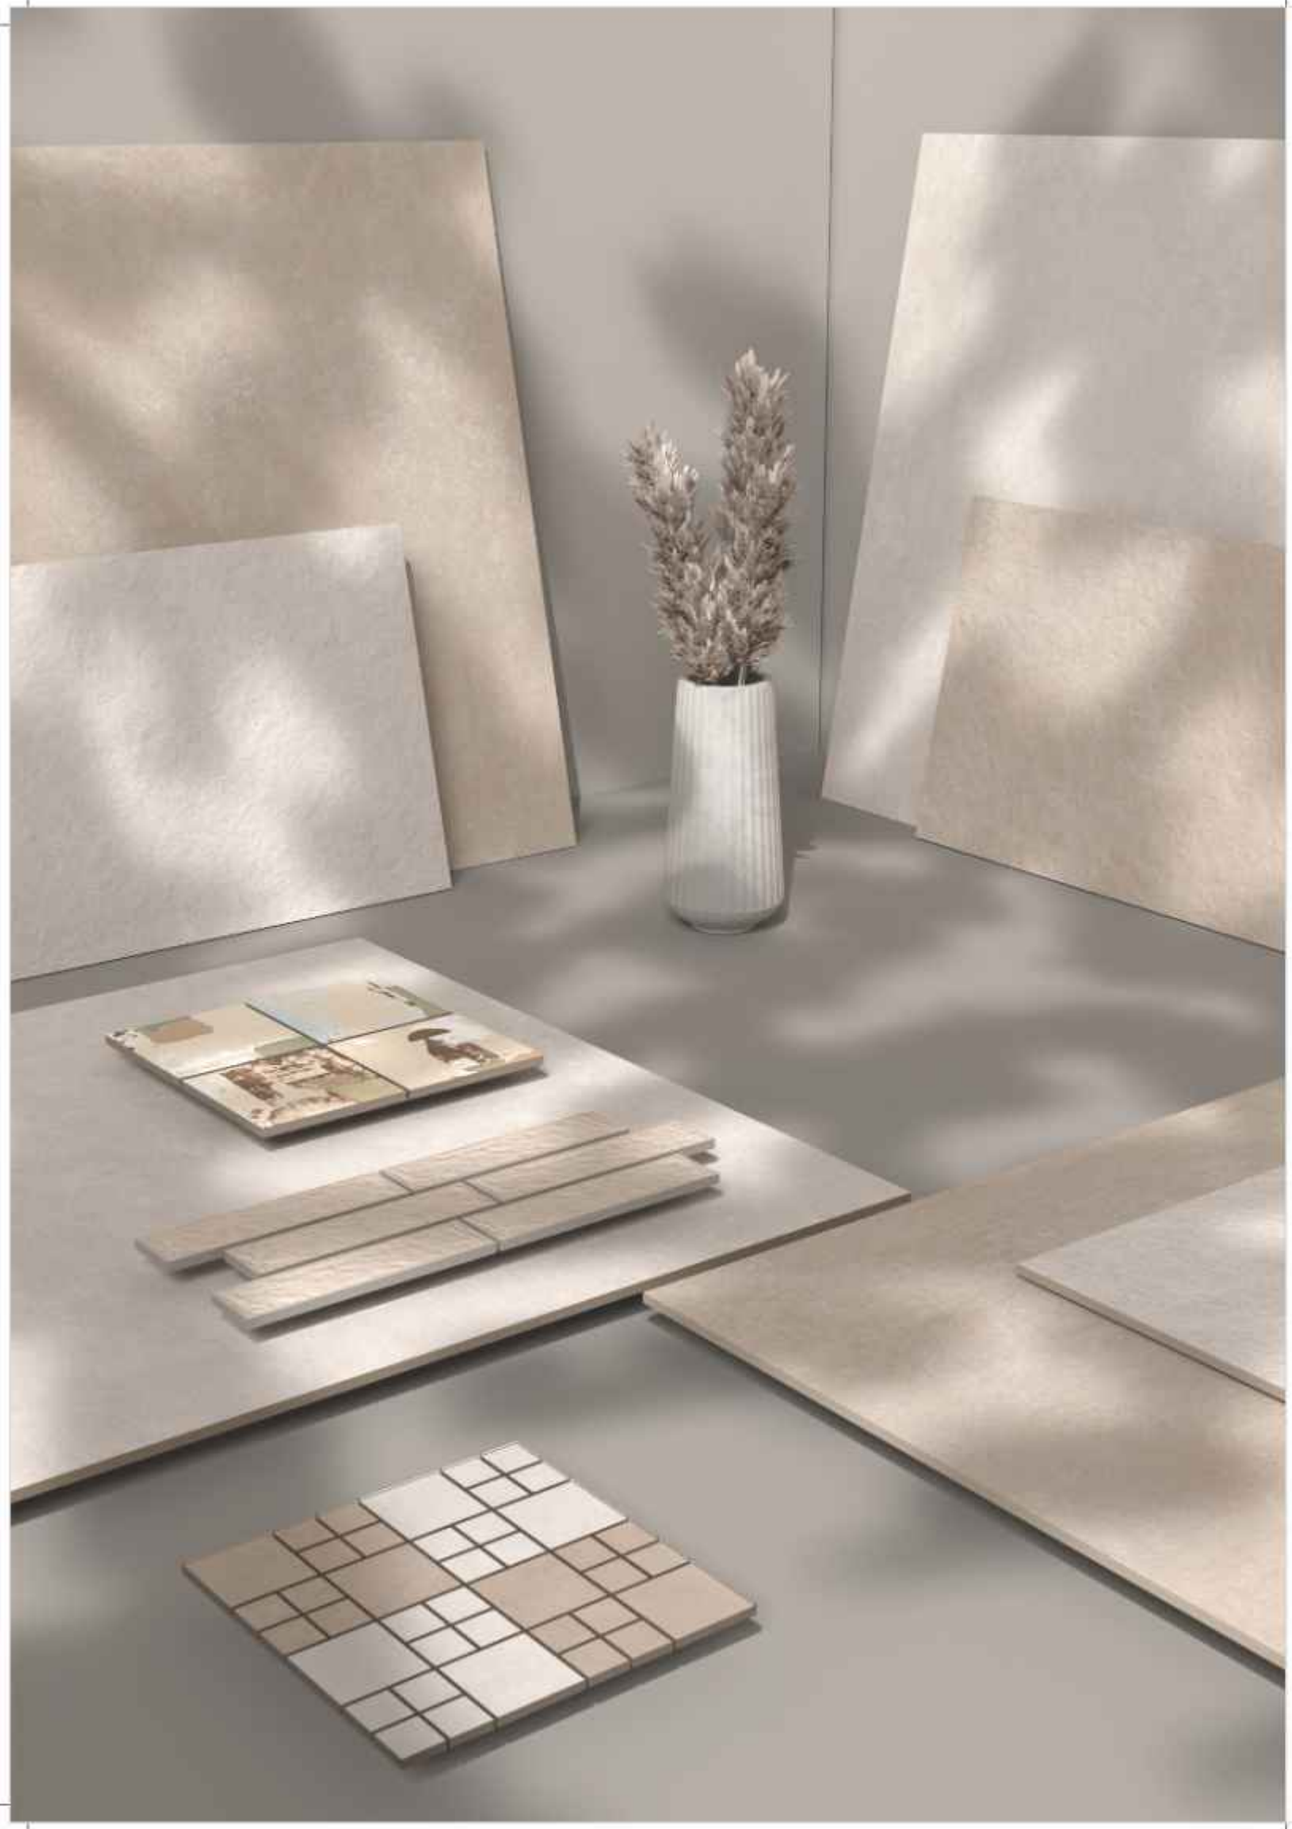

# Malta Tan & Malta Oyster

Malta Tan offers a warm, sand-toned aesthetic that radiates comfort and subtle richness. In contrast, Malta Oyster delivers a light, airy palette that brightens interiors, both maintaining the raw appeal of cement with sophisticated restraint.



Floor: Malta Tan, 1200x1800mm
Accent Floor: Swatch Tan, 200x200mm





Floor: Malta Tan, 1200x1800mm



Floor: Malta Tan, 1200x1800mm
Accent Floor: Swatch Tan, 200x200mm

Wall 1: Malta Tan Rivera, 600x1200mm
Wall 2: Mattoni Oyster, 75x300mm
Backsplash Wall: Domino Oyster, 300x300mm

Scan for a virtual view



2

Malta Grey



1

Malta Grey
Rivera

2

Mattoni
Grey

5

Swatch
Grey



Domino
Grey



3

4

| No. | Sizes | Surfaces | Thickness | Randoms |
|---|---|---|---|---|
| 1 | 1200x1800mm | Matt Carving, ShapeTech | 9mm | 3 |
| 2 | 600x1200mm | Punch | 9mm | 3 |
| 3 | 300x300mm | ShapeTech, Carving | 9mm | - |
| 4 | 200x200mm | Matt Carving | 9mm | 16 |
| 5 | 75x300mm | Matt | 9mm | 16 |



2

Malta Natural



1

Malta
Natural
Rivera

2

Mattoni
Natural

5

Swatch
Grey



Domino
Grey



3

4

| No. | Sizes | Surfaces | Thickness | Randoms |
|---|---|---|---|---|
| 1 | 1200x1800mm | Matt Carving, ShapeTech | 9mm | 3 |
| 2 | 600x1200mm | Punch | 9mm | 9 |
| 3 | 300x300mm | ShapeTech, Carving | 9mm | - |
| 4 | 200x200mm | Matt Carving | 9mm | 16 |
| 5 | 75x300mm | Matt | 9mm | 16 |



2

Malta Tan



1

Malta Tan
Rivera

Mattoni
Tan



5

Swatch
Tan



Domino
Oyster



3

4

| No. | Sizes | Surfaces | Thickness | Randoms |
|---|---|---|---|---|
| 1 | 1200x1800mm | Matt Carving | 9mm | 3 |
| 2 | 600x1200mm | Punch | 9mm | 3 |
| 3 | 300x300mm | ShapeTech, Carving | 9mm | - |
| 4 | 200x200mm | Matt Carving | 9mm | 16 |
| 5 | 75x300mm | Matt | 9mm | 16 |



2

Malta Oyster



1

Malta Oyster
Rivera

Mattoni
Oyster



5

Swatch
Tan



Domino
Oyster



3

4

| No. | Sizes | Surfaces | Thickness | Randoms |
|---|---|---|---|---|
| 1 | 1200x1800mm | Matt Carving | 9mm | 3 |
| 2 | 600x1200mm | Punch | 9mm | 9 |
| 3 | 300x300mm | ShapeTech, Carving | 9mm | - |
| 4 | 200x200mm | Matt Carving | 9mm | 16 |
| 5 | 75x300mm | Matt | 9mm | 16 |

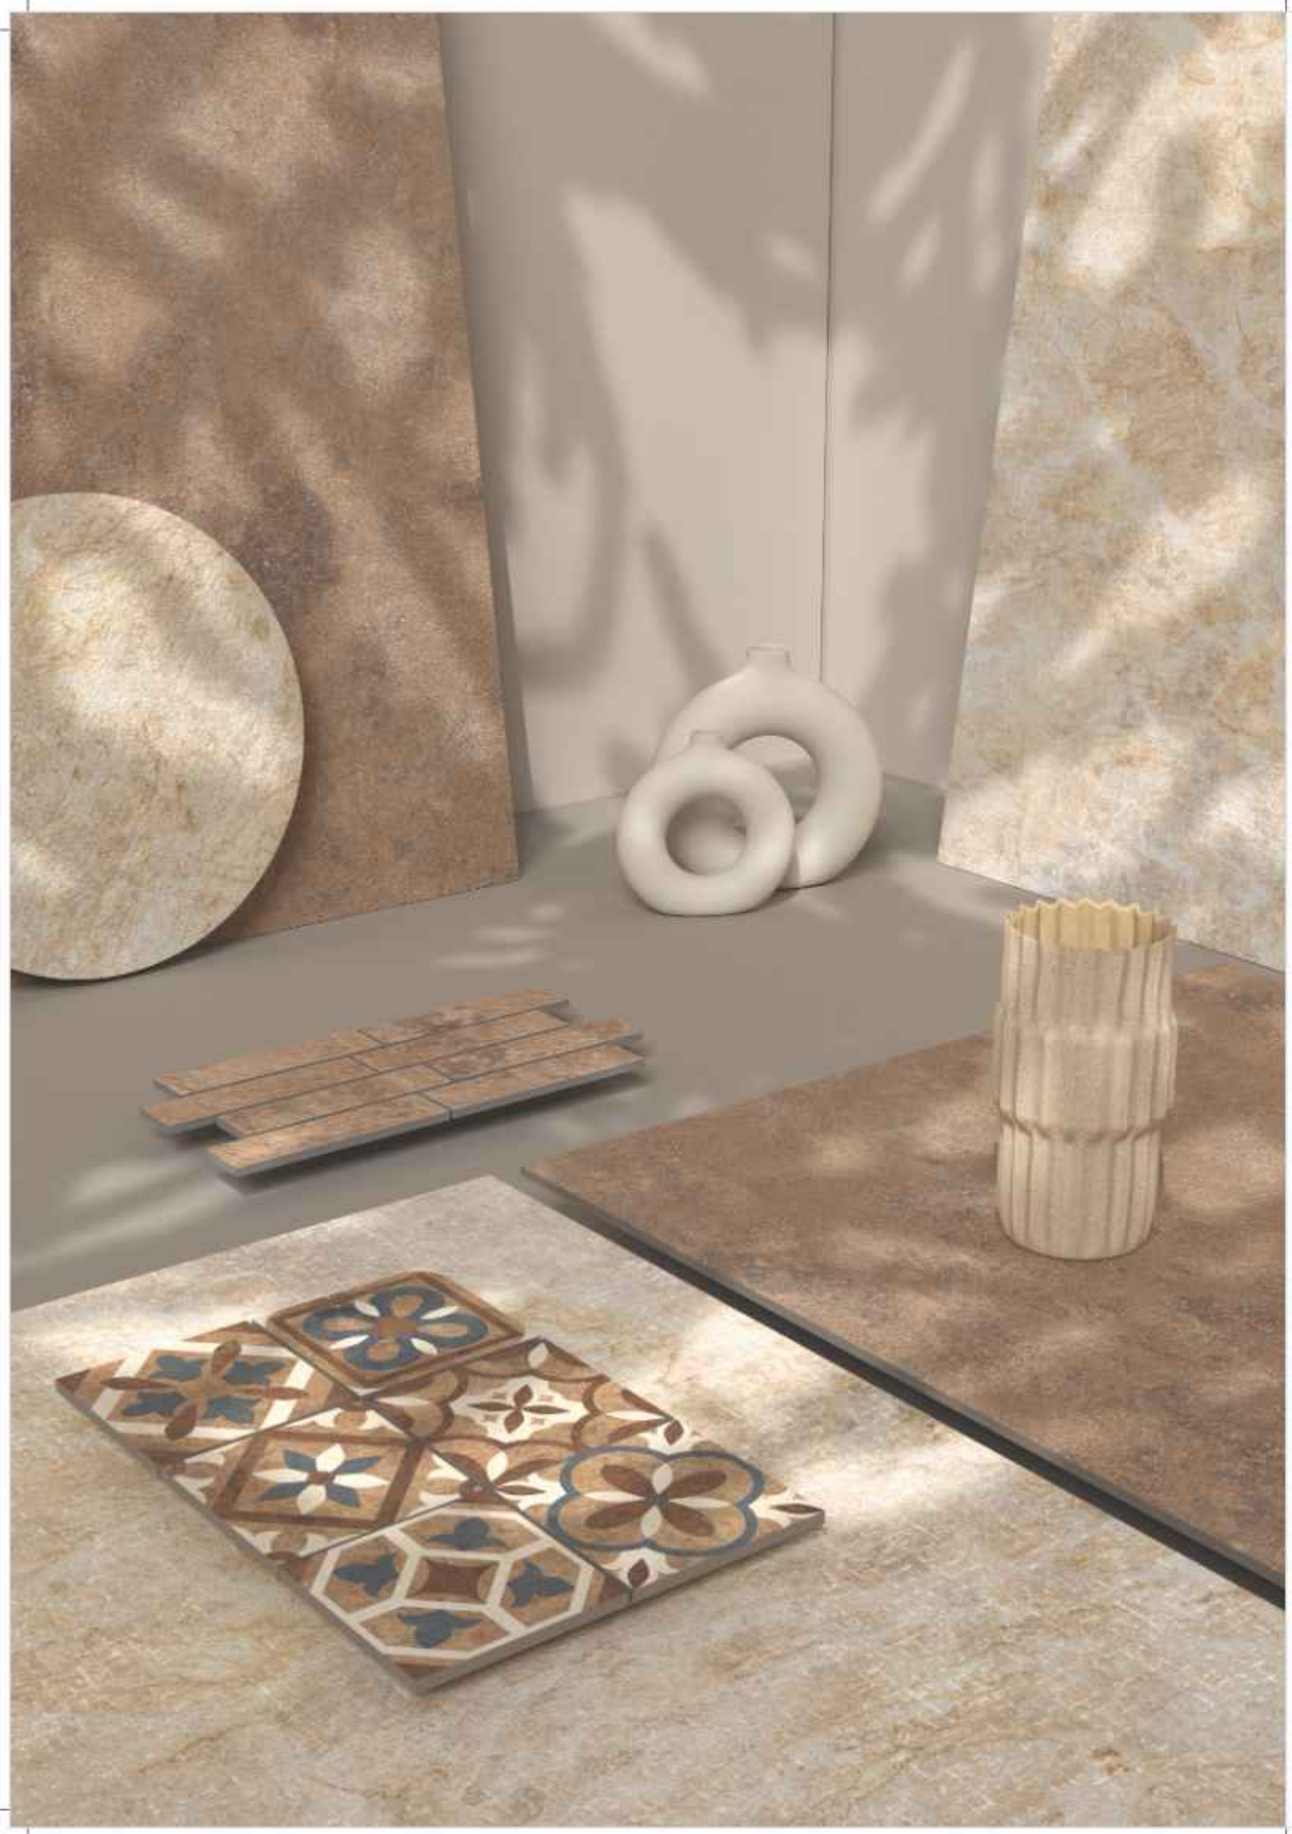

# Castle Copper & Luxura Beige

Castle Copper features warm metallic undertones and textured surfaces that bring regal richness to interiors. Luxura Beige, on the other hand, embodies understated luxury with soft, creamy hues and a refined texture that exudes calm and elegance. Together, they offer dramatic contrast and harmonious versatility.





Wall & Steps: Luxura Beige, 1200x1800mm

Wall Front: Mattoni Luxura, 75x300mm
Accent Wall: Royale Rustic, 200x200mm





Floor: Castle Copper, 1200x1800mm
Wall & Steps: Luxura Beige, 1200x1800mm
Wall Front: Mattoni Luxura, 75x300mm
Accent Wall: Royale Rustic, 200x200mm

Scan for a virtual view



2

Castle Copper

1



Royale
Rustic



2

Mattoni
Castle



3

| No. | Sizes | Surfaces | Thickness | Randoms |
|---|---|---|---|---|
| 1 | 1200x1800mm | ShapeTech | 9mm | 2 |
| 2 | 200x200mm | Matt Carving | 9mm | 9 |
| 3 | 75x300mm | Matt | 9mm | 16 |



2

Luxura Beige

1



Royale
Rustic



2

Mattoni
Luxura



3

| No. | Sizes | Surfaces | Thickness | Randoms |
|---|---|---|---|---|
| 1 | 1200x1800mm | ShapeTech | 9mm | 2 |
| 2 | 200x200mm | Matt Carving | 9mm | 9 |
| 3 | 75x300mm | Matt | 9mm | 16 |

## TECHNICAL SPECIFICATION FOR SENSO COLLECTION

| CHARACTERISTICS | REQUIREMENT AS PER IS 15622 :2017 E ≤ 0.08 GROUP B I A | REQUIREMENT AS PER ISO 13006:2018 ≤ 0.5% GROUP B I A | OUR VALUES | TEST METHOD |
|---|---|---|---|---|
| **Dimension & Surface Quality** | | | | |
| Length & Width % | ± 0.10% | ± 0.5% | ± 0.10% | IS 13630 Part 1 / ISO 10545-2 |
| Thickness % | ± 5.0% | ± 5.0% | ± 3.0% | |
| Straightness of Side % | ± 0.10% | ± 0.50% | ± 0.10% | |
| Rectangularity % | ± 0.10% | ± 0.60% | ± 0.10% | |
| Surface Flatness | | | | |
| Center Curvature (%) ( Max. Deviation) | ± 0.50% | ± 0.50% | ± 0.2 % | |
| Edge Curvature (%) ( Max. Deviation) | ± 0.50% | ± 0.50% | ± 0.2 % | |
| Corner Warpage (%) ( Max. Deviation) | ± 0.50% | ± 0.50% | ± 0.2 % | |
| Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| **Physical Properties** | | | | |
| Water Absorption | Average ≤ 0.08%, Individual Max.0.1% | Av ≤ 0.5 %, Individual 0.6% max | <0.08%, Individual Max 0.1% | IS 13630 Part 2/ ISO 10545-3 |
| Modulus of Rupture [N/mm²] | Avr 35, Individual 32 Min | Av 35, Individual 32 min | Avr. > 35, Individual 32 | IS 13630 Part 6/ISO 10545-4 |
| Breaking Strength in N | 1300 | Min.1300 | Min. 1300 | |
| Moisture Expansion in mm/m | 0.02 | Test method available | 0.02 | IS 13630 Part 3 / ISO-10545-10 |
| Scratch Hardness of surface (Mohs) | Min 5 | N.A | Min 3 | IS 13630 Part 13 |
| Resistant to Abrasion of Glazed Tiles (Class I to V) | Min II | Abrasion Class & Cycle passed | PEI III | IS 13630 Part 11 /ISO 10545-7 |
| Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C | 6 X 10 $^{-6}$ K$^{-1}$ max | Test method available | Max 6 X 10 $^{-6}$ K$^{-1}$ max | IS 13630 Part 4/ ISO 10545-8 |
| Thermal Shock Resistant | 10 cycle Min | Required | 10 cycle passed | IS 13630 Part 5/ISO-10545-9 |
| Crazing Resistant | 4 cycle @ 7.5bar min | Required | 4 cycle passed | IS 13630 Part 9/ISO 10545-11 |
| Impact Resistant as Co-efficient of Restitution (COR) | 0.55 min | Test method available | 0.55 Min | IS 13630 Part 14/ISO 10545-5 |
| Frost Resistant | Required | Required | 100 Cycle Passed | IS 13630 Part 10/ISO 10545-12 |
| **Stain & Chemical Resistant (Glazed Tiles)** | | | | |
| Stain Resistant | Min Class 1 | Min Class 3 | Class 1 | IS 13630 Part 8 & I SO 10545-14 |
| Resistant to Household Chemicals | Min Class AA | Min B | Min Class AA | IS 13630 Part 8 / ISO 10545-13 |
| Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds) | Required if agreed | Declared Value[1] | Min Class AA | |

## PACKAGING DETAIL FOR SENSO COLLECTION

| Nominal Size (mm) | Thickness (mm) | Avg. Wt. Per Carton (Kg.) | No. of Tiles Per Carton | Coverage Area Per Carton |
|---|---|---|---|---|
| 600x1200mm (Sinker) | 8.2 | 27.2 | 2 | 1.44sq.mtr./15.5sq.ft. |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

## TECHNICAL SPECIFICATION FOR SENSO COLLECTION

| CHARACTERISTICS | REQUIREMENT AS PER IS 15622 :2017 E ≤ 0.08 GROUP B I A | REQUIREMENT AS PER ISO 13006:2018 ≤ 0.5% GROUP B I A | OUR VALUES | TEST METHOD |
|---|---|---|---|---|
| **Dimension & Surface Quality** | | | | |
| Length & Width % | ± 0.10% | ± 0.5% | ± 0.10% | IS 13630 Part 1 / ISO 10545-2 |
| Thickness % | ± 5.0% | ± 5.0% | ± 3.0% | |
| Straightness of Side % | ± 0.10% | ± 0.50% | ± 0.10% | |
| Rectangularity % | ± 0.10% | ± 0.60% | ± 0.10% | |
| Surface Flatness | | | | |
| Center Curvature (%) ( Max. Deviation) | ± 0.50% | ± 0.50% | ± 0.2 % | |
| Edge Curvature (%) ( Max. Deviation) | ± 0.50% | ± 0.50% | ± 0.2 % | |
| Corner Warpage (%) ( Max. Deviation) | ± 0.50% | ± 0.50% | ± 0.2 % | |
| Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| **Physical Properties** | | | | |
| Water Absorption | Average ≤ 0.08%, Individual Max.0.1% | Av ≤ 0.5 %, Individual 0.6% max | <0.08%, Individual Max 0.1% | IS 13630 Part 2/ ISO 10545-3 |
| Modulus of Rupture [N/mm²] | Avr 35, Individual 32 Min | Av 35, Individual 32 min | Avr. > 35, Individual 32 | IS 13630 Part 6/ISO 10545-4 |
| Breaking Strength in N | 1300 | Min.1300 | Min. 1800 | |
| Moisture Expansion in mm/m | 0.02 | Test method available | 0.02 | IS 13630 Part 3 / ISO-10545-10 |
| Scratch Hardness of surface (Mohs) | Min 5 | N.A | Carvo-6, Polish-3 Quill Glam-6 Quill Soft-5, Shape-6 | IS 13630 Part 13 |
| Resistant to Abrasion of Glazed Tiles (Class I to V) | Min II | Abrasion Class & Cycle passed | Carvo-IV, Polish-III, Quill Glam-IV, Quill Soft-III, Shape-III | IS 13630 Part 11 /ISO 10545-7 |
| Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C | 6 X 10 $^{-6}$ K$^{-1}$ max | Test method available | Max 6 X 10 $^{-6}$ K$^{-1}$ max | IS 13630 Part 4/ ISO 10545-8 |
| Thermal Shock Resistant | 10 cycle Min | Required | 10 cycle passed | IS 13630 Part 5/ISO-10545-9 |
| Crazing Resistant | 4 cycle @ 7.5bar min | Required | 4 cycle passed | IS 13630 Part 9/ISO 10545-11 |
| Impact Resistant as Co-efficient of Restitution (COR) | 0.55 min | Test method available | 0.55 Min | IS 13630 Part 14/ISO 10545-5 |
| Frost Resistant | Required | Required | 100 Cycle Passed | IS 13630 Part 10/ISO 10545-12 |
| **Stain & Chemical Resistant (Glazed Tiles)** | | | | |
| Stain Resistant | Min Class 1 | Min Class 3 | Class 1 | IS 13630 Part 8 & I SO 10545-14 |
| Resistant to Household Chemicals | Min Class AA | Min B | Min Class AA | IS 13630 Part 8 / ISO 10545-13 |
| Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds) | Required if agreed | Declared Value[1] | Min Class AA | |

## PACKAGING DETAIL FOR SENSO COLLECTION

| Nominal Sizes (mm) | Thickness (mm) | Avg. Wt. Per Carton (Kg.) | No. of Tiles Per Carton | Coverage Area Per Carton |
|---|---|---|---|---|
| 1200x2400mm | 9 | 61.7 | 1 | 2.88sq.mtr./31.00sq.ft. |
| 1200x1800mm | 9 | 91 | 2 | 4.32sq.mtr./46.50sq.ft. |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

## TECHNICAL SPECIFICATION FOR SENSO COLLECTION

| CHARACTERISTICS | REQUIREMENT AS PER IS 15622 :2017 0.08<E<3% GROUP B I b | REQUIREMENT AS PER ISO 13006:2018 ≤ 0.5% GROUP B I a | OUR VALUES | TEST METHOD |
|---|---|---|---|---|
| **Dimension & Surface Quality** | | | | |
| Length & Width % | ± 0.5% | ± 0.6% | ± 0.50% | IS 13630 Part 1 / ISO 10545-2 |
| Thickness % | ± 10.0% | ± 5.0% | ± 5.0% | |
| Straightness of Side % | ± 0.50% | ± 0.50% | ± 0.50% | |
| Rectangularity % | ± 0.60% | ± 0.50% | ± 0.50% | |
| Surface Flatness | | | | |
| Center Curvature (%) ( Max. Deviation) | ± 0.75% | ± 0.50% | ± 0.50 % | |
| Edge Curvature (%) ( Max. Deviation) | ± 0.75% | ± 0.50% | ± 0.50 % | |
| Corner Warpage (%) ( Max. Deviation) | ± 0.75% | ± 0.50% | ± 0.50 % | |
| Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| **Physical Properties** | | | | |
| Water Absorption | Av 0.08<E<3%, Individual 3.3 max | Avg. 0.5 %, Individual 0.6% max | Avg. <0.5% | IS 13630 Part 2/ ISO 10545-3 |
| Modulus of Rupture [N/mm²] | Av 30, Individual 27 min | Avr 35, Individual 32 Min | Avr. > 35 | IS 13630 Part 6/ISO 10545-4 |
| Breaking Strength in N | 1100 N | Min 1300 N | Min. 1300 N | |
| Moisture Expansion in mm/m | 0.02 | Test method available | Max 0.02 | IS 13630 Part 3 / ISO-10545-10 |
| Scratch Hardness of surface (Mohs) | Min 5 | N.A | Min. 6 | IS 13630 Part 13 |
| Resistant to Abrasion of Glazed Tiles (Class I to V) | Min II | Min Class II | Gr IV | IS 13630 Part 11 /ISO 10545-7 |
| Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C | 7 X 10 $^{-6}$ K$^{-1}$ max | Test method available | Max 6 X 10 $^{-6}$ K$^{-1}$ max | IS 13630 Part 4/ ISO 10545-8 |
| Thermal Shock Resistant | 10 cycle Min | Required | 10 cycle passed | IS 13630 Part 5/ISO-10545-9 |
| Crazing Resistant | 4 cycle @ 7.5bar min | N.A. | 4 cycle passed | IS 13630 Part 9/ISO 10545-11 |
| Impact Resistant as Co-efficient of Restitution (COR) | 0.55 min | Test method available | 0.55 Min | IS 13630 Part 14/ISO 10545-5 |
| Frost Resistant | Required | Required | 100 Cycle Passed | IS 13630 Part 10/ISO 10545-12 |
| **Stain & Chemical Resistant** | | | | |
| Stain Resistant | Not Available | Min Class 3 | Class 2 | IS 13630 Part 8 & I SO 10545-14 |
| Resistant to Household Chemicals | Test method available | Min B | Min Class AA | IS 13630 Part 8 / ISO 10545-13 |
| Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds) | Test method available | Declared Value' | A | |

## PACKAGING DETAIL FOR SENSO COLLECTION

| Nominal Size (mm) | Thickness (mm) | Avg. Wt. Per Carton (Kg.) | No. of Tiles Per Carton | Coverage Area Per Carton |
|---|---|---|---|---|
| 200x200mm (Unrectified) | 8.0 | 13.0 | 19 | 0.76sq.mtr./8.18sq.ft. |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

## TECHNICAL SPECIFICATION FOR SENSO COLLECTION

| CHARACTERISTICS | Requirment as per IS 15622: 2017 E>10 Group BIII | Requirements as per ISO 13006: 2018 E>10 Group BIII | OUR VALUES | TEST METHOD |
|---|---|---|---|---|
| **Dimension & Surface Quality** | | | | |
| Length & Width % | ± 0.5% | ± 0.6% | ± 0.5% | IS 13630 Part 1 / ISO 10545-2 |
| Thickness % | ± 7.0% | ± 10.0% | ± 7.0% | |
| Straightness of Side % | ± 0.2% | ± 0.5% | ± 0.2% | |
| Rectangularity % | ± 0.3% | ± 0.5% | ± 0.3% | |
| Surface Flatness | | | | |
| Center Curvature (%) ( Max. Deviation) | ± 0.3% | ± 0.5% | ± 0.3 % | |
| Edge Curvature (%) ( Max. Deviation) | ± 0.3% | ± 0.5% | ± 0.3 % | |
| Corner Warpage (%) ( Max. Deviation) | ± 0.3% | ± 0.5% | ± 0.3 % | |
| Surface Quality | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | Min. 95 % of tiles will be free from visible defects | |
| **Physical Properties** | | | | |
| Water Absorption | E ≥ 10 % when it exceeds 20 % this shall be indecated by the manufacturer | E ≥ 10 % when it exceeds 20 % this shall be indecated by the manufacturer | Avg. 10-20 % | IS 13630 Part 2/ ISO 10545-3 |
| Modulus of Rupture [N/mm²] | Min 12 | Average Min 12 | Average > 12 | IS 13630 Part 6/ISO 10545-4 |
| Breaking Strength in N | Min 200 | Min.200 | Min. 200 | |
| Scratch Hardness of surface (Mohs) | Min 3 | N.A | Min 3 | IS 13630 Part 13 |
| Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C | 9 X 10 $^{-6}$ K$^{-1}$ max | N.A. | Max 8 X 10 $^{-6}$ K$^{-1}$ max | IS 13630 Part 4/ ISO 10545-8 |
| Thermal Shock Resistant | 10 cycle Min | Test method available | 10 cycle Min | IS 13630 Part 5/ISO-10545-9 |
| Crazing Resistant | 4 cycle @ 7.5bar min | Manufacturer to Declared | 4 cycle @ 7.5bar min | IS 13630 Part 9/ISO 10545-11 |
| **Stain & Chemical Resistant** | | | | |
| Stain Resistant | Min Class 1 | Min Class 3 | Class 1 | IS 13630 Part 8 & ISO 10545-14 / ISO 10545-13 |
| Resistant to Household Chemicals | Min Class AA | Test method available | Min Class AA | |
| Resistant to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds) | Required if agreed | Test method available | Min Class AA | |

## PACKAGING DETAIL FOR SENSO COLLECTION

| Nominal Size (mm) | Thickness (mm) | Avg. Wt. Per Carton (Kg.) | No. of Tiles Per Carton | Coverage Area Per Carton |
|---|---|---|---|---|
| 75x300mm (Rectified) | 7.5 | 12.9 | 44 | 0.990sq.mtr./10.66sq.ft. |

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.