SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

VITRO / SOLUBLE SALT / CATALOGUE / MAY 2026

UNIT 03 RANGE VOL 2 | MAY 2026


SOLUBLE SALT
collection


600 x 600mm


SOMANY VITRO



Infused Depth.
Timeless Resilience.

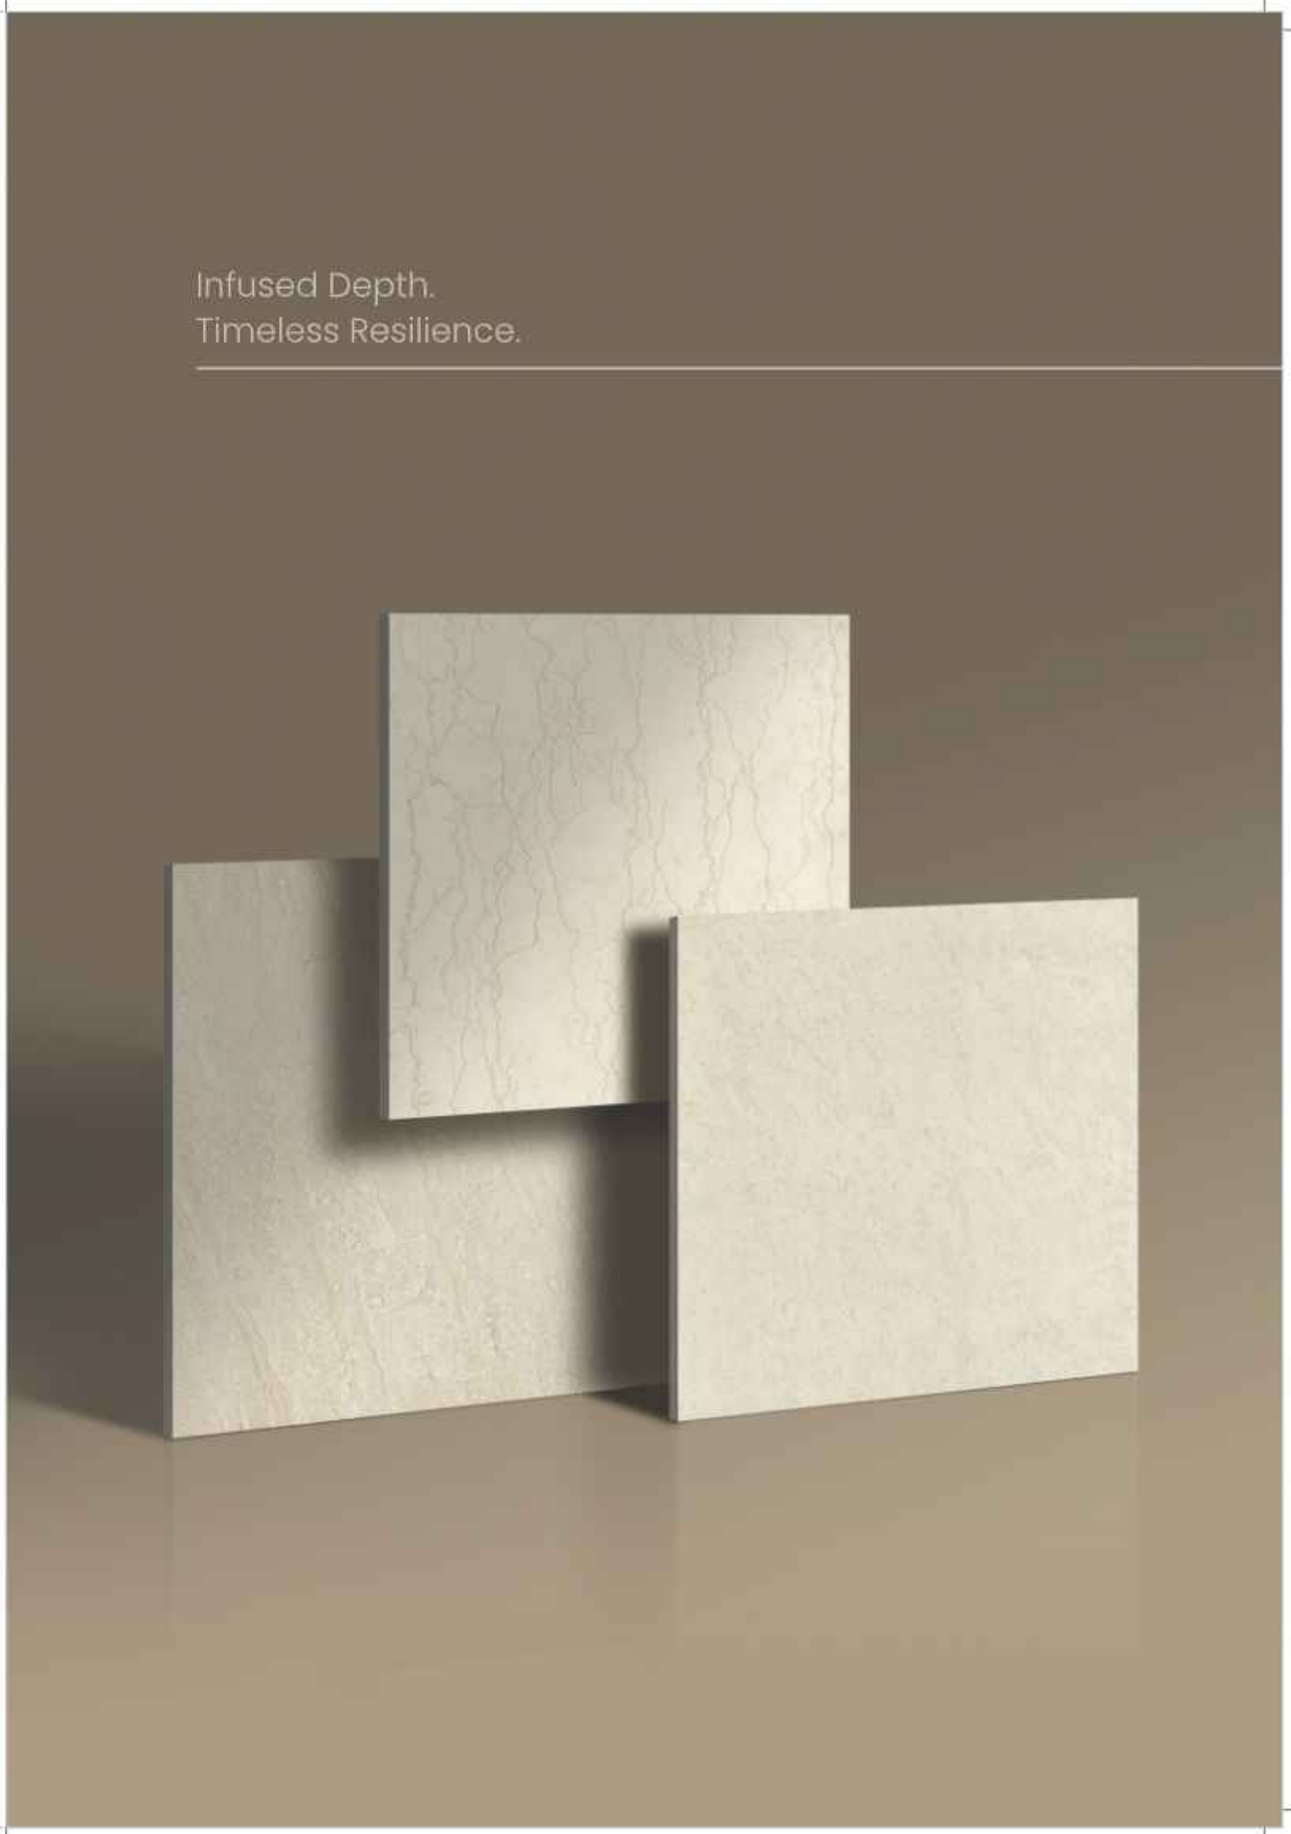

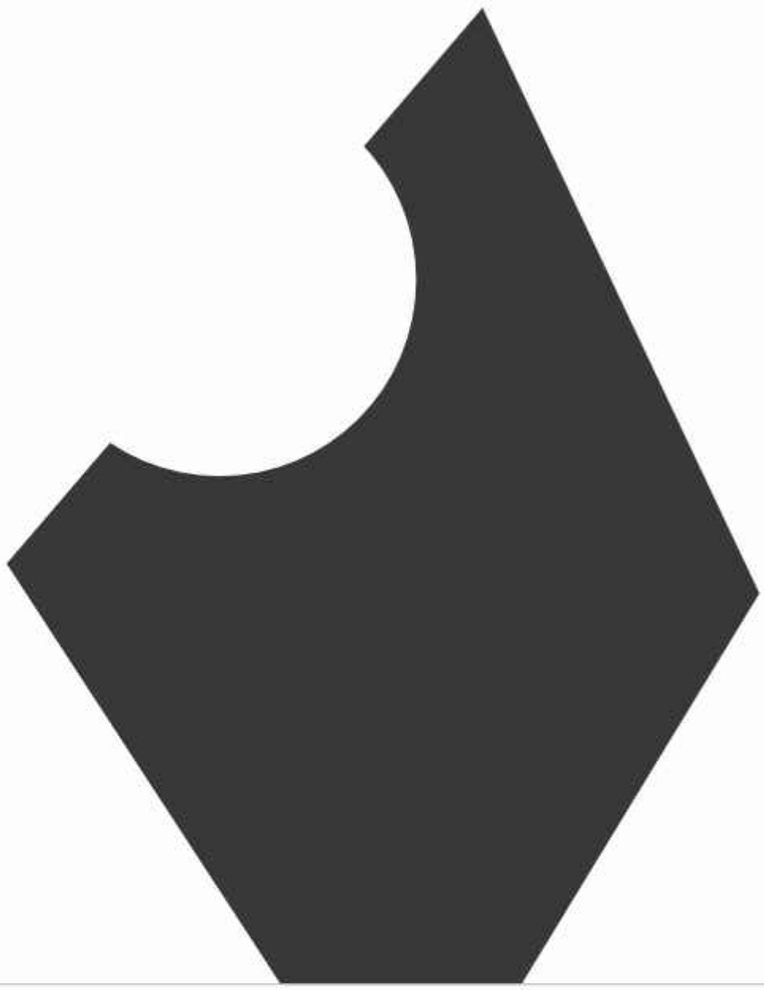

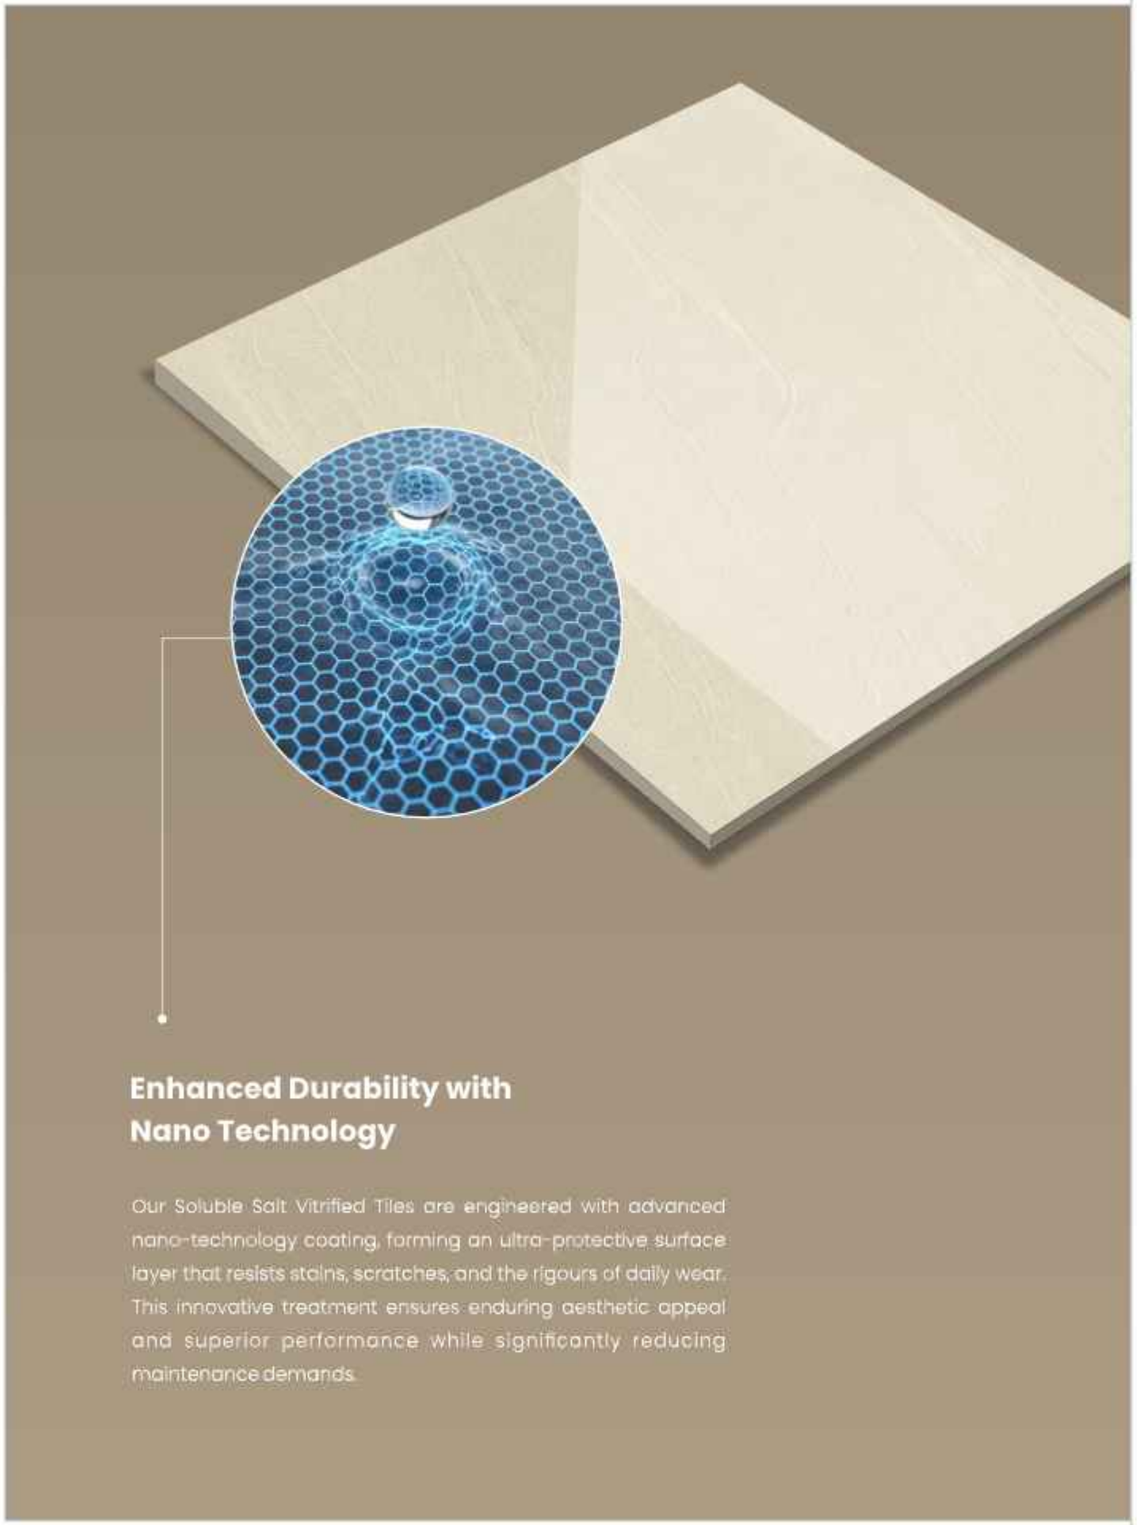

Enhanced Durability with Nano Technology

Our Soluble Salt Vitrified Tiles are engineered with advanced nano-technology coating, forming an ultra-protective surface layer that resists stains, scratches, and the rigours of daily wear. This innovative treatment ensures enduring aesthetic appeal and superior performance while significantly reducing maintenance demands.


600x
600mm


TECHNICAL FEATURES


- Water Repellent
- Temperature Resistant
- Non-Reflective
- Thermal Resistant
- Frost Resistant
- Chemical Resistant
- Abrasion and Wear-Resistant
- Hygienic Surface
- Load and Stress-Resistant

APPLICATION AREAS

- Residential Areas
- Commercial Areas
- Hospitals
- Schools and Colleges
- Outdoor Furniture
- Public Places
- Shops and Malls
- Hotels and Restaurants

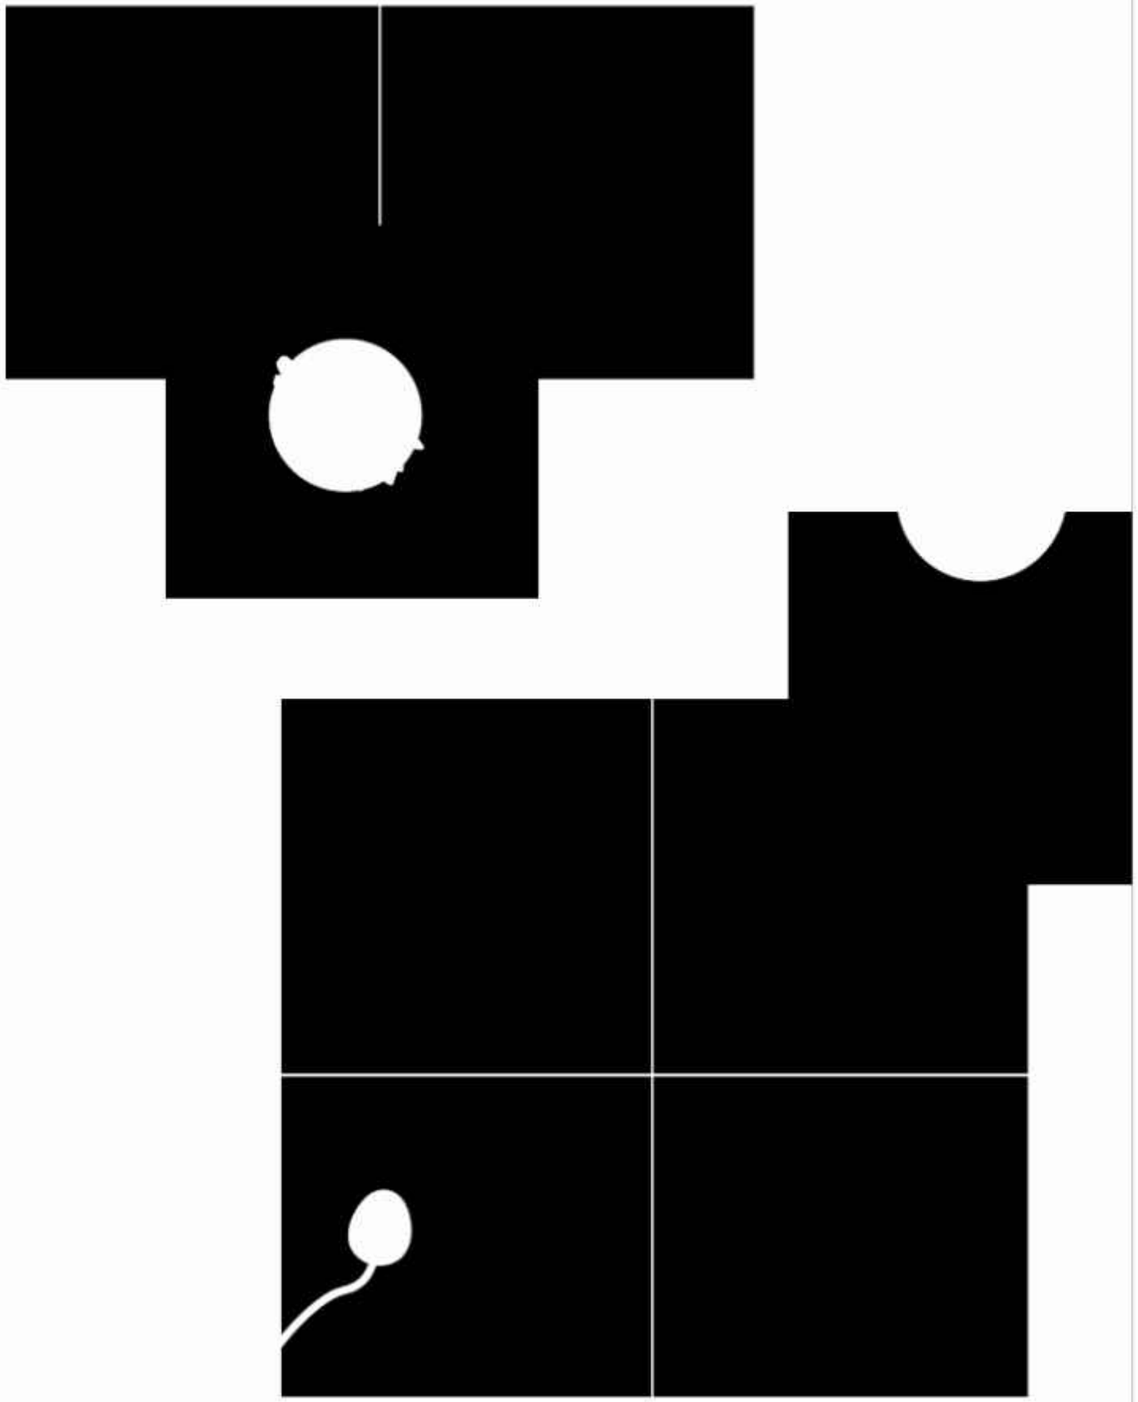

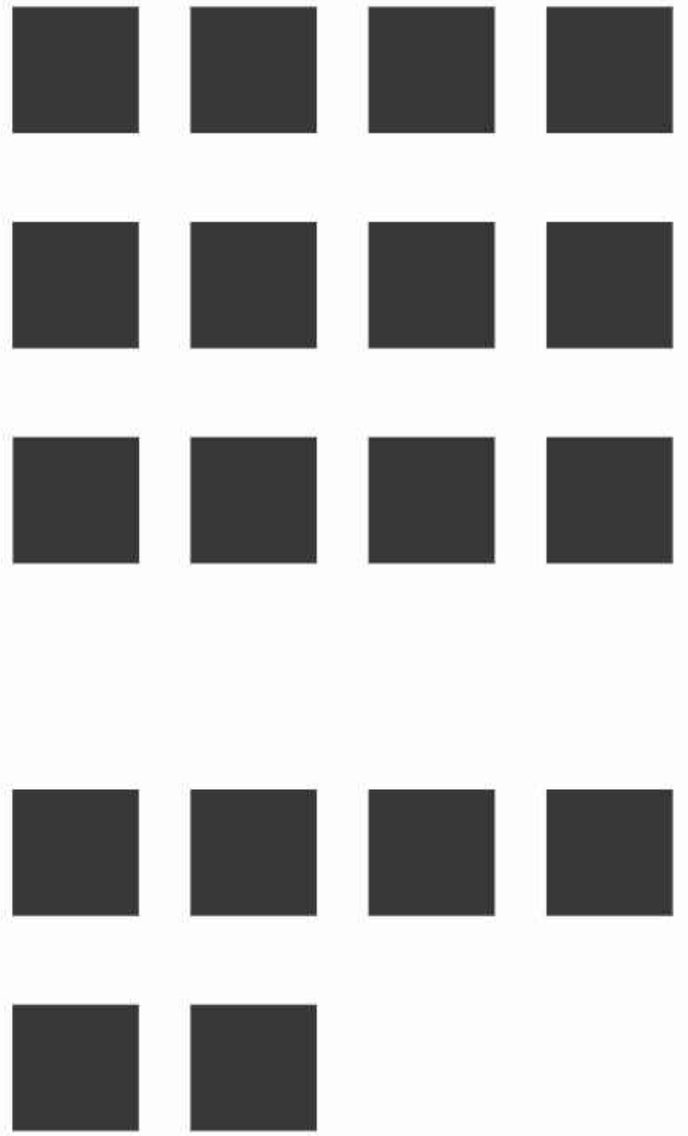

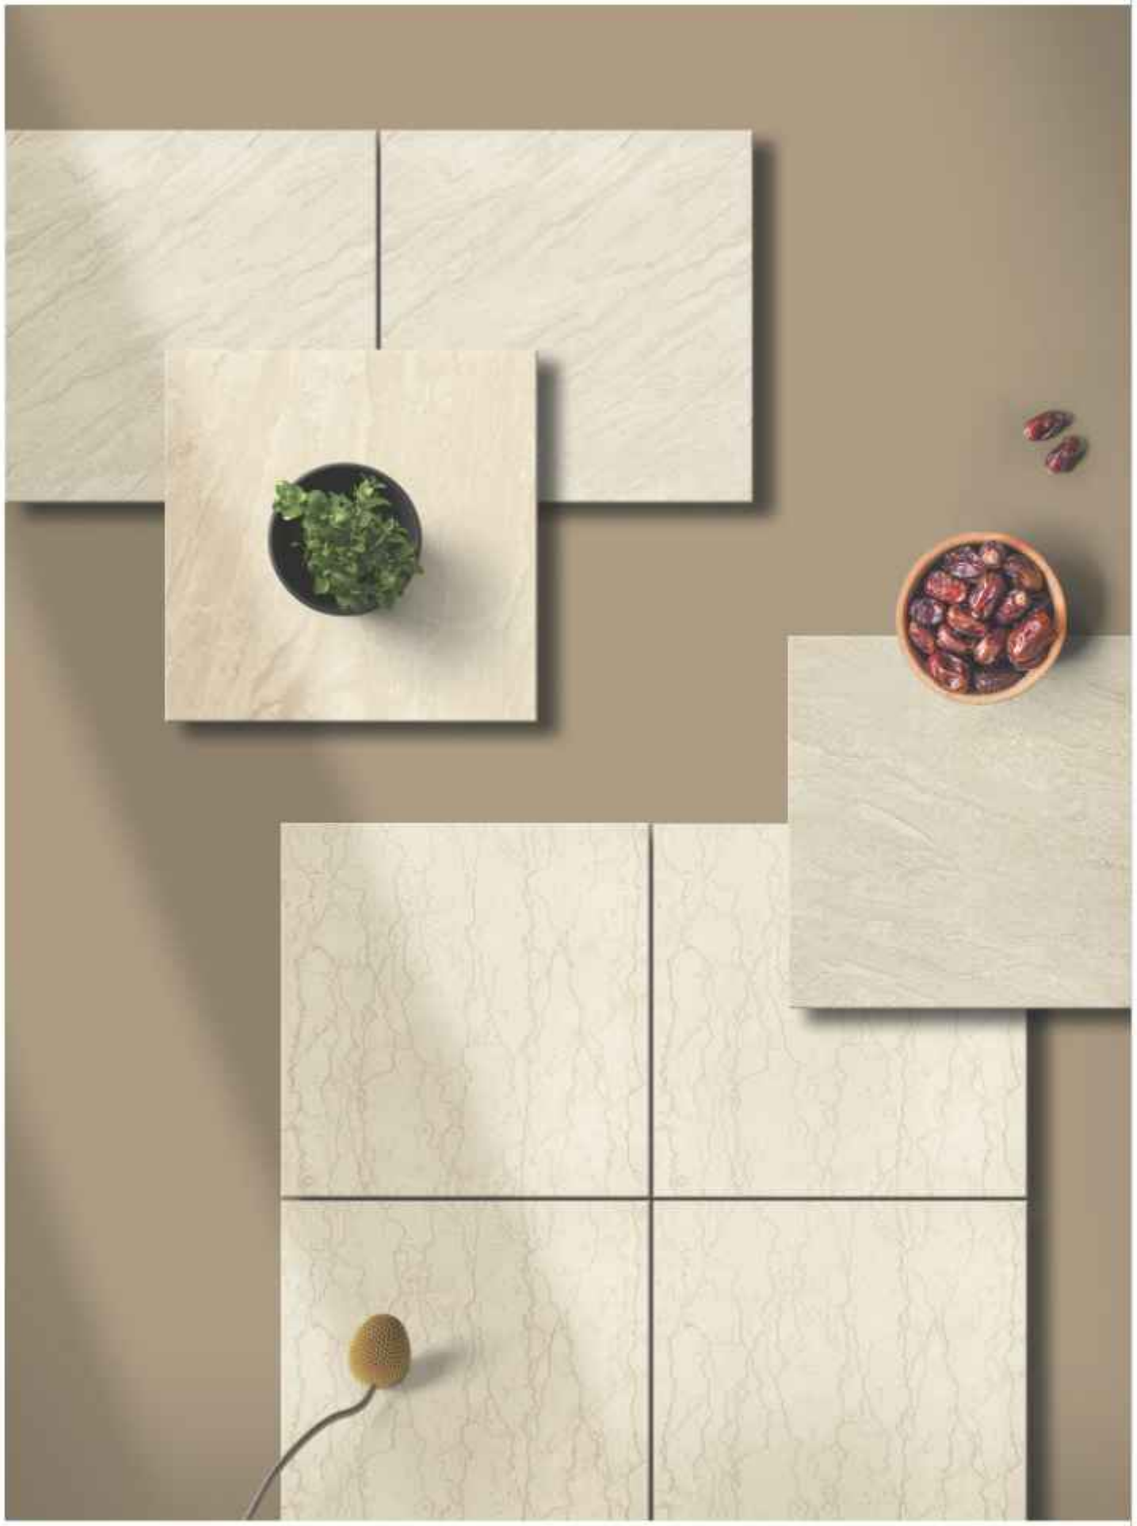

VERVE SERIES

Page No. 10-19

NANO
AVORIO VERVE

NANO
BENITA VERVE

NANO
CAMARO VERVE

NANO
CARINO VERVE

NANO
CORNELIO VERVE

NANO
ELISA VERVE

NANO
LEXUS BEIGE VERVE

NANO
NILSA VERVE

NANO
OASIS VERVE

NANO
SPLASH VERVE

NANO
TENERO VERVE

NANO
TESLA VERVE

GREVITI SERIES

Page No. 20-25

AUGUSTA

CARMINE

ETURA

IVORY


LIGURIA

OPULENT





SOLUBLE SALT

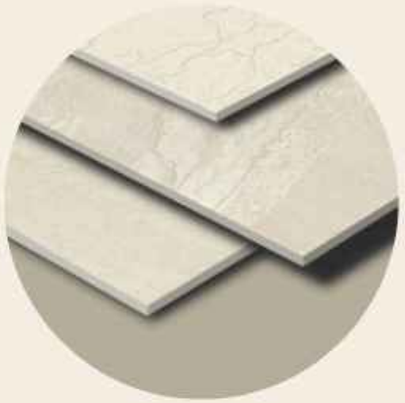

VERVE | GREVITI

The Soluble Salt collection is engineered with a distinctive single-body construction, where a blend of coloured salts and granules is infused into the upper layer before pressing, creating deep, enduring patterns that penetrate the tile's surface. Enhanced with advanced nano-coating technology for superior durability and minimal maintenance requirements. Available in 600x600mm with a Full Polished finish across two distinctive design expressions: Verve and Greviti series, this collection is ideal for high-traffic commercial and residential spaces, ensuring a uniform aesthetic with effortless upkeep.

Nano Tech | Eco Friendly | Anti Stain | Full Polished | Highly Durable



VERVE






NANO BENITA VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°







NANO AVORIO VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°

NANO CAMARO VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°



NANO CARINO VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°

NANO CORNELIO VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°



VERVE








NANO ELISA VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°







NANO LEXUS BEIGE VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

NANO NILSA VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED




NANO OASIS VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED



NANO SPLASH VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED







NANO TENERO VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°

NANO TESLA VERVE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED
NANOVATED

360°








AUGUSTA

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED

360°





CARMINE

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED

ETURA

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED

IVORY

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED

LIGURIA

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED







OPULENT

SOLUBLE SALT VITRIFIED TILES
SIZE: 600x600mm
SURFACE: FULL POLISHED

360°

PACKAGING DETAIL FOR GREVITI COLLECTION				
Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
600x600mm (GREVITI)	7.2 mm	22.30	4	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR GREVITI COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 0.08< E ≤ 3.0% Group B I b	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method
Dimension & Surface Quality				
Length & Width %	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
Thickness %	± 5.00%	± 5.00%	± 4.0%	
Straightness of Side %	± 0.10%	± 0.60%	± 0.10%	
Rectangularity %	± 0.10%	± 0.60%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Edge Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Corner Warpage (%)(Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Surface Quality	Min. 95 % of Tiles will be free from Visible Defects	Min. 95 % of Tiles will be free from Visible Defects	Min. 95 % of Tiles will be free from Visible Defects	
Physical Properties				
Water Absorption	0.08% < E ≤ 3.0 Individual Max. 3.3%	Avg. ≤ 0.5 %, Individual 0.6% max	<0.6% Individual Max 0.8%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avg. 30, Individual 27 Min	Avg. 35, Individual 32 Min	Avg. > 30, Individual 27	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	700	Min 700	Min 700	
Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min 5	IS 13630 Part 13
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	7 X 10 $^{-6}$ K^{-1} Max	Test Method Available	7 X 10 $^{-6}$ K^{-1} Max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 Cycle Min	Required	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 Cycle @ 7.5 Bar Min	Not Applicable	Not Applicable	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-Efficient of Restitution (COR)	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Deep Abrasion Resistant [in mm³]	175 Max	Max 175	Max 175	IS 13630 PART 12/ISO 10454-6
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant (Un-Glazed Tiles)				
Stain Resistant	Min Class 3	Manufacturer to State the Class	Min Class 3	IS 13630 Part 7/ISO 10545-14
Resistant to Household Chemicals	Min Class UB	Min Class UB	Class UB	IS 13630 Part 7/ISO 10545-13
Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if Agreed	Test Method Available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

PACKAGING DETAIL FOR VERVE COLLECTION				
Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
600x600mm (VERVE)	8.0 mm	24.50	4	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR VERVE COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I b	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method
Dimension & Surface Quality				
Length & Width %	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
Thickness %	± 5.00%	± 5.00%	± 4.0%	
Straightness of Side %	± 0.10%	± 0.60%	± 0.10%	
Rectangularity %	± 0.10%	± 0.60%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Edge Curvature (%) (Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Corner Warpage (%)(Max. Deviation)	± 0.50%	± 0.50%	± 0.2 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avr. ≤ 0.08%, Individual Max.0.1%	Avr. ≤ 0.5 %, Individual 0.6% max	<0.08%, Individual Max 0.1%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm²]	Avr. 35, Individual 32 Min	Avr. 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1300	Min 1300	Min 1300	
Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3/ISO-10545-10
Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min 5	IS 13630 Part 13
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	6 X 10 -6 K-1 max	Test method available	6 X 10 -6 K-1 max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 cycle @ 7.5bar min	Not Applicable	Not Applicable	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-Efficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Deep Abrasion Resistant [in mm³]	140 Max	Max 175	Max 140	IS 13630 PART 12/ISO 10454-6
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant (Un-Glazed Tiles)				
Stain Resistant	Min Class 2	Manufacturer to state the class	Min Class 2	IS 13630 Part 7/ISO 10545-14
Resistant to Household Chemicals	Min Class UB	Min Class UB	Class UB	IS 13630 Part 7/ISO 10545-13
Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if agreed	Test method available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code.

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles Used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com