SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

VITRO / FULL BODY / CATALOGUE / JAN 2026



UNIT 03 RANGE VOL 1 | JAN 2026

TECH HOMOGENEA

collection

FULL BODY

600 x 1200mm | 600 x 600mm

SOMANY VITRO

Sculpting
Luxury from

TECH HOMOGENEA
collection

Inspired by stone, nature's testament to strength, permanence, and enduring grace. Built on advanced full-body vitrified construction, each tile ensures complete homogeneity from surface to core, maintaining visual consistency in colour, pattern, and texture even under intensive use. Available in 600x600mm and 600x1200mm formats, the collection expresses four unique design philosophies: Vega delivers consistent granular patterns throughout; Tones Dazel features understated sheen with distinctive light-catching effects; Trento exemplifies maximum uniformity and optimal vividness; Tones Pastel flows with muted neutrals enriched by vibrant accents.

Designed for architects and designers, the collection is ideal for contemporary lobbies, premium outdoor applications, reception areas, and residential or commercial spaces where elevated aesthetics meet functional excellence.

SUBTLE TO STRIKING:
A PALETTE FOR EVERY MOOD

A symphony of hues born from nature's diverse elements—sun-kissed deserts, rugged mountains, deep oceans, serene skies, and golden fields. From soft pastels to dramatic tones, each tile brings warmth and tranquillity. With full-body construction, the beauty runs deep, ensuring consistent colour embedded in every layer.

FULL BODY

collection

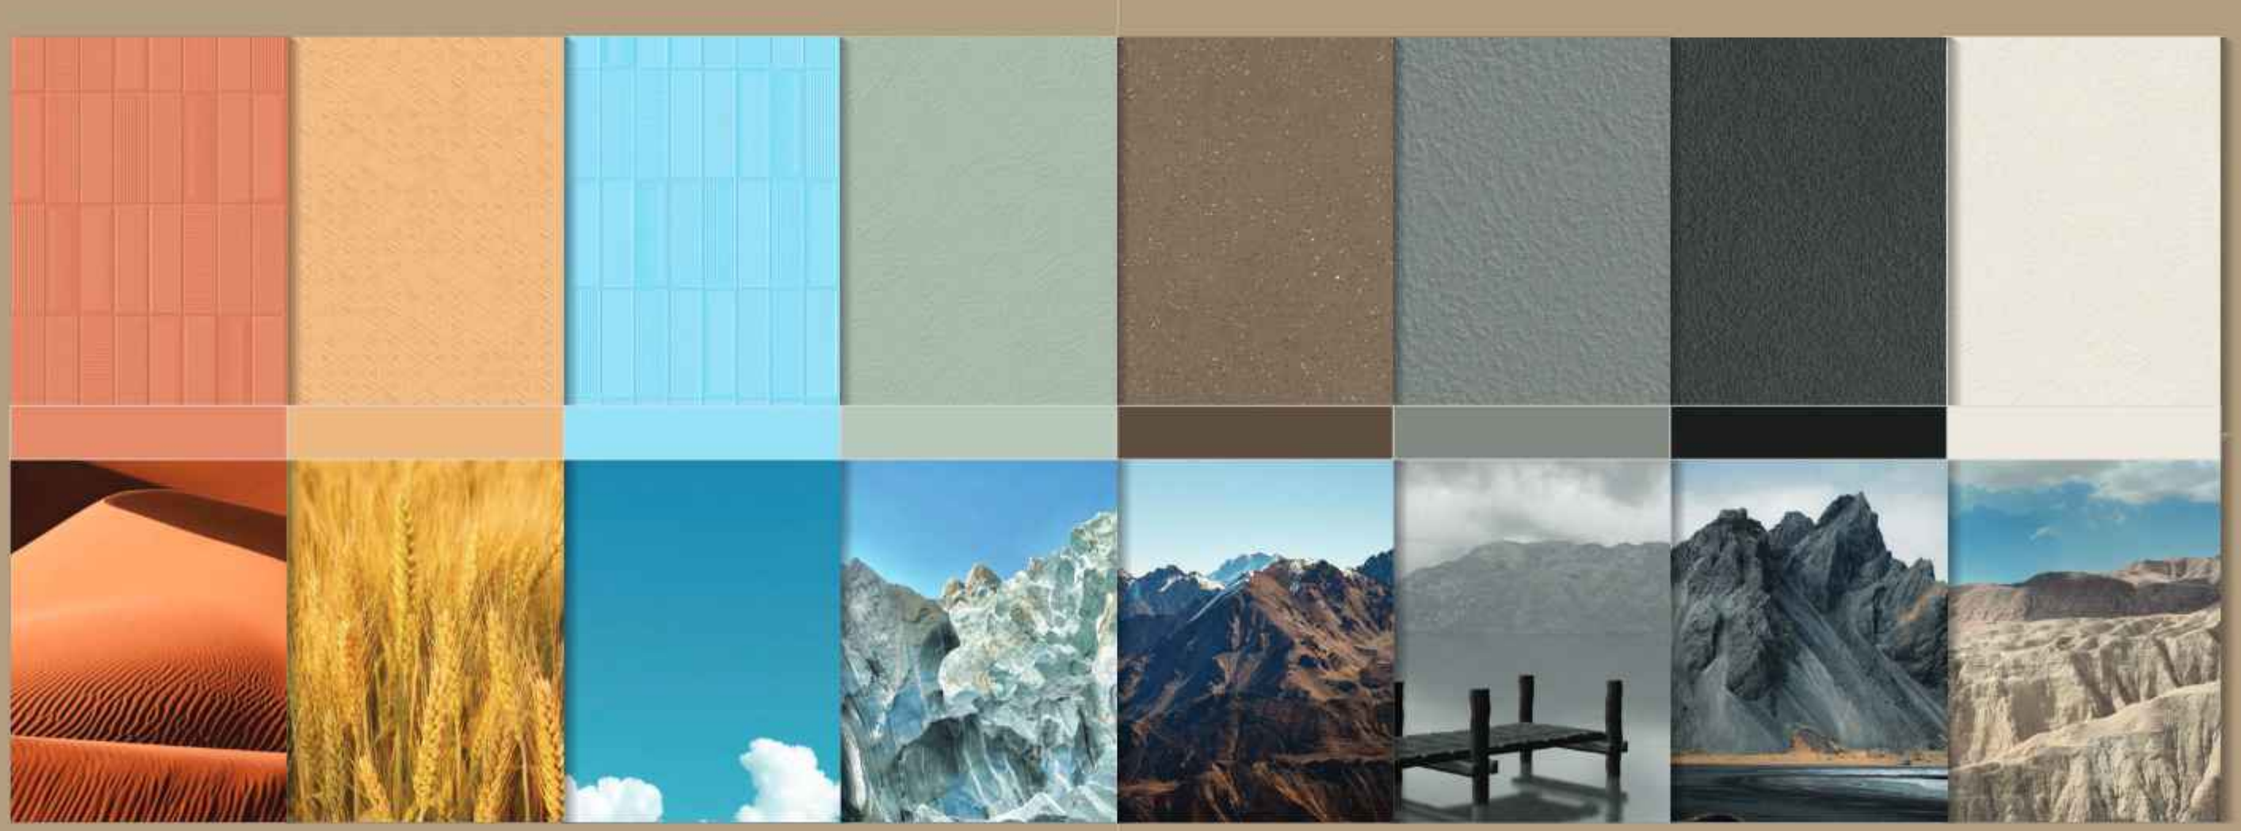



TONES PASTEL
600x1200mm

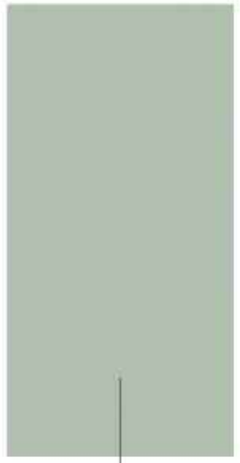

TONES DAZEL
600x1200mm
600x600mm



TRENTO
600x1200mm

VEGA
600x1200mm
600x600mm

TECHNICAL FEATURES



Water Repellent



Blended Smoothness



Non-Reflective



Abrasion and Wear-Resistant



Thermal Resistant



Frost Resistant



Chemical Resistant



Load and Stress-Resistant



Hygienic and Safe



Temperature Resistant

APPLICATION AREAS



Residential Areas



Commercial Areas



Hospitals



Shops and Malls



Hotels and Restaurants



Schools and Colleges



Outdoor Furniture



Public Places

INDEX

TONES PASTEL — 600x1200mm (16 to 43)

TONES BASIL	19	TONES INDIGO BLUE	32
TONES CITRON	20	TONES NEVADA GREY	33
TONES COAL	21	TONES LILAC	36
TONES DESERT SAND	24	TONES ROSEATE	37
TONES EARTH	25	TONES OCHRE	40
TONES HARBOUR GREY	28	TONES SKY BLUE	41
TONES HAZEL NUT	29		

TONES DAZEL — 600x1200mm (44 to 55)

FB DAZEL BLACK	46	FB DAZEL LIGHT GREY	51
FB DAZEL DARK GREY	47	FB DAZEL SUPER WHITE	54
FB DAZEL KOTA GREEN	50		

VEGA — 600x1200mm (56 to 71)

FB VEGA BUTTER	58	FB VEGA DOVE	63
FB VEGA COAL	59	FB VEGA WHITE	66
FB VEGA GRAPHITE	59	FB VEGA GROS STONE GREY	67
FB VEGA CREMA	62	FB VEGA GROSS STONE SUPER WHITE	70

TRENTO — 600x1200mm (72 to 85)

TRENTO BROWN	75	TRENTO GREY	80
TRENTO CREMA	76	TRENTO NERO	81
TRENTO GALAXY BLACK	77	TRENTO STONE SUPER WHITE	85

TONES DAZEL — 600x600mm (88 to 97)

FB DAZEL BLACK	86	FB DAZEL LIGHT GREY	95
FB DAZEL DARK GREY	87	FB DAZEL SUPER WHITE	95
FB DAZEL KOTA GREEN	90		

VEGA — 600x600mm (98 to 112)

FB VEGA BUTTER	100	FB VEGA DOVE	108
FB VEGA COAL	101	FB VEGA GRAPHITE	109
FB VEGA COPPER	104	FB VEGA WHITE	112
FB VEGA CREMA	105		

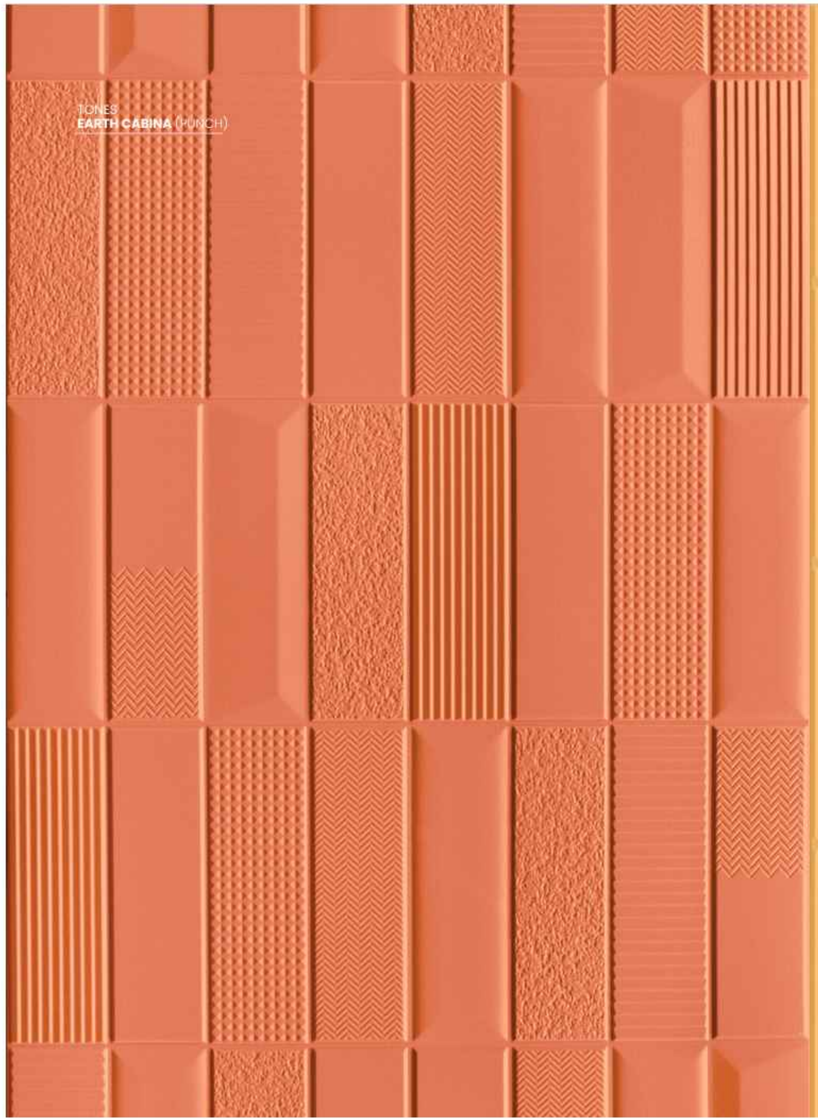
TONES
EARTH CABINA (PUNCH)

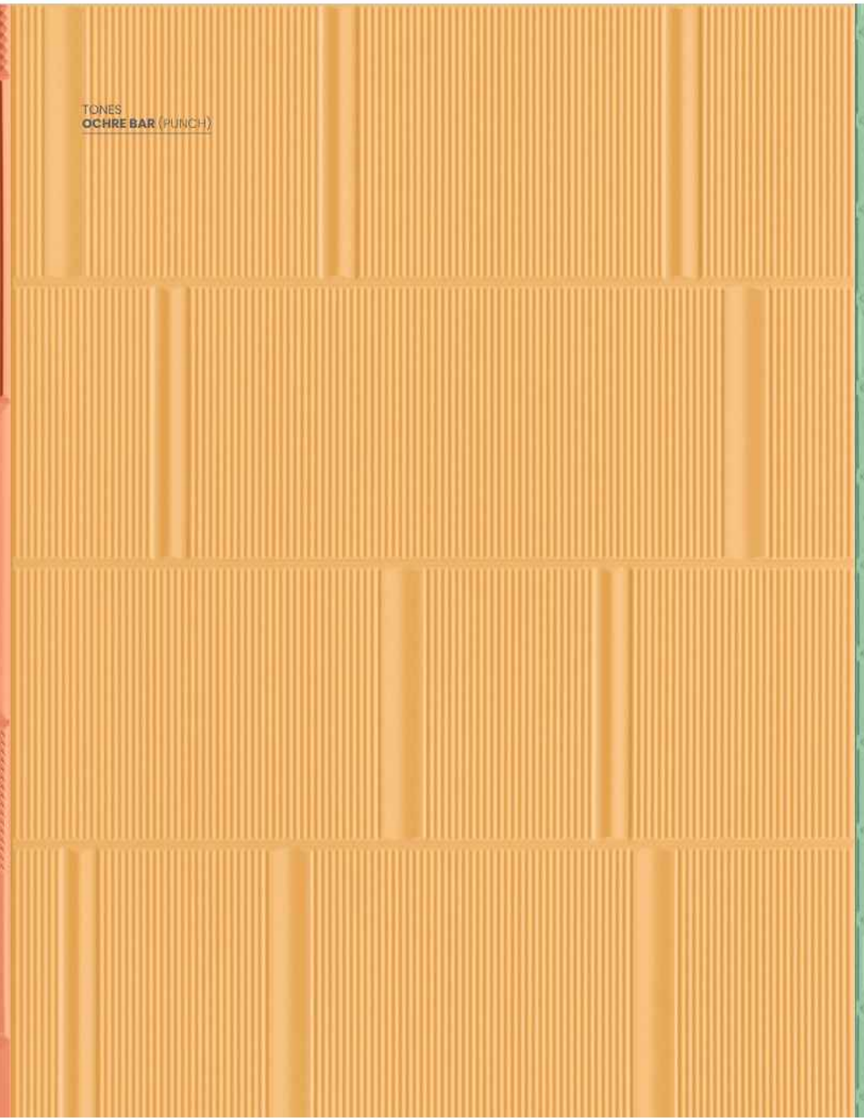
TONES
OCHRE BAR (PUNCH)

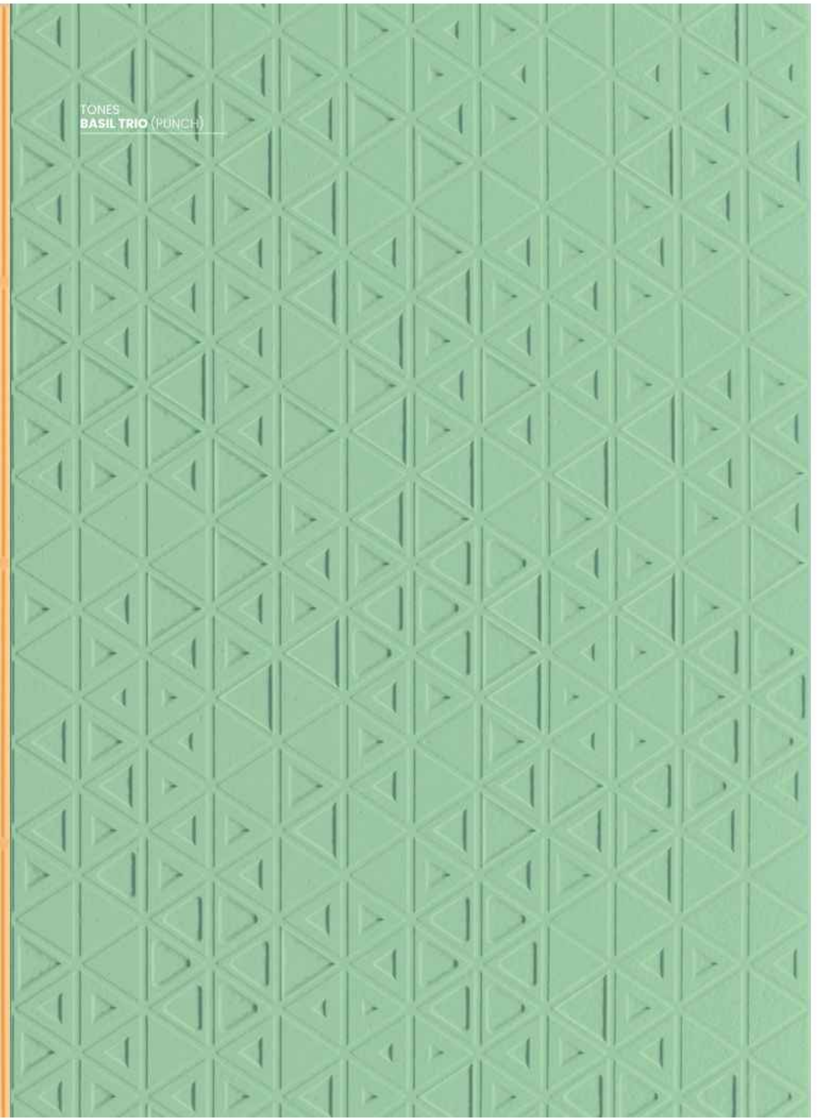
TONES
BASIL TRIO (PUNCH)

FB DAZEL
DARK GREY STONE (PUNCH)

FB VEGA
COAL STONE (PUNCH)

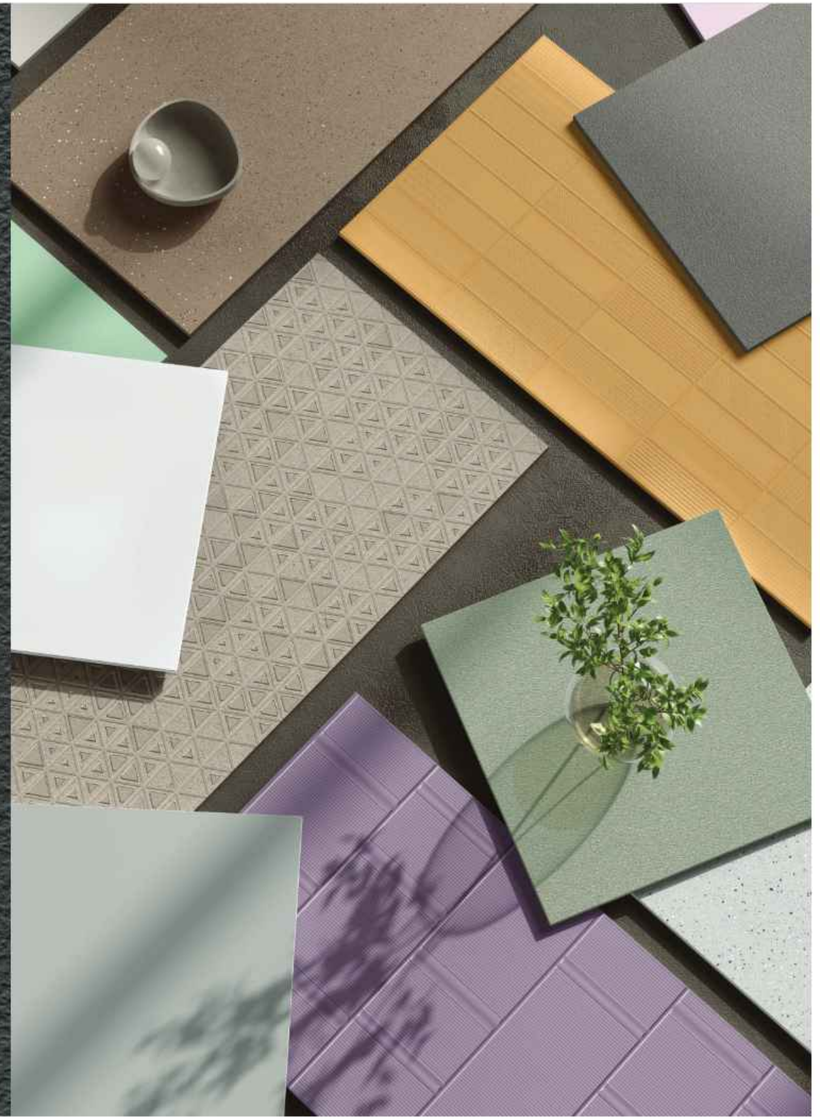



600x 1200mm

FULL BODY VITRIFIED TILES

collection

TONES PASTEL | TONES DAZEL
VEGA | TRENTO

TONES

PASTEL collection

Available Colours

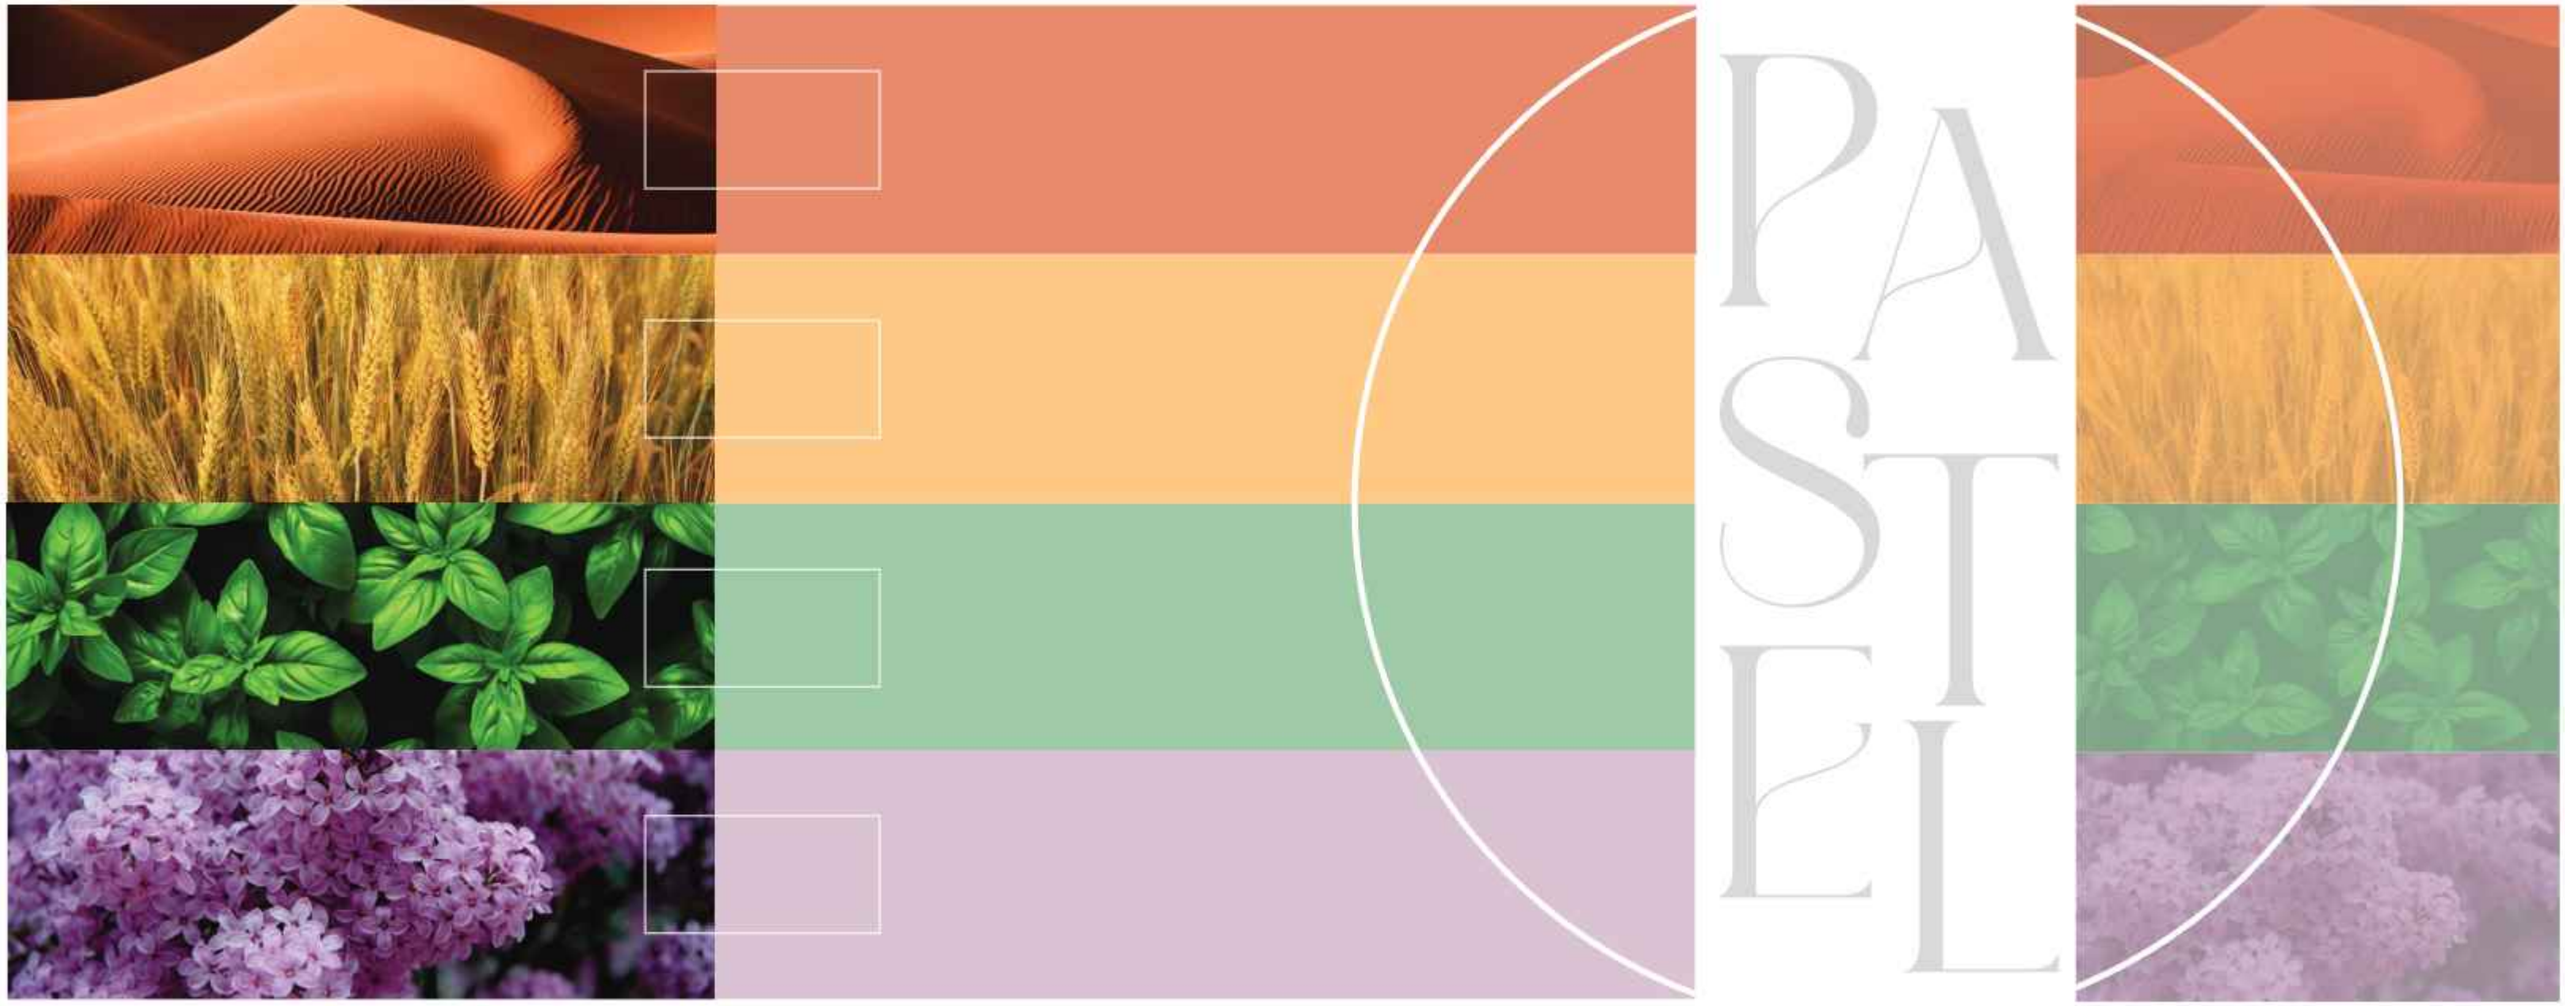

600x1200mm

FULL BODY VITRIFIED TILES



TONES
BASIL CABINA

SIZE:
600x1200mm

THICKNESS:
9.5mm



TONES
BASIL

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

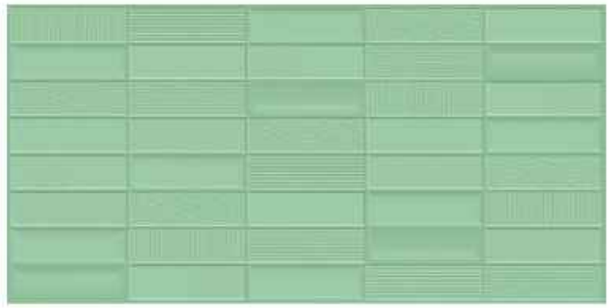

TONES
BASIL CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

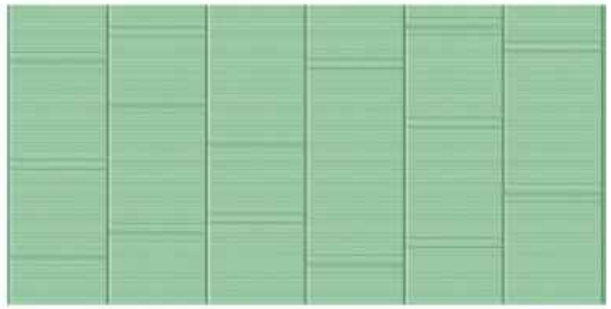

TONES
BASIL BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
BASIL TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

Available Colours

TONES
CITRON

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

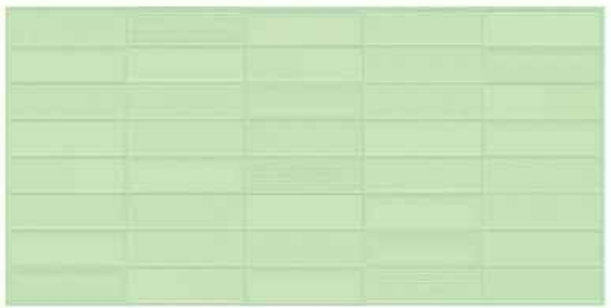

TONES
CITRON CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

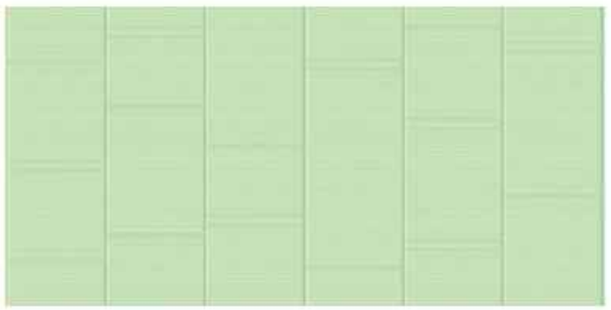

TONES
CITRON BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
CITRON TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
COAL

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

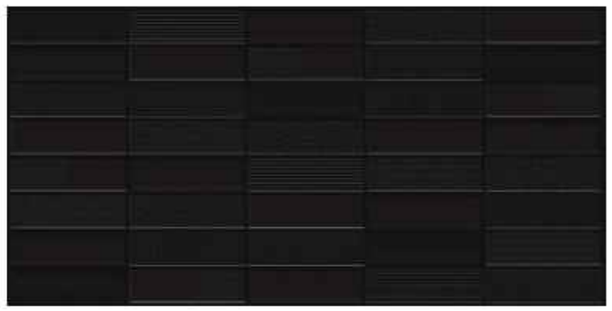

TONES
COAL CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
COAL BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
COAL TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



Available
Colours



TONES
COAL TRIO

SIZE:
600x1200mm

THICKNESS:
9.5mm





TONES
DESERT SAND

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
DESERT SAND CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
DESERT SAND BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

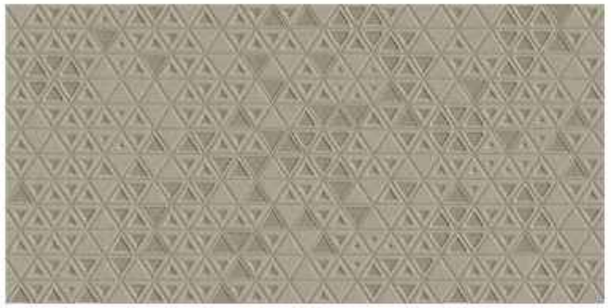

TONES
DESERT SAND TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
EARTH

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

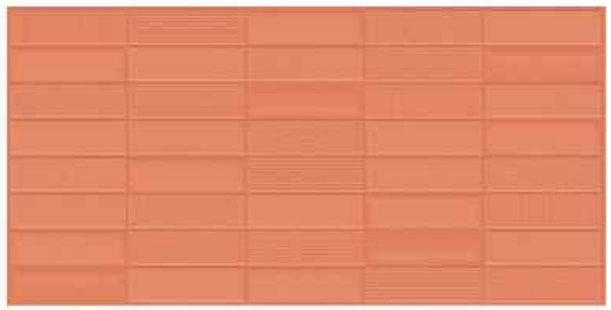

TONES
EARTH CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

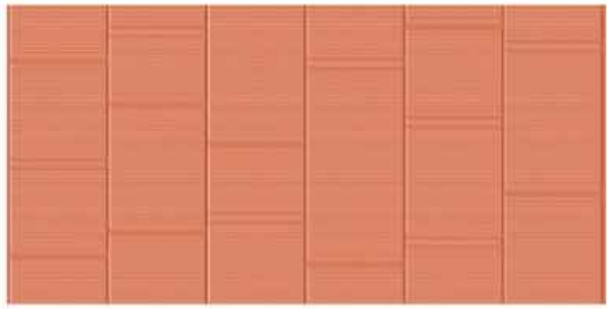

TONES
EARTH BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

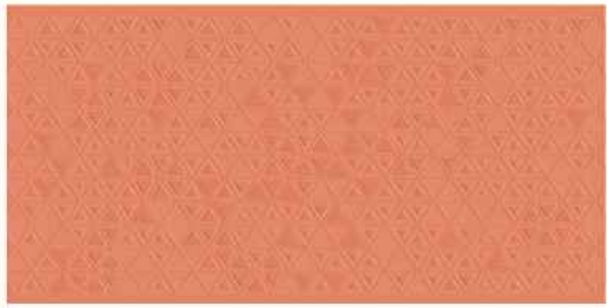

TONES
EARTH TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



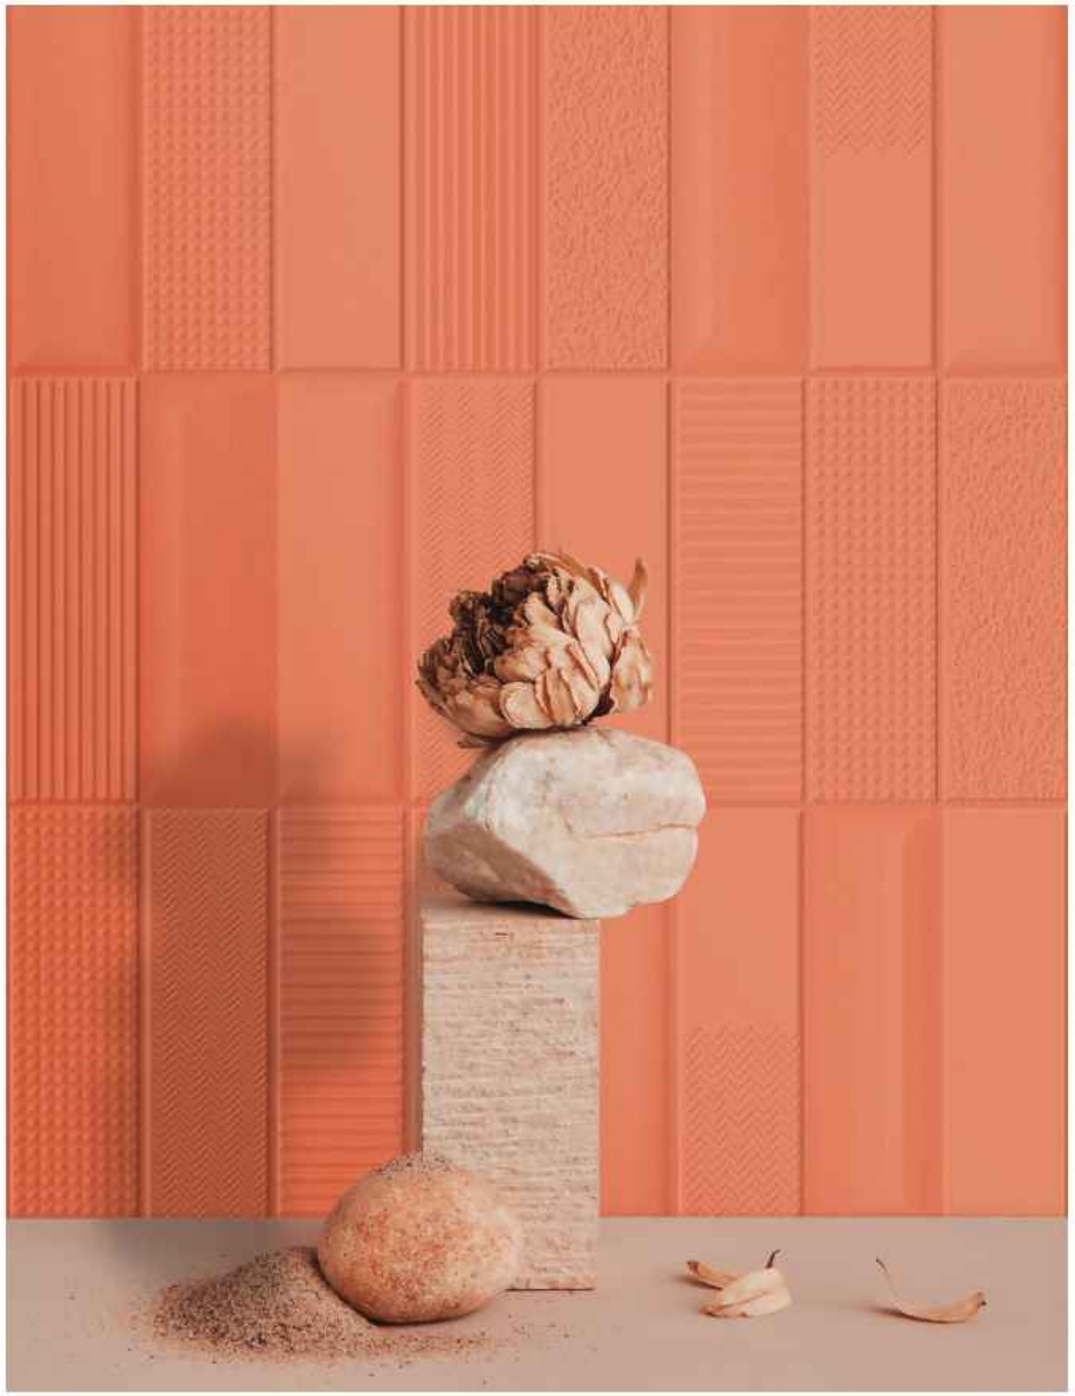

TONES
EARTH CABINA

SIZE:
600x1200mm

THICKNESS:
9.5mm





TONES
HARBOUR GREY

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

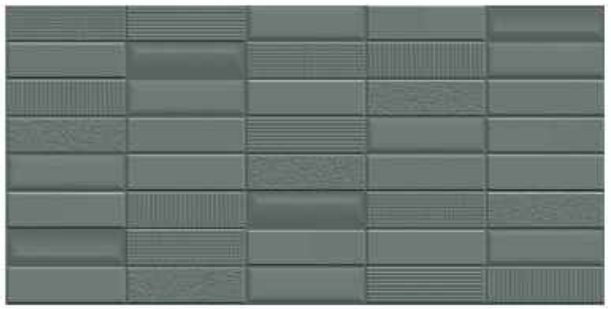

TONES
HARBOUR GREY
CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

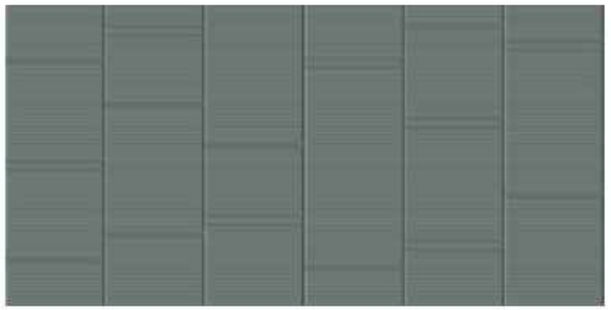

TONES
HARBOUR GREY
BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

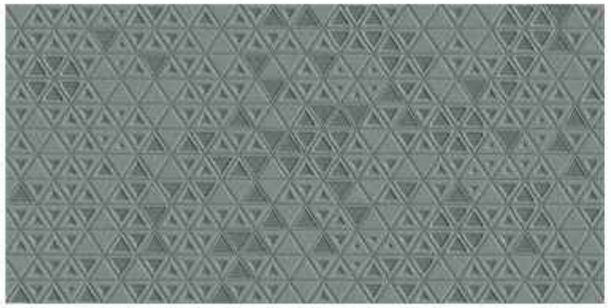

TONES
HARBOUR GREY
TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
HAZEL NUT

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
HAZEL NUT
CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
HAZEL NUT
BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

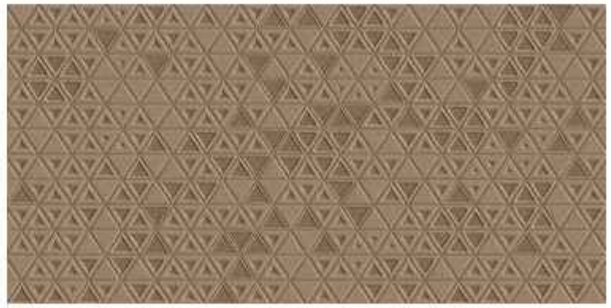

TONES
HAZEL NUT
TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



Available
Colours



TONES
HAZEL NUT
CABINA

SIZE:
600x1200mm

THICKNESS:
9.5mm

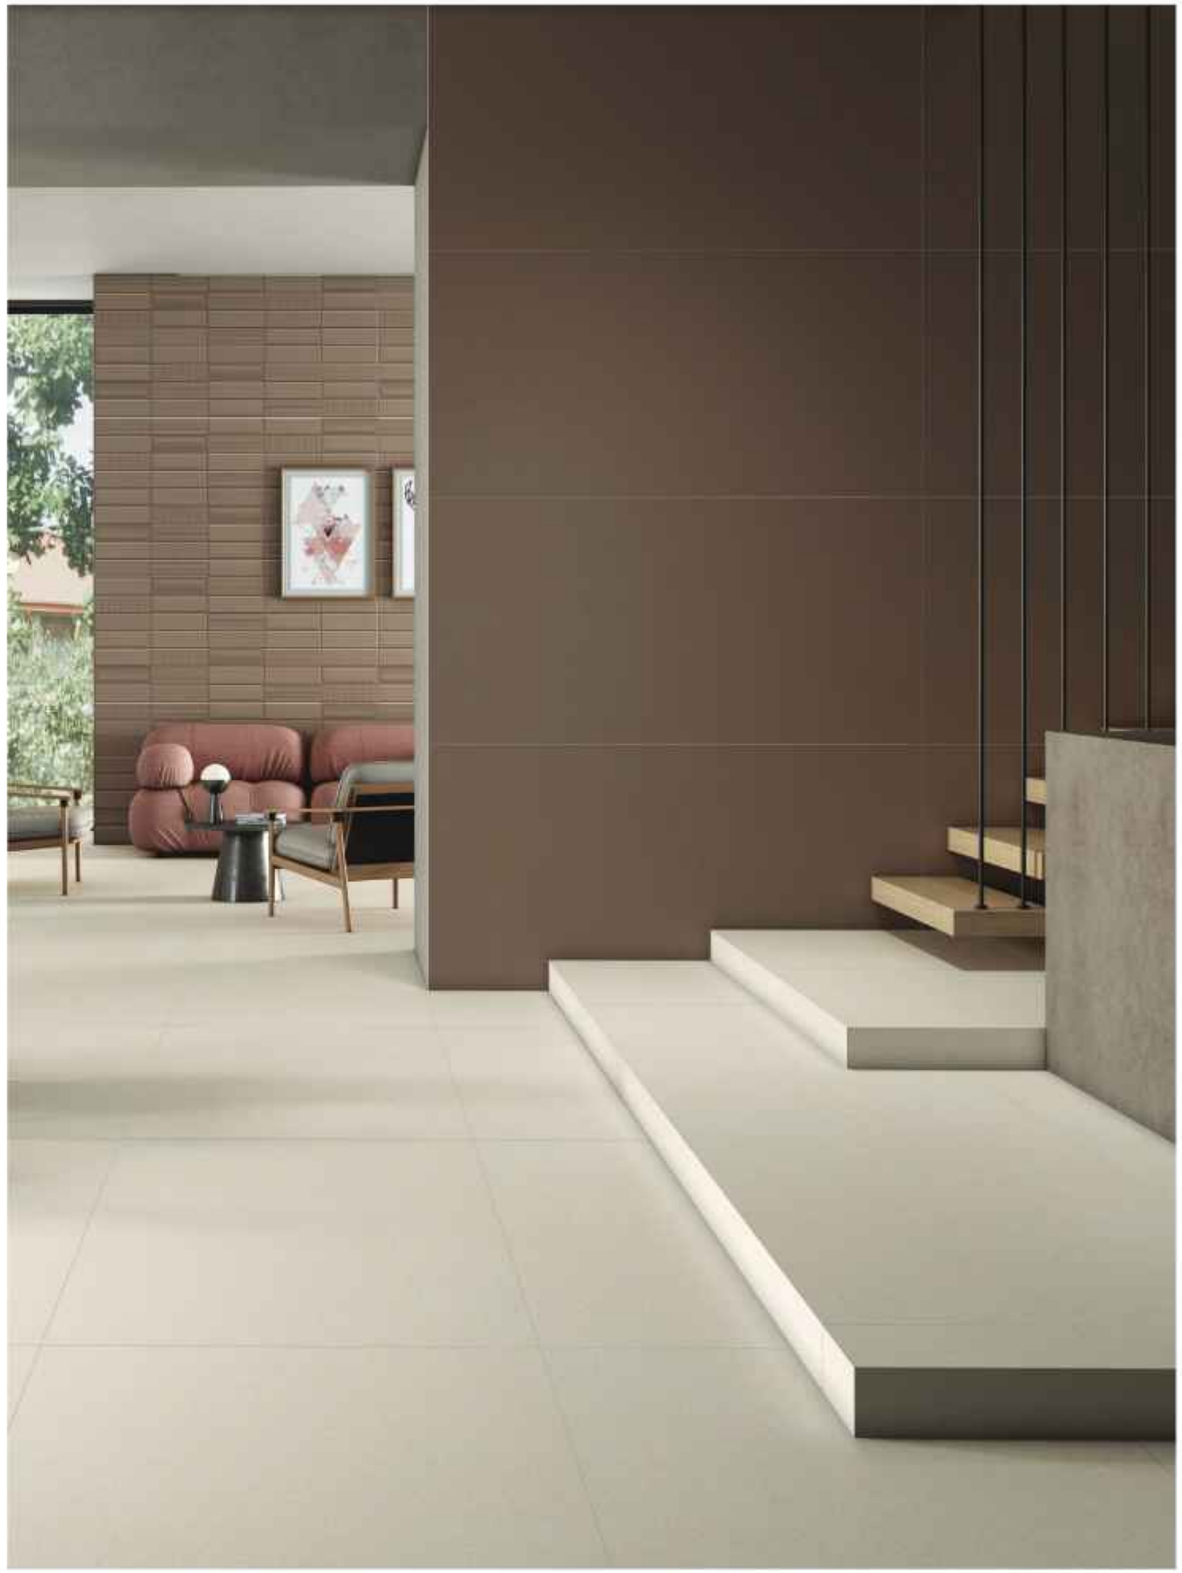



TONES
INDIGO BLUE

THICKNESS:
9,5mm

SURFACE:
SATIN MATT



TONES
INDIGO BLUE
CABINA

THICKNESS:
9,5mm

SURFACE:
SATIN MATT

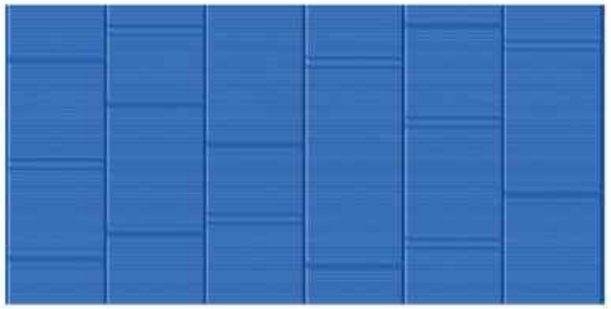

TONES
INDIGO BLUE
BAR

THICKNESS:
9,5mm

SURFACE:
SATIN MATT

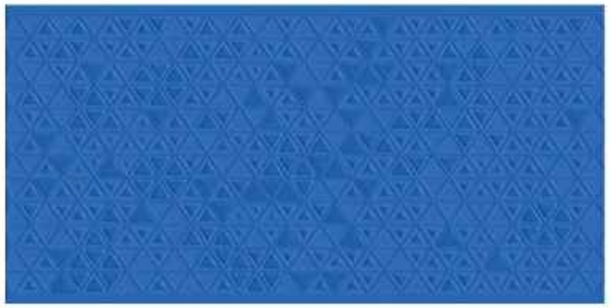

TONES
INDIGO BLUE
TRIO

THICKNESS:
9,5mm

SURFACE:
SATIN MATT



TONES
NEVADA GREY

THICKNESS:
9,5mm

SURFACE:
SATIN MATT



TONES
NEVADA GREY
CABINA

THICKNESS:
9,5mm

SURFACE:
SATIN MATT

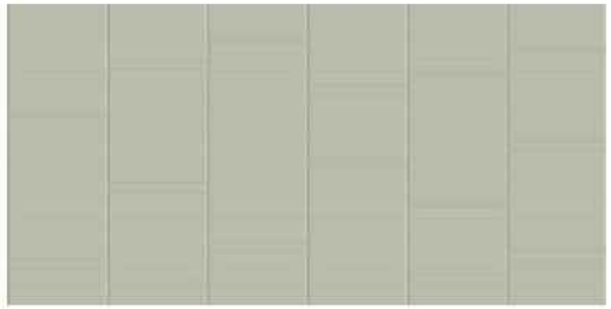

TONES
NEVADA GREY
BAR

THICKNESS:
9,5mm

SURFACE:
SATIN MATT

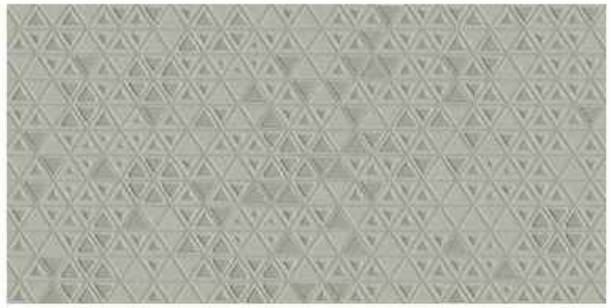

TONES
NEVADA GREY
TRIO

THICKNESS:
9,5mm

SURFACE:
SATIN MATT



Available
Colours



TONES
INDIGO BLUE BAR

SIZE:
600x1200mm

THICKNESS:
9.5mm





TONES
LILAC

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
LILAC CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

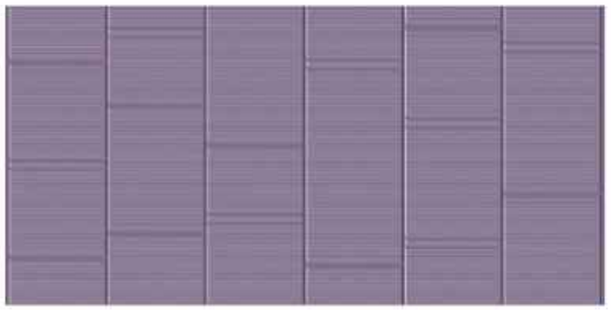

TONES
LILAC BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

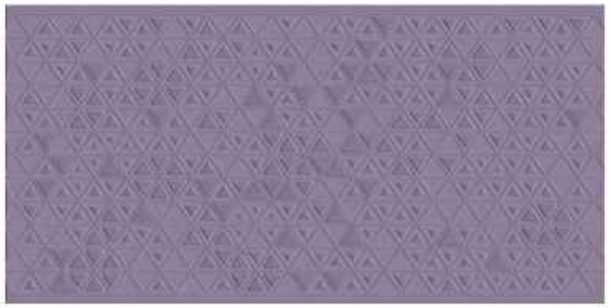

TONES
LILAC TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
ROSEATE

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

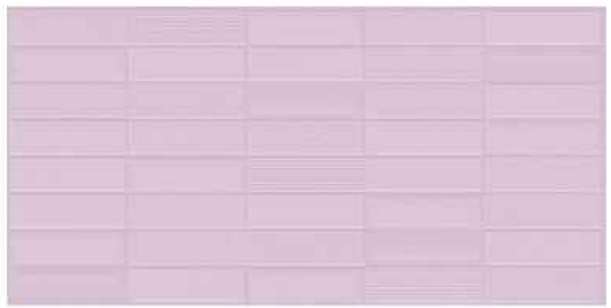

TONES
ROSEATE CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

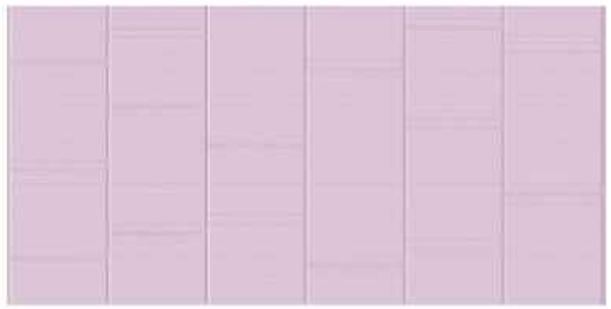

TONES
ROSEATE BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
ROSEATE TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



Available
Colours



TONES
ROSEATE BAR

SIZE:
600x1200mm

THICKNESS:
9.5mm





TONES
OCHRE

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

TONES
OCHRE CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

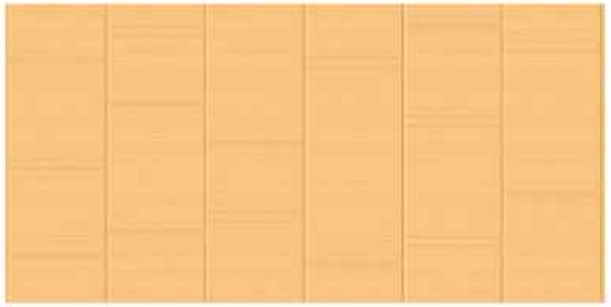

TONES
OCHRE BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
OCHRE TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
SKY BLUE

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

TONES
SKY BLUE CABINA

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

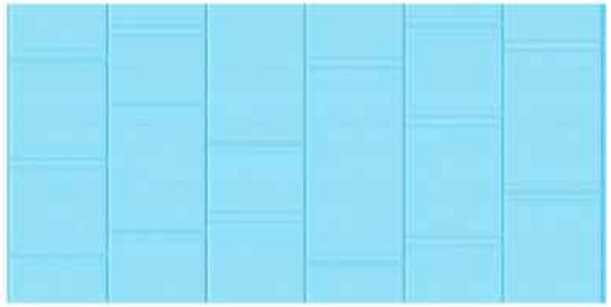

TONES
SKY BLUE BAR

THICKNESS:
9.5mm

SURFACE:
SATIN MATT



TONES
SKY BLUE TRIO

THICKNESS:
9.5mm

SURFACE:
SATIN MATT

Available Colours



TONES
OCHRE CABINA

SIZE:
600x1200mm

THICKNESS:
9.5mm



TONES

DAZEL collection

Available Colours

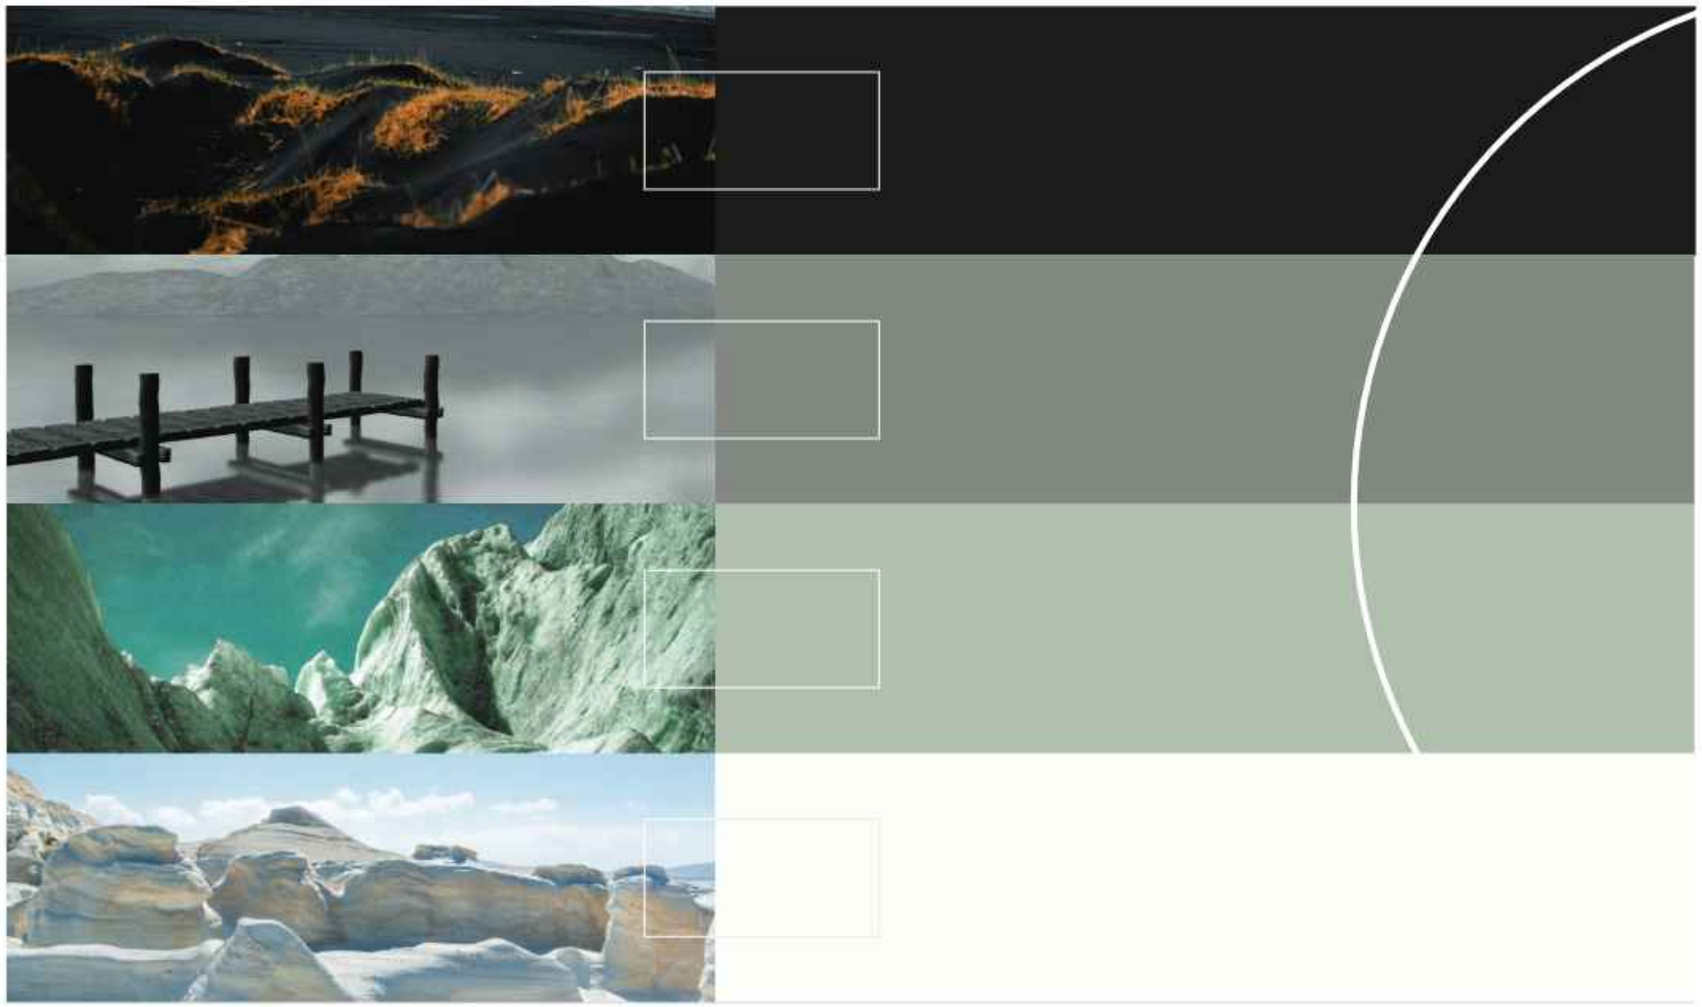

DAZEL



600x1200mm

FULL BODY VITRIFIED TILES



FB DAZEL
BLACK
MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB DAZEL
BLACK STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Stone Punch
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB DAZEL
DARK GREY
MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB DAZEL
DARK GREY
STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH



Available in same design
Size: 600x1200mm | **Finish:** Matt | Stone Punch
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB DAZEL
DARK GREY STONE

SIZE:
600x1200mm

THICKNESS:
8.5mm





FB DAZEL
KOTA GREEN
MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB DAZEL
KOTA GREEN
POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED



FB DAZEL
KOTA GREEN
STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished | Stone Punch
Size: 600x600mm | **Finish:** Matt | Full Polished | Stone Punch



FB DAZEL
LIGHT GREY
MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB DAZEL
LIGHT GREY
POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED



Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished
Size: 600x600mm | **Finish:** Matt | Full Polished



FB DAZEL
KOTA GREEN STONE

SIZE:
600x1200mm

THICKNESS:
8.5mm



FULL BODY VITRIFIED TILES

600x1200mm

FB DAZEL
SUPER WHITE
MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB DAZEL
SUPER WHITE
STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt | Stone Punch
Size: 600x600mm | **Finish:** Matt



VEGA collection

Available Colours



VEGA



600x1200mm

FULL BODY VITRIFIED TILES

FB VEGA
BUTTER MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
BUTTER POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

FB VEGA
BUTTER STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished | Stone Punch
Size: 600x600mm | **Finish:** Matt | Full Polished | Stone Punch

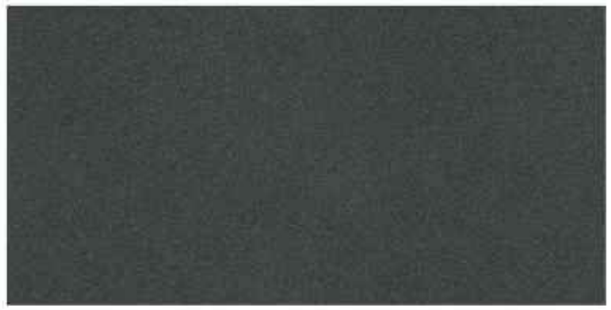

FB VEGA
COAL MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
GRAPHITE MATT

THICKNESS:
8.5mm

SURFACE:
MATT

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB VEGA
BUTTER STONE

SIZE:
600x1200mm

THICKNESS:
8.5mm



FB VEGA
CREMA MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
CREMA POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished
Size: 600x600mm | **Finish:** Matt | Full Polished



FB VEGA
DOVE MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
DOVE POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED



FB VEGA
DOVE STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH



Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished | Stone Punch
Size: 600x600mm | **Finish:** Matt | Full Polished | Stone Punch

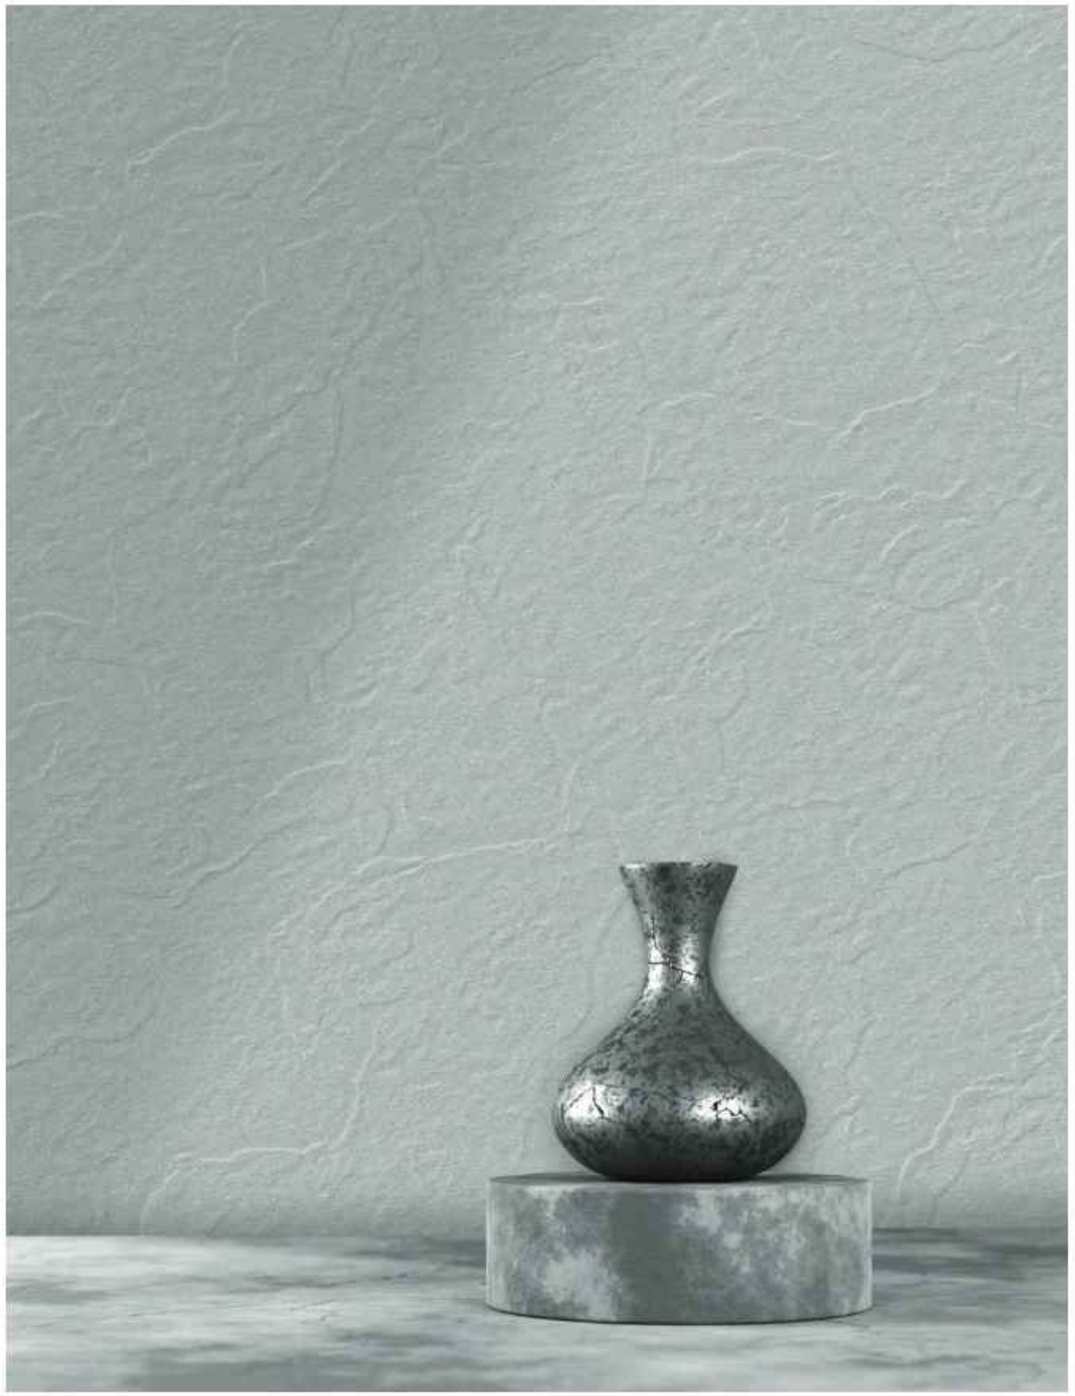

FB VEGA
DOVE STONE

SIZE:
600x1200mm

THICKNESS:
8.5mm



FB VEGA
WHITE MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
WHITE POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished
Size: 600x600mm | **Finish:** Matt | Full Polished



FB VEGA
GROS STONE GREY MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
GROS STONE GREY POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED



Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished



FB VEGA
GROS STONE
GREY MATT

SIZE:
600x1200mm

THICKNESS:
8.5mm



FULL BODY VITRIFIED TILES

600x1200mm

FB VEGA
GROS STONE SUPER WHITE MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
GROS STONE SUPER WHITE POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished



TRENTO collection

Available Colours

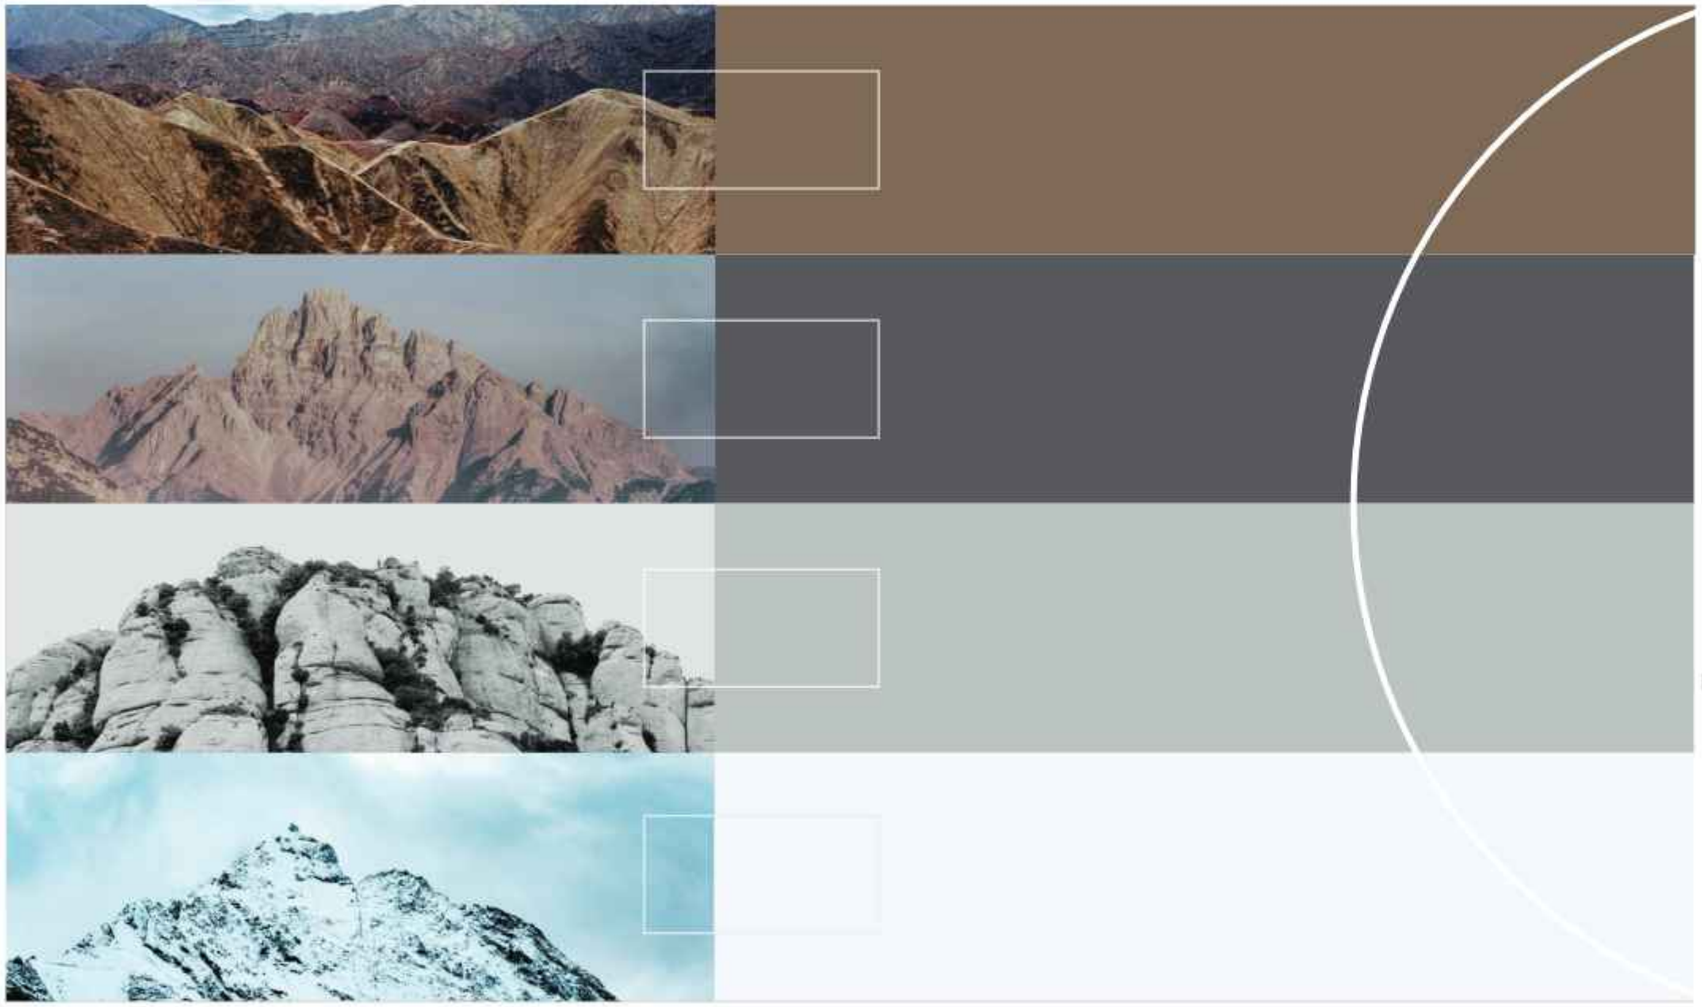

TRENTO

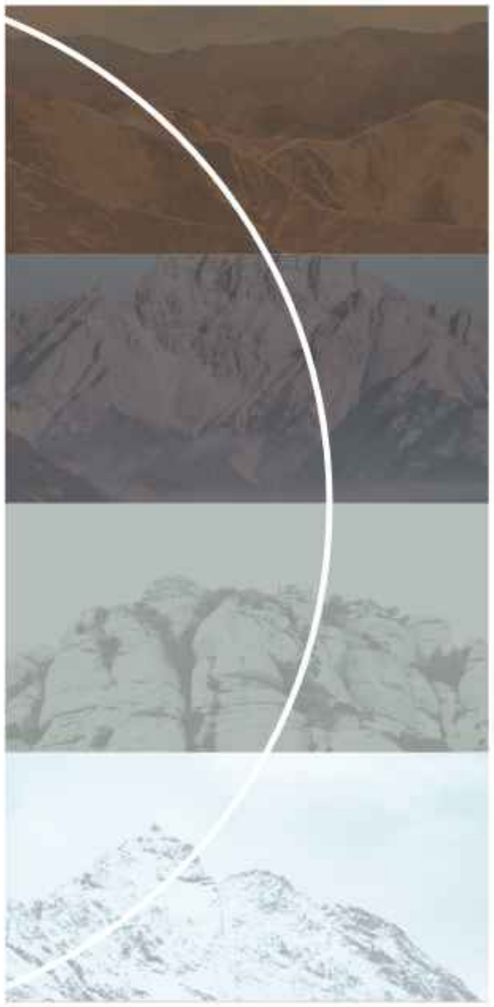

600x1200mm

FULL BODY VITRIFIED TILES



TRENTO
collection

FULL BODY VITRIFIED TILES
600x1200mm

SOMANY
VITRO



TRENTO
BROWN MATT

THICKNESS:
9.2mm

SURFACE:
MATT



TRENTO
BROWN POLISH

THICKNESS:
8.8mm

SURFACE:
FULL POLISHED

Available Colours

TRENTO
BROWN MATT

SIZE:
600x1200mm

THICKNESS:
9.2mm

TRENTO
CREMA MATT

THICKNESS:
9.2mm

SURFACE:
MATT

TRENTO
CREMA POLISH

THICKNESS:
8.8mm

SURFACE:
FULL POLISHED



TRENTO
**GALAXY BLACK
MATT**

THICKNESS:
9.2mm

SURFACE:
MATT



TRENTO
**GALAXY BLACK
POLISH**

THICKNESS:
8.8mm

SURFACE:
FULL POLISHED

Available
Colours

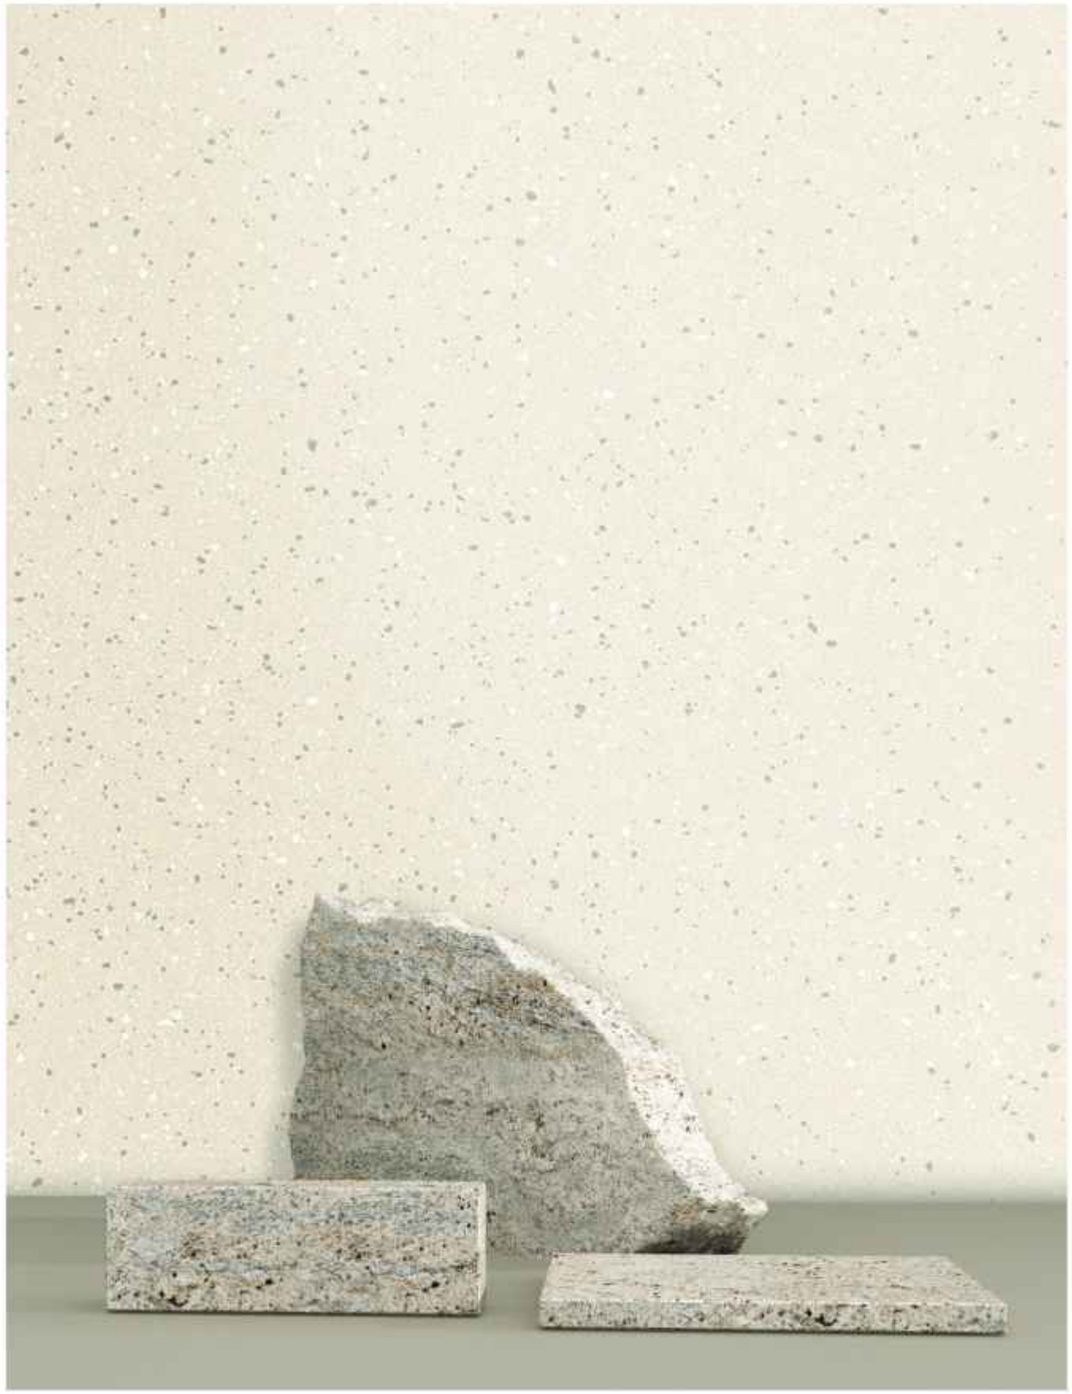

TRENTO
CREMA MATT

SIZE:
600x1200mm

THICKNESS:
9.2mm





TRENTO
GREY MATT

THICKNESS:
9.2mm

SURFACE:
MATT



TRENTO
GREY POLISH

THICKNESS:
8.8mm

SURFACE:
FULL POLISHED



TRENTO
NERO MATT

THICKNESS:
9.2mm

SURFACE:
MATT



TRENTO
NERO POLISH

THICKNESS:
8.8mm

SURFACE:
FULL POLISHED

Available
Colours



TRENTO
NERO MATT

SIZE:
600x1200mm

THICKNESS:
9.2mm





TRENTO
SUPER WHITE
POLISH

SIZE:
600x1200mm

THICKNESS:
8.8mm

TRENTO
SUPER WHITE
MATT

THICKNESS:
9.2mm

SURFACE:
MATT

TRENTO
SUPER WHITE
POLISH

THICKNESS:
8.8mm

SURFACE:
FULL POLISHED

Available
Colours



600x 600mm

FULL BODY VITRIFIED TILES

collection

TONES DAZEL | VEGA

TONES

DAZEL collection

Available Colours

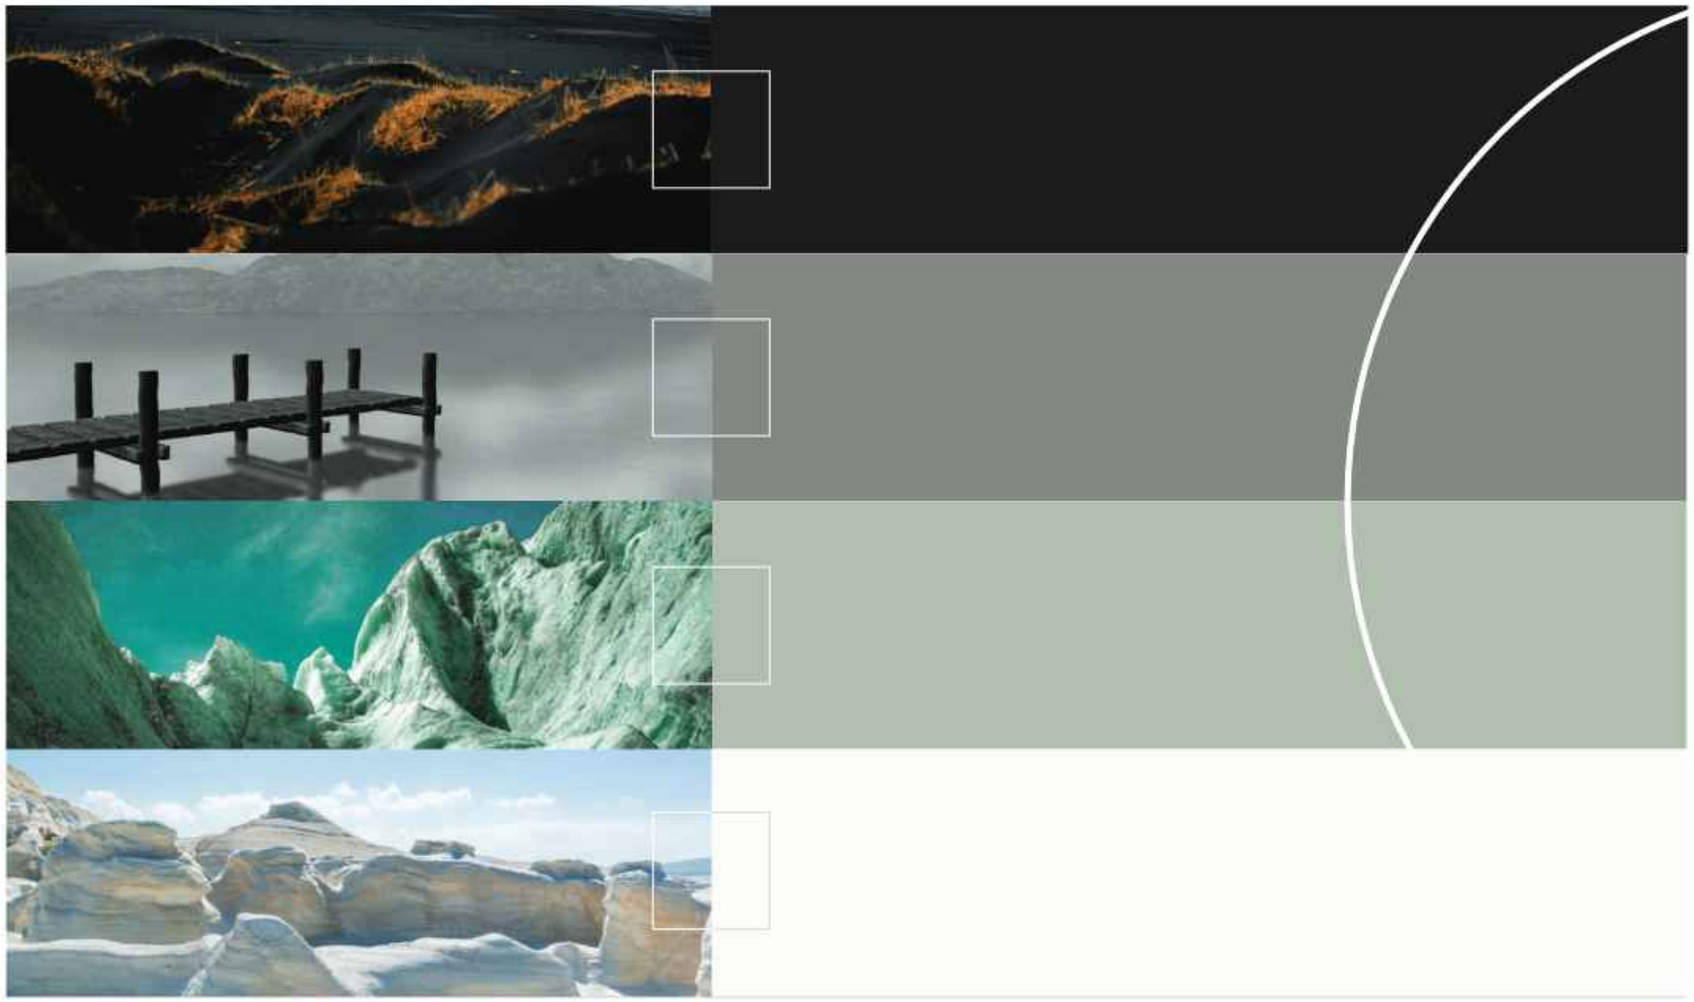



600x600mm

FULL BODY VITRIFIED TILES



FB DAZEL
BLACK MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB DAZEL
BLACK STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Stone Punch
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB DAZEL
DARK GREY
MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB DAZEL
DARK GREY
STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt | Stone Punch
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB DAZEL
DARK GREY STONE

SIZE:
600x600mm

THICKNESS:
8,5mm



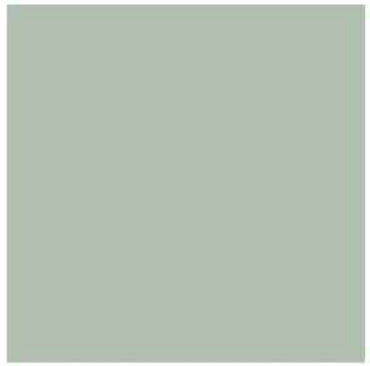

FB DAZEL
KOTA GREEN MATT

THICKNESS:
8.5mm

SURFACE:
MATT

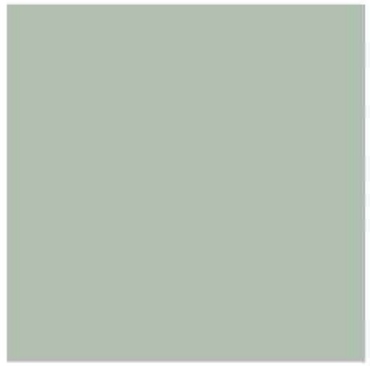

FB DAZEL
KOTA GREEN POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

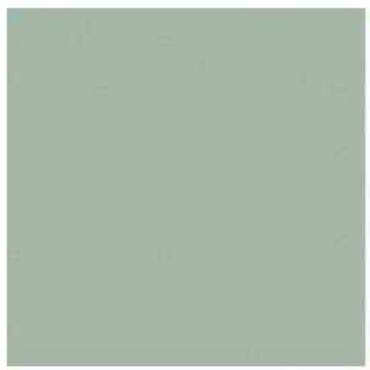

FB DAZEL
KOTA GREEN STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished | Stone Punch
Size: 600x600mm | **Finish:** Matt | Full Polished | Stone Punch

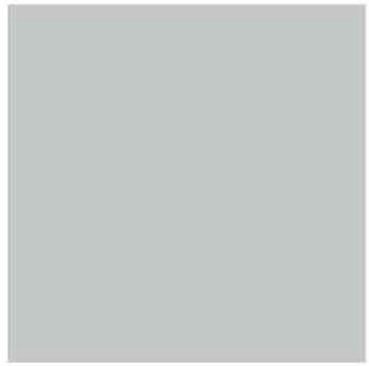

FB DAZEL
LIGHT GREY MATT

THICKNESS:
8.5mm

SURFACE:
MATT

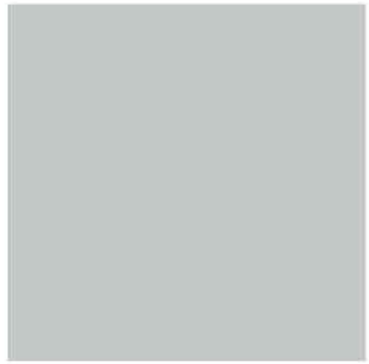

FB DAZEL
LIGHT GREY POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

FB DAZEL
SUPER WHITE MATT

THICKNESS:
8.5mm

SURFACE:
MATT



Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished
Size: 600x600mm | **Finish:** Matt | Full Polished



FB DAZEL
LIGHT GREY MATT

SIZE:
600x600mm

THICKNESS:
8.5mm



VEGA collection

Available Colours





600x600mm

FULL BODY VITRIFIED TILES

FB VEGA
BUTTER MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
BUTTER POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

FB VEGA
BUTTER STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished | Stone Punch
Size: 600x600mm | **Finish:** Matt | Full Polished | Stone Punch



FB VEGA
COAL MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
COAL STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB VEGA
BUTTER MATT

SIZE:
600x600mm

THICKNESS:
8.5mm





FB VEGA
COPPER MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
COPPER POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED



FB VEGA
COPPER STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

FB VEGA
CREMA MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
CREMA POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished
Size: 600x600mm | **Finish:** Matt | Full Polished



FB VEGA
COPPER MATT

SIZE:
600x600mm

THICKNESS:
8.5mm



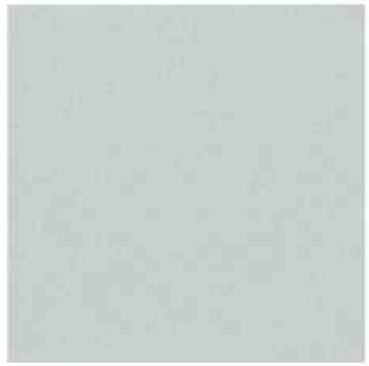

FB VEGA
DOVE MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
DOVE POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED



FB VEGA
DOVE STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished | Stone Punch
Size: 600x600mm | **Finish:** Matt | Full Polished | Stone Punch



FB VEGA
GRAPHITE MATT

THICKNESS:
8.5mm

SURFACE:
MATT



FB VEGA
GRAPHITE STONE

THICKNESS:
8.5mm

SURFACE:
STONE PUNCH



Available in same design
Size: 600x1200mm | **Finish:** Matt
Size: 600x600mm | **Finish:** Matt | Stone Punch



FB VEGA
DOVE STONE

SIZE:
600x600mm

THICKNESS:
8.5mm





FB VEGA
WHITE MATT

SIZE:
600x600mm

THICKNESS:
8.5mm

FB VEGA
WHITE MATT

THICKNESS:
8.5mm

SURFACE:
MATT

FB VEGA
WHITE POLISH

THICKNESS:
8.2mm

SURFACE:
FULL POLISHED

Available Colours

Available in same design
Size: 600x1200mm | **Finish:** Matt | Full Polished
Size: 600x600mm | **Finish:** Matt | Full Polished

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR TONES PASTEL COLLECTION				
Nominal Size	**Thickness**	**Avg. Weight per Carton (Kgs)**	**No. of Tiles Per Carton**	**Coverage area per carton**
600x1200mm	9.5mm	31.0 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.

TECHNICAL SPECIFICATION FOR TONES PASTEL COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.1 %	± 0.5 %	± 0.1 %	IS 13630 Part 1 / ISO 10545-2
ii) Thickness	± 5.0 %	± 5.0 %	± 4.0 %	
iii) Straightness of Side	± 0.1 %	± 0.5 %	± 0.1 %	
iv) Rectangularity	± 0.1 %	± 0.6 %	± 0.1 %	
v) Surface Flatness				
a) Center Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
b) Edge Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
c) Corner Warpage (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av ≤ 0.08%, Individual 0.1 Max	Av ≤ 0.5 %, Individual 0.6 % max	<0.08%, Individual 0.1% Max	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avr 35, Individual 32 Min	Av 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	1300	Min 1300	Min 1300	
iv) Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	Min 6	N. A	5 (for Matt), 4 (for Polished)	IS 13630 Part 13
vi) Deep Abrasion Resistance (in mm³)	Max.140	Max.175	Max.140	IS 13630 PART 12/ISO 10454-6
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100° C	6 X 10 ⁻⁶ K⁻¹ max	Test method available	6 X 10 ⁻⁶ K⁻¹ max	IS 13630 Part 4 / ISO 10545-8
viii) Thermal Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 cycle @ 7.5bar min	Not Applicable	Not Applicable	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant Coefficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14 / ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO 10545-12
C) Chemical Resistant (Un-Glazed Tiles)				
i) Stain Resistant	Min Class 2	Manufacturer to state the class	Min Class-4 (For Matt), Class-2 (For Polished)	IS 13630 Part 8 & ISO 10545-14
ii) Resistant to Household Chemicals	Required if agreed	Min Class UB	Class UA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if agreed	Test method available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR TONES DAZEL COLLECTION				
Nominal Sizes	**Thickness**	**Avg. Weight per Carton (Kgs)**	**No. of Tiles Per Carton**	**Coverage Area Per Carton**
600x1200mm (Full Polished)	9.2mm	27.5 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x1200mm (Matt, Stone Punch)	9.5mm	28.0 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x600mm (Full Polished)	8.2mm	27.5 Kgs. / Box (Appx)	4 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x600mm (Matt, Stone Punch)	8.5mm	28.0 Kgs. / Box (Appx)	4 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.

TECHNICAL SPECIFICATION FOR TONES DAZEL COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.1 %	± 0.5 %	± 0.1 %	IS 13630 Part 1 / ISO 10545-2
ii) Thickness	± 5.0 %	± 5.0 %	± 4.0 %	
iii) Straightness of Side	± 0.1 %	± 0.5 %	± 0.1 %	
iv) Rectangularity	± 0.1 %	± 0.6 %	± 0.1 %	
v) Surface Flatness				
a) Center Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
b) Edge Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
c) Corner Warpage (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av ≤ 0.08%, Individual 0.1 Max	Av ≤ 0.5 %, Individual 0.6 % max	<0.08%, Individual 0.1% Max	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avr 35, Individual 32 Min	Av 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	1300	Min 1300	Min 1300	
iv) Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	Min 5	N. A	5 (for Matt), 4 (for Polished)	IS 13630 Part 13
vi) Deep Abrasion Resistance (in mm³)	Max.140	Max.175	Max.140	IS 13630 PART 12/ISO 10454-6
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100° C	6 X 10 ⁻⁶ K⁻¹ max	Test method available	6 X 10 ⁻⁶ K⁻¹ max	IS 13630 Part 4 / ISO 10545-8
viii) Thermal Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 cycle @ 7.5bar min	Not Applicable	Not Applicable	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant Coefficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14 / ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO 10545-12
C) Chemical Resistant (Un-Glazed Tiles)				
i) Stain Resistant	Min Class 2	Manufacturer to state the class	Min Class-4 (For Matt), Class-2 (For Polished)	IS 13630 Part 8 & ISO 10545-14
ii) Resistant to Household Chemicals	Required if agreed	Min Class UB	Class UA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if agreed	Test method available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR VEGA COLLECTION				
Nominal Sizes	**Thickness**	**Avg. Weight per Carton (Kgs)**	**No. of Tiles Per Carton**	**Coverage Area Per Carton**
600x1200mm (Full Polished)	8.2mm	27.2 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x1200mm (Matt, Stone Punch)	8.5mm	27.7 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x600mm (Full Polished)	8.2mm	27.2 Kgs. / Box (Appx)	**4 Pcs.**	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x600mm (Matt, Stone Punch)	8.5mm	27.7 Kgs. / Box (Appx)	**4 Pcs.**	1.44 Sq. Mtr / 15.50 Sq. Ft.

TECHNICAL SPECIFICATION FOR VEGA COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.1 %	± 0.5 %	± 0.1 %	IS 13630 Part 1 / ISO 10545-2
ii) Thickness	± 5.0 %	± 5.0 %	± 4.0 %	
iii) Straightness of Side	± 0.1 %	± 0.5 %	± 0.1 %	
iv) Rectangularity	± 0.1 %	± 0.6 %	± 0.1 %	
v) Surface Flatness				
a) Center Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
b) Edge Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
c) Corner Warpage (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av ≤ 0.08%, Individual 0.1 Max	Av ≤ 0.5 %, Individual 0.6 % max	<0.08%, Individual 0.1% Max	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avr 35, Individual 32 Min	Av 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	**1300**	Min 1300	Min 1300	
iv) Moisture Expansion in mm/m	**0.02**	Test method available	**0.02**	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	**Min 5**	N. A	5 (for Matt), 4 (for Polished)	IS 13630 Part 13
vi) Deep Abrasion Resistance (in mm³)	Max.140	Max.175	Max.140	IS 13630 PART 12/ISO 10454-6
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100° C	8 X 10 ⁻⁶ K⁻¹ max	Test method available	6 X 10 ⁻⁶ K⁻¹ max	IS 13630 Part 4 / ISO 10545-8
viii) Thermal Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 cycle @ 7.5bar min	Not Applicable	Not Applicable	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant Coefficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14 / ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO 10545-12
C) Chemical Resistant (Un-Glazed Tiles)				
i) Stain Resistant	Min Class 2	Manufacturer to state the class	Min Class-4 (For Matt), Class-2 (For Polished)	IS 13630 Part 8 & ISO 10545-14
ii) Resistant to Household Chemicals	Required if agreed	Min Class UB	Class UA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if agreed	Test method available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR TRENTO COLLECTION				
Nominal Sizes	**Thickness**	**Avg. Weight per Carton (Kgs)**	**No. of Tiles Per Carton**	**Coverage Area Per Carton**
600x1200mm (Full Polished)	8.8mm	29.0 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.
600x1200mm (Matt)	9.2mm	30.0 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.

TECHNICAL SPECIFICATION FOR TRENTO COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.1 %	± 0.5 %	± 0.1 %	IS 13630 Part 1 / ISO 10545-2
ii) Thickness	± 5.0 %	± 5.0 %	± 4.0 %	
iii) Straightness of Side	± 0.1 %	± 0.5 %	± 0.1 %	
iv) Rectangularity	± 0.1 %	± 0.6 %	± 0.1 %	
v) Surface Flatness				
a) Center Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
b) Edge Curvature (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
c) Corner Warpage (%) (Max.Deviation)	± 0.5 %	± 0.5 %	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av ≤ 0.08%, Individual 0.1 Max	Av ≤ 0.5 %, Individual 0.6 % max	<0.08%, Individual 0.1% Max	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avr 35, Individual 32 Min	Av 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	**1300**	Min 1300	Min 1300	
iv) Moisture Expansion in mm/m	**0.02**	Test method available	**0.02**	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	**Min 5**	N. A	5 (for Matt), 4 (for Polished)	IS 13630 Part 13
vi) Deep Abrasion Resistance (in mm³)	Max.140	Max.175	Max.140	IS 13630 PART 12/ISO 10454-6
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100° C	8 X 10 ⁻⁶ K⁻¹ max	Test method available	6 X 10 ⁻⁶ K⁻¹ max	IS 13630 Part 4 / ISO 10545-8
viii) Thermal Resistant	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 cycle @ 7.5bar min	Not Applicable	Not Applicable	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant Coefficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14 / ISO 10545-5
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO 10545-12
C) Chemical Resistant (Un-Glazed Tiles)				
i) Stain Resistant	Min Class 2	Manufacturer to state the class	Min Class-4 (For Matt), Class-2 (For Polished)	IS 13630 Part 8 & ISO 10545-14
ii) Resistant to Household Chemicals	Required if agreed	Min Class UB	Class UA	IS 13630 Part 8 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With Exception of Hydrofluoric Acid and its Compounds)	Required if agreed	Test method available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces — walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Lysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com