SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481, Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

VITRO / DUNE / CATALOGUE / OCT 2025



UNIT 03 TONES RANGE VOL 1 | OCT 2025

DUNE
collection

600 x 1200mm | 600 x 600mm

SOMANY VITRO













1 SURFACE
2 SIZES
8 SHADES

Subtle Sophistication in Every Surface

Designed for understated elegance, the Dune collection brings sophisticated subtlety to modern architectural spaces through a curated palette of eight muted and refined colours. Its full-body construction ensures uniform colour distribution and structural integrity throughout the tile thickness, delivering enduring visual consistency. Available in 600x600mm and 600x1200mm sizes with 8.5mm thickness, premium Matt offers enhanced tactility and minimal glare. This range combines sophisticated aesthetics with robust performance, making it perfectly suited for contemporary lobbies, premium outdoor applications, and luxury interiors across residential and commercial environments.

DUNE COLLECTION

FB DUNE WHITE MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt



FB DUNE CREMA MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt



FB DUNE LIGHT GREY MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt



FB DUNE DARK GREY MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt



Wall & Floor: **FB DUNE CREMA MATT & DARK GREY MATT** • Dune Collection

DUNE COLLECTION


FB DUNE TUSK MATT

SIZES & SURFACES

600x1200mm
Matt | Full Polished

600x600mm
Matt | Full Polished

Full Polished

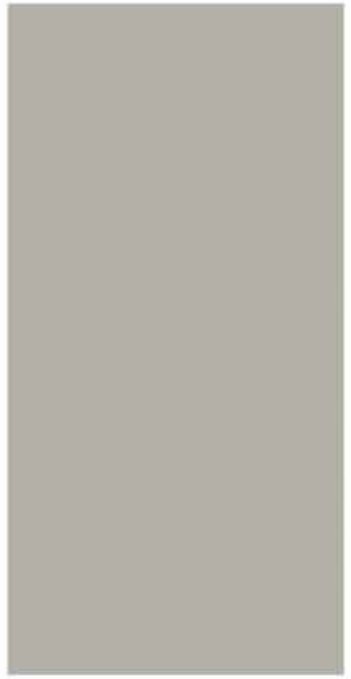


FB DUNE MUSHROOM MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt

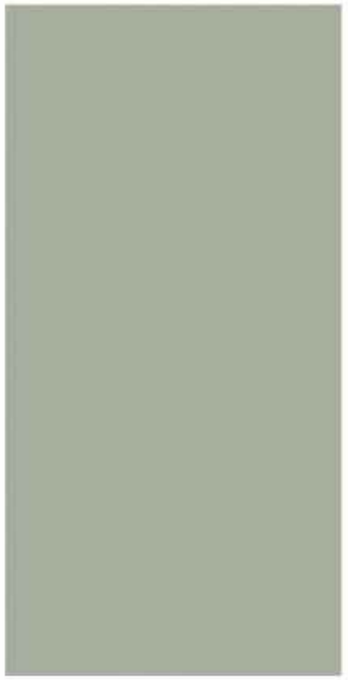


FB DUNE KOTA GREEN MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt

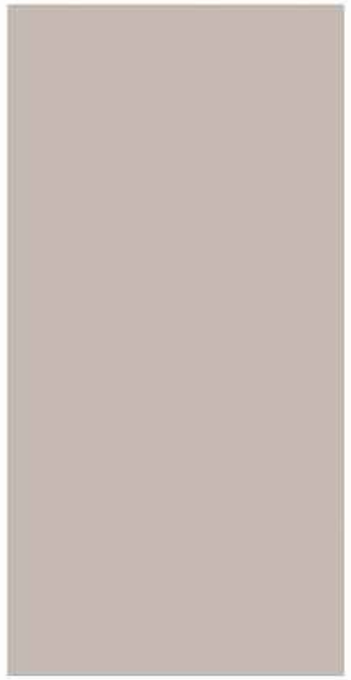


FB DUNE BROWN MATT

SIZES & SURFACE

600x1200mm
Matt

600x600mm
Matt

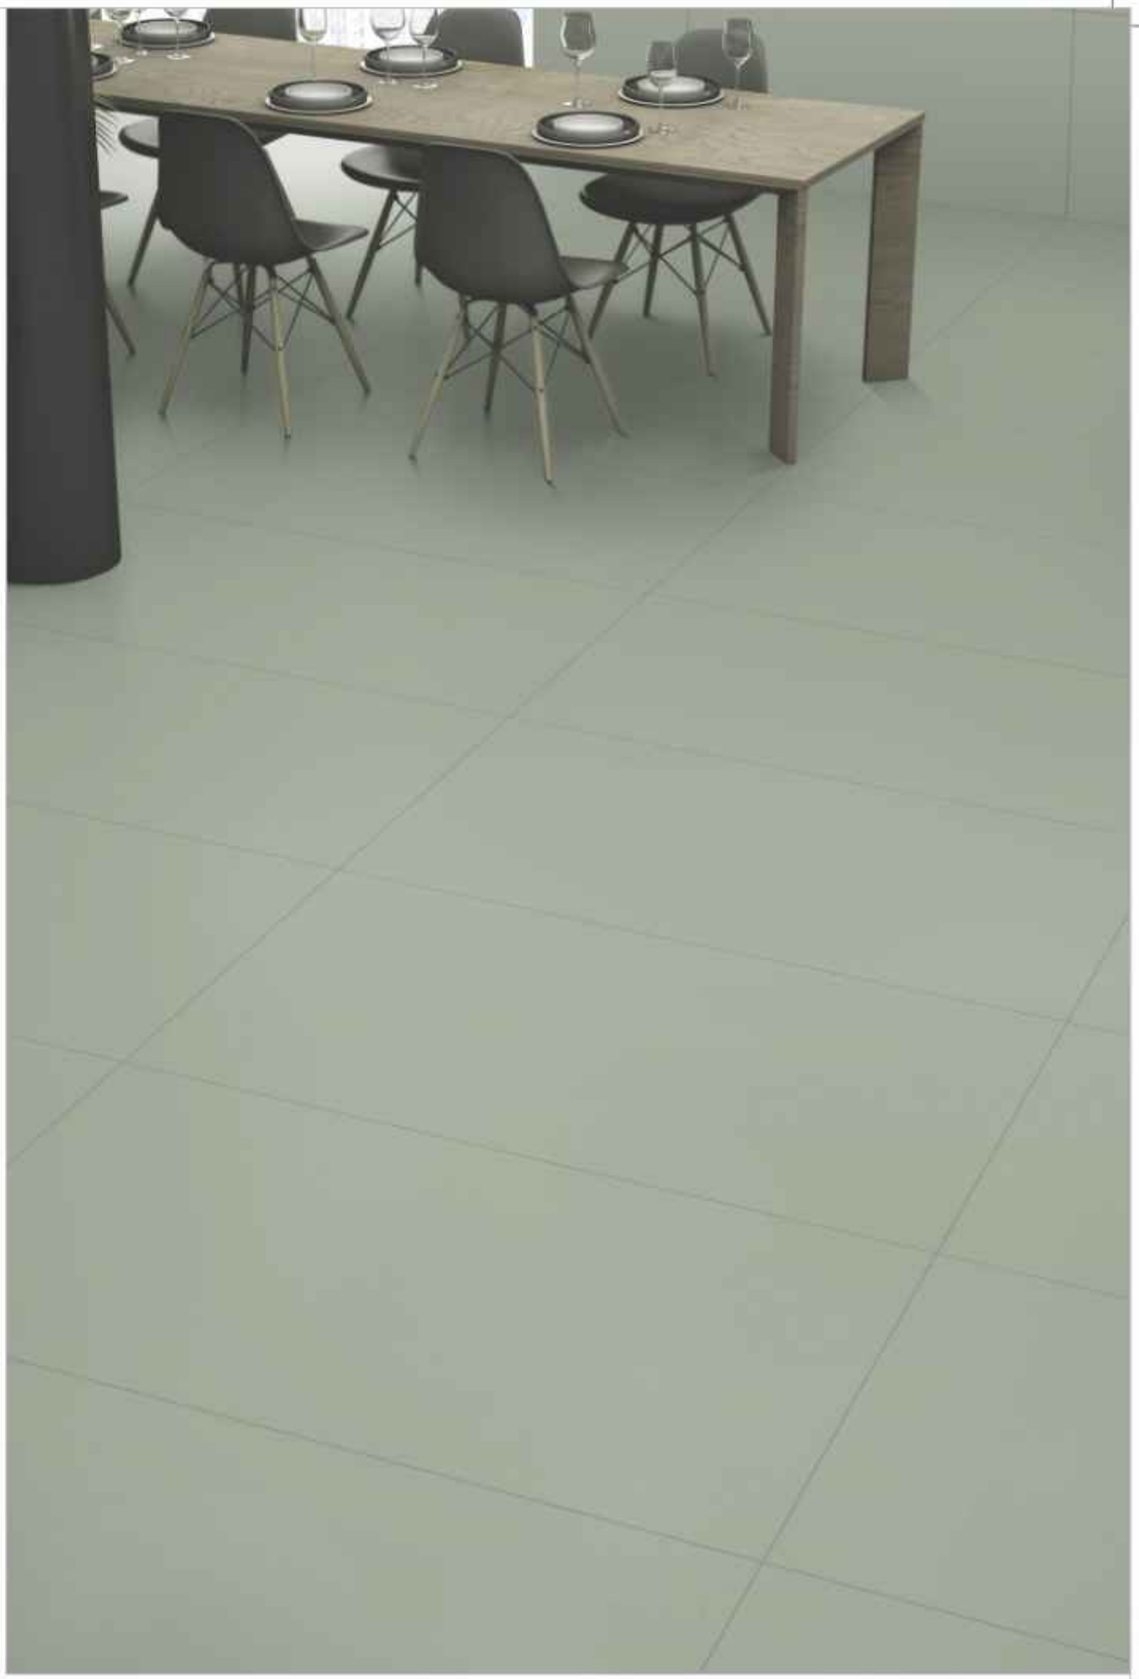

Wall & Floor: **FB DUNE KOTA GREEN MATT** • Dune Collection

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR DUNE COLLECTION				
Nominal Sizes (mm)	Thickness	Avg. Wt. Per Box (Kg.)	No. of Tiles Per Box	Coverage Area Per Box
600x1200mm (Matt)	8.5 mm	26.50 Kgs. / Box (Appx)	2 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft
600x600mm (Matt)	8.5 mm	26.50 Kgs. / Box (Appx)	4 Pcs.	1.44 Sq. Mtr / 15.50 Sq. Ft.

TECHNICAL SPECIFICATION FOR DUNE COLLECTION				
Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method
Dimension & Surface Quality				
Length & Width %	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
Thickness %	± 5.00%	± 5.00%	± 4.0%	
Straightness of Side %	± 0.10%	± 0.50%	± 0.10%	
Rectangularity %	± 0.10%	± 0.60%	± 0.10%	
Surface Flatness				
Center Curvature (%) (Max. Dev.)	± 0.50%	± 0.50%	± 0.2 %	
Edge Curvature (%) (Max. Dev.)	± 0.50%	± 0.50%	± 0.2 %	
Corner Warpage (%)(Max. Dev.)	± 0.50%	± 0.50%	± 0.2 %	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Avr. ≤0.08%, Individual Max.0.1%	Avr. ≤ 0.5 %, Individual 0.6% max	<0.08%, Individual Max 0.1%	IS 13630 Part 2/ ISO 10545-3
Modulus of Rupture [N/mm2]	Avr. 35, Individual 32min	Avr. 35, Individual 32min	Avr. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
Breaking Strength in N	1300	Min.1300	Min 1300	
Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3/ISO-10545-10
Scratch Hardness of Surface (Mohs)	Min 5	N.A	Min 5	IS 13630 Part 13
Coefficient of Linear Thermal Expansion from Ambient Temperature to 100° C	6 X 10^{-6} K^{-1} Max	Test Method Available	Max 6 X 10^{-6} K^{-1} Max	IS 13630 Part 4/ ISO 10545-8
Thermal Shock Resistant	10 Cycle Min	Required	10 Cycle Passed	IS 13630 Part 5/ISO-10545-9
Crazing Resistant	4 Cycle @ 7.5 bar Min	Not Applicable	Not Applicable	IS 13630 Part 9/ISO 10545-11
Impact Resistant as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	0.55 Min	IS 13630 Part 14/ISO 10545-5
Deep Abrastion Resistant	140,Max	Max.175	Max.140	IS 13630 PART 12/ISO 10454-6
Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
Stain & Chemical Resistant (Un-Glazed Tiles)				
Stain Resistant	Min Class 2	Manufacturer to State The Class	Min Class 2	IS 13630 Part 7/ISO 10545-14
Resistant to Household chemicals	Required if Agreed	Min Class UB	Class UB	IS 13630 Part 7/ISO 10545-13
Resistant to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if Agreed	Test Method Available	Class ULB (Low Conc) Class UHB (High Conc)	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code.

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles Used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com