Power of Desire

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump,
B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

Visit us at: www.somanyceramics.com
Find us at: www.facebook.com/SomanyCeramic
Find us at: www.twitter.com/SomanyCeramic
Find us at: www.instagram.com/SomanyCeramics

Available on the App Store
GET IT ON Google play

NEOLLA / CAT / DECEMBER-2024

SOMANY

NEOLLA



HD DIGITAL TILES
COLLECTION

600 x 1200 mm

UNIT - 3

NEOLLA
COLLECTION

Discover the Neolla Collection, featuring an exquisite range of Full Polish, Matt Carving, and Matt Finish tiles, designed to add elegance and style to any space.



SOMANY
NEOLLA

CONTENT

04
FULL POLISH
600x1200mm

28
MATT CARVING
600x1200mm

32
MATT
600x1200mm



APPLICATION

RESIDENCES · HOTELS · OFFICES · BATHROOMS · KITCHENS · RESTAURANTS · SHOPS · AIRPORTS · RAILWAY STATIONS · MALLS



EON AURA STATUARIO FP



EON ANCONA DAINO FP V4



NEW



EON AURA STATUARIO FP V1





EON AURA STATUARIO FP V4



EON CESENA CREMA FP V4



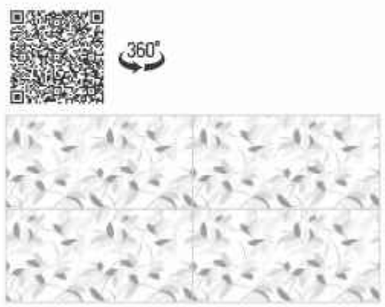

EON CESENA DECOR FP V1





EON CESENA BROWN FP V4



EON ELEGANZA CREMA FP V4





EON ELEGANZA BEIGE DECOR FP V1





EON ELEGANZA BEIGE FP V4



EON ELEGANZA SKY LIGHT FP V4

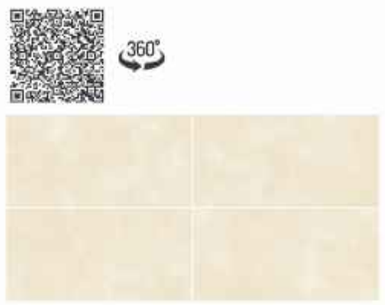



EON ELEGANZA SKY DECOR FP V1

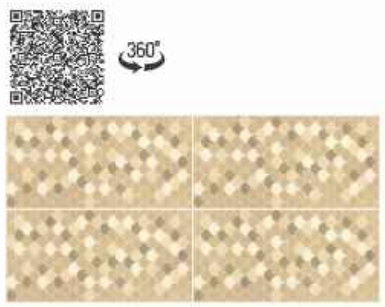



EON ELEGANZA SKY DARK FP V4

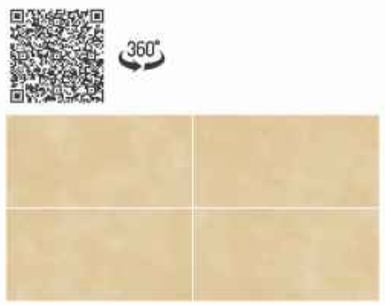


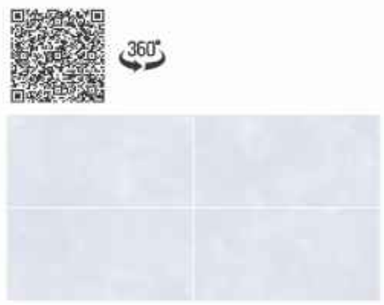
EON ELEGANZA ROSE LIGHT FP V4

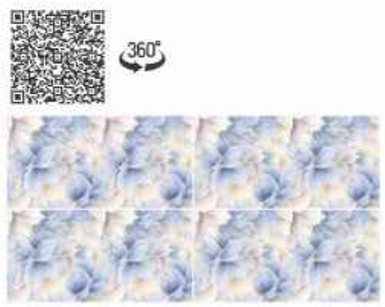



EON ELEGANZA ROSE DECOR FP V1

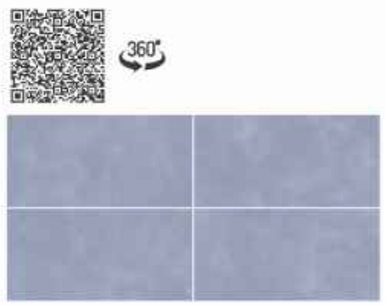



EON ELEGANZA ROSE DARK FP V4



EON ELEGANZA ROSE LIGHT FP V4

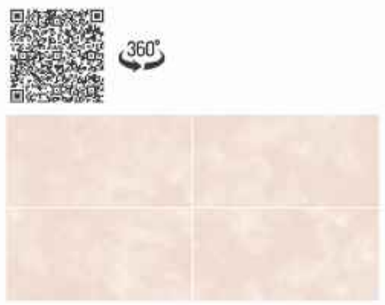

NEW

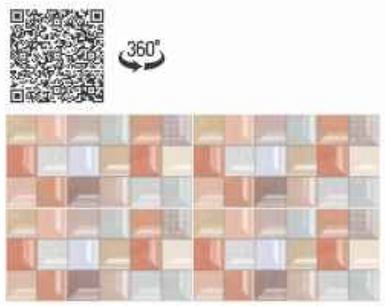

EON ELEGANZA ROSE DÉCOR 02 FP V1

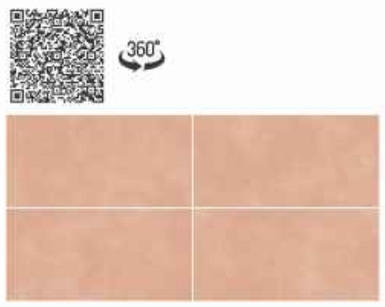



EON ELEGANZA ROSE DARK FP V4

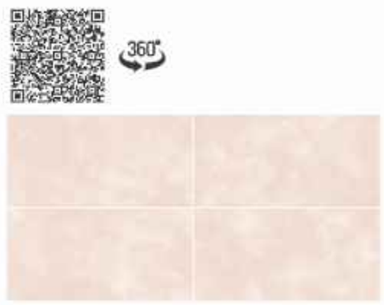



EON ELEGANZA OLIVE DECOR 01, LIGHT & DARK FP

EON ELEGANZA OLIVE LIGHT FP V4



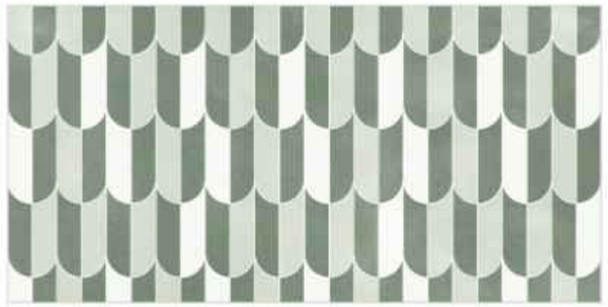

EON ELEGANZA OLIVE DECOR 01 FP V1

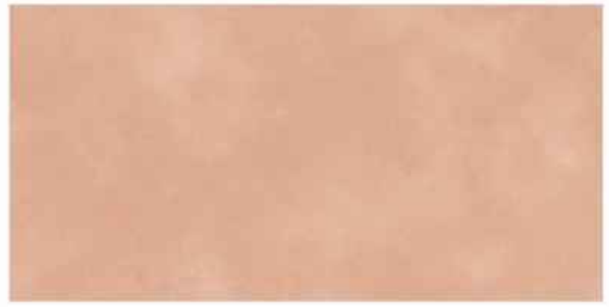


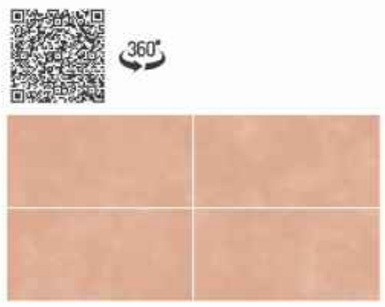
EON ELEGANZA OLIVE DARK FP V4



EON ELEGANZA OLIVE LIGHT FP V4

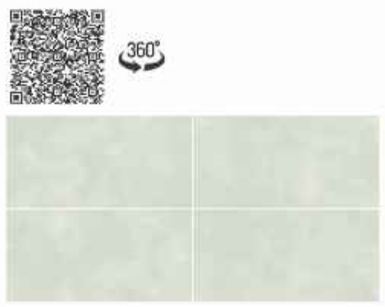



EON ELEGANZA OLIVE DECOR 02 FP V1

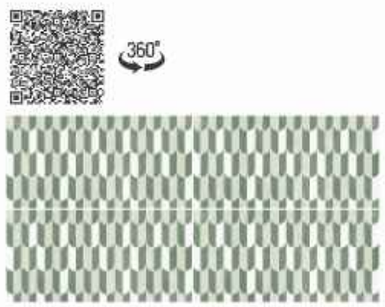



EON ELEGANZA OLIVE DARK FP V4

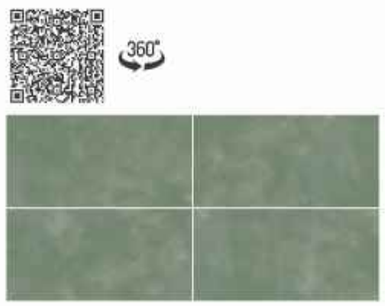

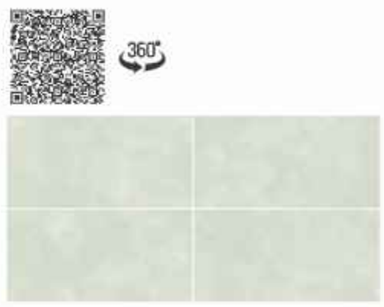EON CAOLINO STATUARIO FP V4



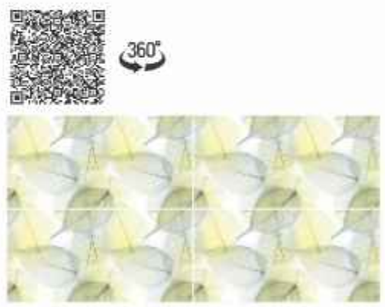

EON ELIT BIANCO FP - ENDLESS V4



EON EVOLIC CREMA FP - ENDLESS V4





EON MALINI GREY LIGHT FP V4



EON KAUNAS STATUARIO FP V4





EON OCEANIC BLUE FP V4





EON RODEN SILVER DECOR & SILVER FP



EON RODEN CREMA DECOR FP V1



EON RODEN CREMA FP - ENDLESS V4

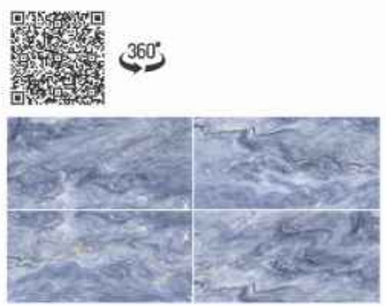



EON RODEN SILVER DECOR FP V1

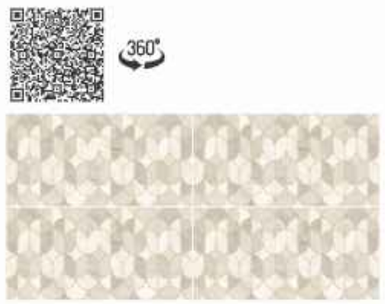



EON RODEN SILVER FP - ENDLESS V4





EON SIGNETIC BROWN FP

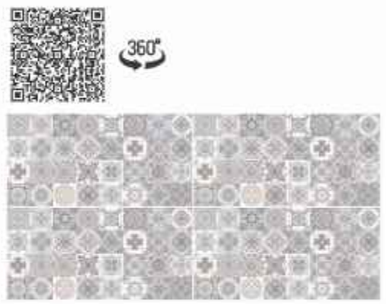

EON SAUVAGE BEIGE FP V4





EON SAUVAGE CREMA FP V4





EON SIGNETIC BROWN FP V4





EON SIGNETIC CREMA FP V4

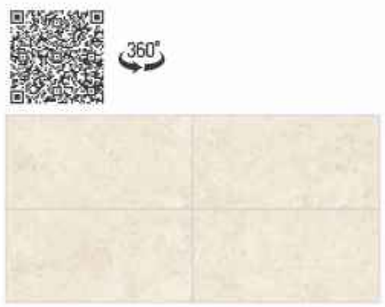



EON SIGNETIC DARK GREY FP V4



EON SIGNETIC LIGHT GREY FP V4

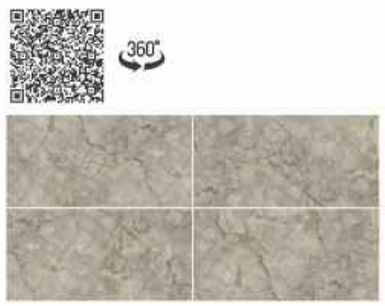

EON SIARA SILVER FP V4

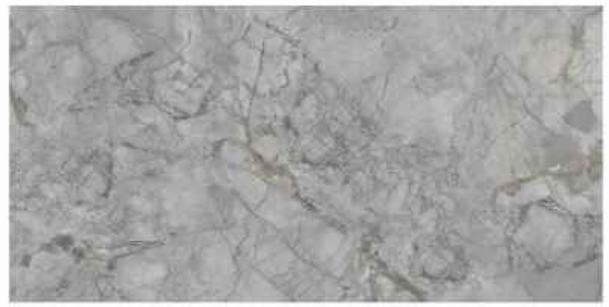

EON SOLESTE GREY FP V4

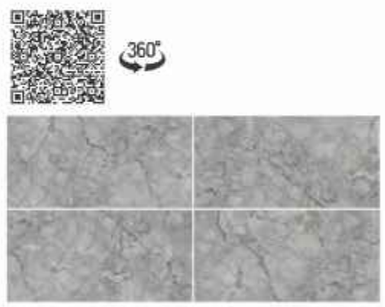



EON SOLESTE NERO FP V4





EON STABIA BROWN FP V4



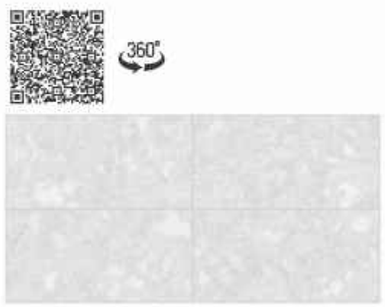

EON STABIA NATURAL FP V4

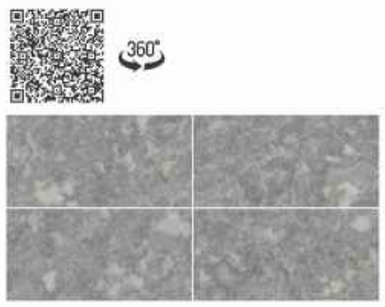



EON WAVE STATUARIO FP V4



EON COSMIC BEIGE CR - ENDLESS



EON COSMIC BEIGE CR - ENDLESS V4



EON DAMIANO GREY CR V4



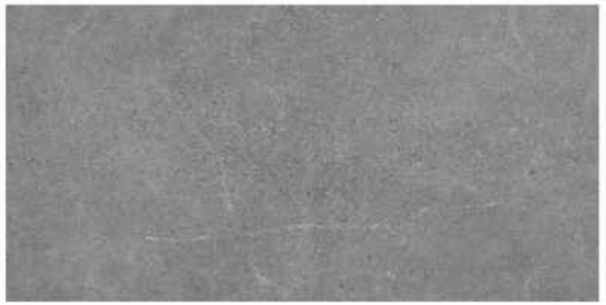

EON DAMIANO NERO CR V4



EON ELEGANCE STATUARIO CR V4





EON TANTALO BROWN CR V4

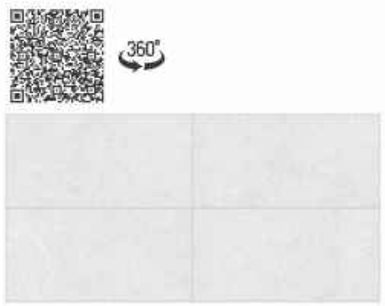

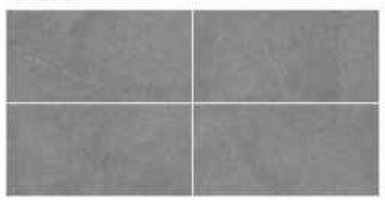

EON TANTALO IVORY CR V4



EON ARPEGGIO DECOR, LIGHT & DARK MATT





EON ARPEGGIO LIGHT MATT V4





EON ARPEGGIO DECOR MATT V1





EON ARPEGGIO DARK MATT V4





EON VERDANT MINT LIGHT MATT V4

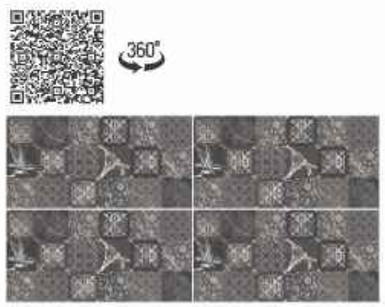



EON VERDANT MINT DECOR MATT V1





EON VERDANT MINT DARK MATT V4



NEW



EON ELEGANZA SKY LIGHT MATT V4

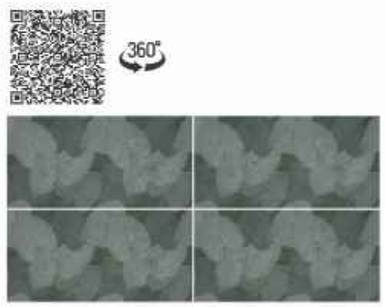360°

NEW

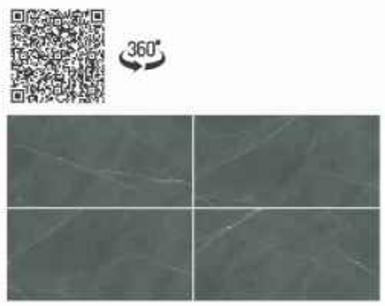

EON ELEGANZA SKY DÉCOR 01 CR V7

360°



NEW



EON ELEGANZA SKY DARK MATT V4

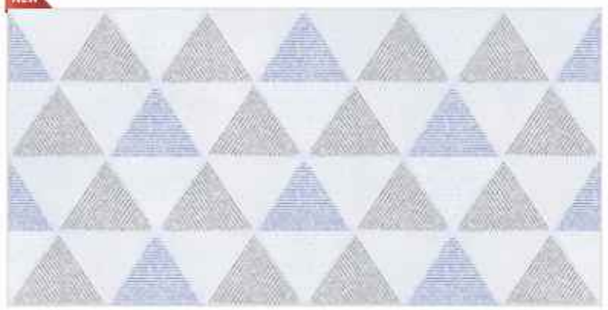360°



NEW

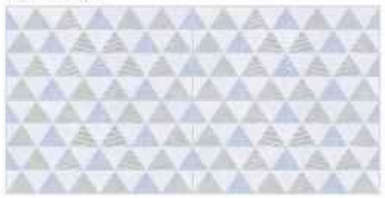

EON ELEGANZA CREMA MATT V6

360°

NEW

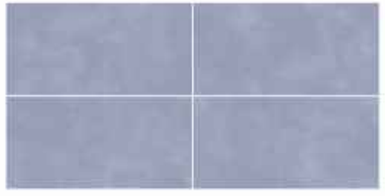

EON ELEGANZA BEIGE DÉCOR 01 CR V7

360°



NEW



EON ELEGANZA BEIGE MATT V4

360°





EON LUMIERE BROWN MATT V4



EON LUMIERE CREMA MATT V4



EON LUMIERE CREMA MATT

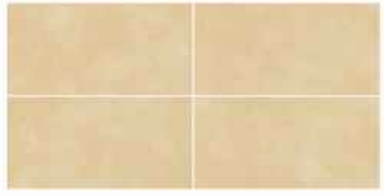DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

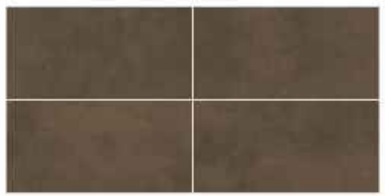Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.



V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation

HD HIGH DEFINITION — High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.
For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

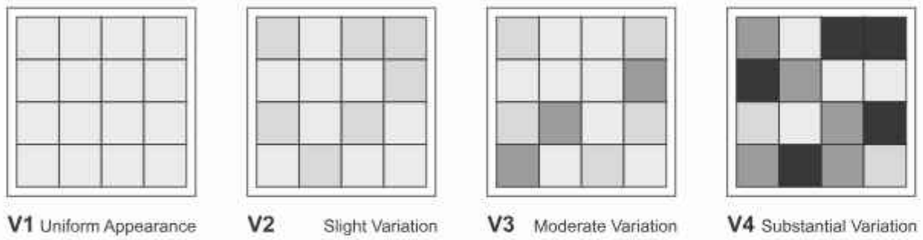SOMANY NEOLLA

PACKING DETAIL FOR 600x1200 mm NEOLLA

Nominal Size	Thickness(mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton
600X1200mm (Eon Series)	8.5	27.5	2	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR 600x1200 mm NEOLLA

	Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group B I b	Requirement as per ISO 13006:2018 0.5 ≤ E ≤ 3% Group B I b	Our Values	Test Method
A	Dimension & Surface Quality				
i	Length & Width	± 0.1%	± 0.3%	± 0.1%	IS 13630 Part 1/ ISO 10545-2
ii	Thickness	± 5.0%	± 5.0%	± 4.0%	
iii	Straightness of Side	± 0.1%	± 0.3%	± 0.1%	
iv	Rectangularity	± 0.1%	± 0.3%	± 0.1%	
v	Surface Flatness				
a	Center Curvature (Max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
b	Edge Curvature (Max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
c	Corner Warpage (Max.Deviation)	± 0.5%	± 0.4%	± 0.2 %	
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B	Physical Properties				
i	Water Absorption	Av 0.08 < E ≤ 3%, Individual 3.3 max	Av 0.5 < E ≤ 3%, Individual 3.3 max	Av E ≤ 3.0 %	IS 13630 Part 2/ ISO 10545-3
ii	Modulus of Rupture [N/mm²]	Avg. 30, Individual 27 Min	Avg. 30, Individual 27 Min	Avg. > 30	IS 13630 Part 6/ISO 10545-4
iii	Breaking Strength in N	Min. 1100	Min. 1100	Min. 1100	
iv	Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
v	Scratch Hardness of Surface (Mohs)	Min 5	N A	Min.5 (for Matt, Carving), Min.3 (for Polished)	IS 13630 Part 13
vi	Resistance to Abrasion of Glazed Tiles (Class I to V)	Min II	Abrasion Class & Cycle passed	Class-IV(for Matt, Carving), Class-III(for Polished)	IS 13630 Part 11 /ISO 10545-7
vii	Coefficient of Linear Thermal Expansion from Ambient Temperature to 100 0 C	7 X 10^{-6} K^{-1} max	Test Method Available	Max 6 X 10^{-6} K^{-1} max	IS 13630 Part 4/ ISO 10545-8
viii	Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix	Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x	Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	Min 0.55	IS 13630 Part 14/ISO 10545-5
xi	Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C	Chemical Resistance (Glazed Tiles)				
i	Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt, Carving), Min Class-2(for Polished)	IS 13630 Part 8 &ISO 10545-14
ii	Resistance to Household Chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii	Resistance to Acids and Alkalis (with exception of Hydrofluoric Acid and its compounds)	Required if agreed	Declared Value[1]	Min Class AA	

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Giza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorado Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com