DURAGRES

ROCKSTONE
collection

600 x 600mm

SOMANY

NEW ARRIVAL
—
JAN 2026

UNIT 01



RANGE VOL 1 | JAN 2026

UNIT 01

SOMANY

Somany Ceramics Limited
Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh, Ph: 0120-4627900
Ahmedabad Office: 601 - 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad- 382481; Ph: 079-27661103 & 04.
Registered Office: 2, Red Cross Place, Kolkata- 700001; Ph: 033-22487406/5913
www.somanyceramics.com | E-mail: customer.care@somanyceramics.com

Toll Free No.: 1800-103-0004 (Timing: 10:00 am - 6:30 pm; Mon - Fri)

DURAGRES / ROCKSTONE / CATALOGUE / JAN 2026


Rugged Grandeur, Timeless Tactility

ROCKSTONE
collection

In the quietude of stone lies centuries of strength, weathered by time yet unyielding in spirit. The Rockstone collection channels the rugged splendour of stone, capturing nature's primal essence where surfaces whisper stories of geological grandeur: textured with rustic character.

The 600x600mm format empowers Rockstone to unlock design possibilities across diverse spatial narratives, spanning indoor and outdoor realms. The Rustic finish delivers tactile, weathered character with pronounced texture that defines its authentic appeal. Subtle surface variations mirror the organic irregularities of natural stone formations, while versatile shades harmonise effortlessly with any decor style, whether contemporary, traditional, or timelessly classic. Rockstone anchors sun-drenched terraces, bustling parking areas, and balconies with weather-resistant durability, while bringing raw authenticity to your spaces with its timeless soul.



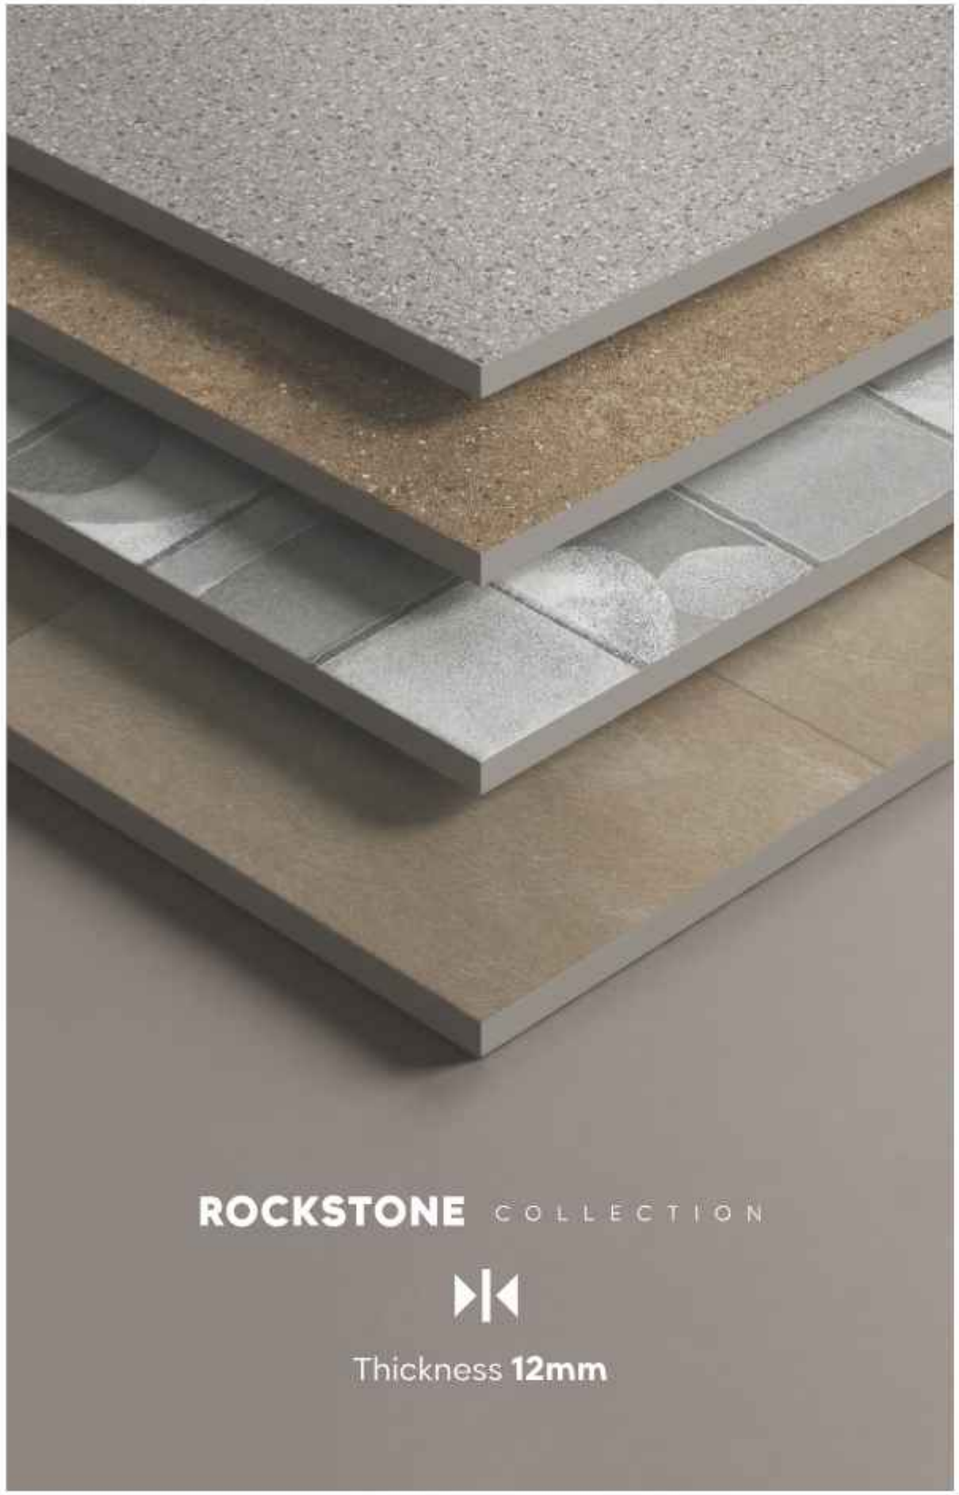

ROCKSTONE COLLECTION

Thickness **12mm**

TECHNICAL FEATURES

- Water Repellent
- Blended Smoothness
- Non-Reflective
- Easy to Clean
- Abrasion and Wear-Resistant
- Hygienic Surface
- Thermal Resistant
- Frost Resistant
- Load and Stress-Resistant
- Chemical Resistant
- Temperature Resistant

APPLICATION AREAS

- Residential Areas
- Commercial Areas
- Hospitals
- Shops and Malls
- Hotels and Restaurants
- Schools and Colleges
- Outdoor Furniture
- Public Places



ROCKSTONE COLLECTION

Tile Shown: **ROCKSTONE PETRA COTTO**

Size
600x600mm

Surface
Rustic

Thickness
12mm

12mm Thickness



ROCKSTONE PETRA SILVER

V3

Size	Surface	Thickness
600x600mm	Rustic	12mm



ROCKSTONE PETRA ASHEN

V3

Size	Surface	Thickness
600x600mm	Rustic	12mm





ROCKSTONE PETRA NERO

V3

Size	Surface	Thickness
600x600mm	Rustic	12mm



ROCKSTONE PETRA COTTO

V3

Size	Surface	Thickness
600x600mm	Rustic	12mm





ROCKSTONE COLLECTION

Tiles Shown: ROCKSTONE KRONIO SILVER
ROCKSTONE KRONIO SMOKY

Size
600x600mm

Surface
Rustic

Thickness
12mm

12mm Thickness

ROCKSTONE KRONIO SILVER

V4

Size 600x600mm | Surface Rustic | Thickness 12mm



ROCKSTONE KRONIO SMOKY

V4

Size 600x600mm | Surface Rustic | Thickness 12mm






ROCKSTONE KRONIO COTTO

V4

Size 600x600mm | Surface Rustic | Thickness 12mm

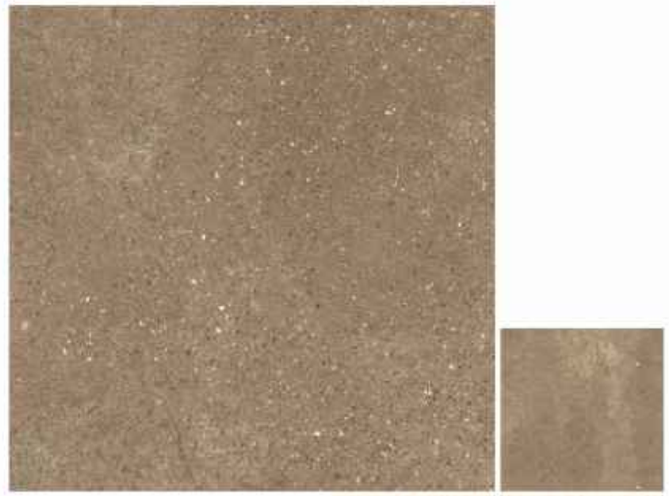


ROCKSTONE LIZON COTTO

V4

Size 600x600mm | Surface Rustic | Thickness 12mm



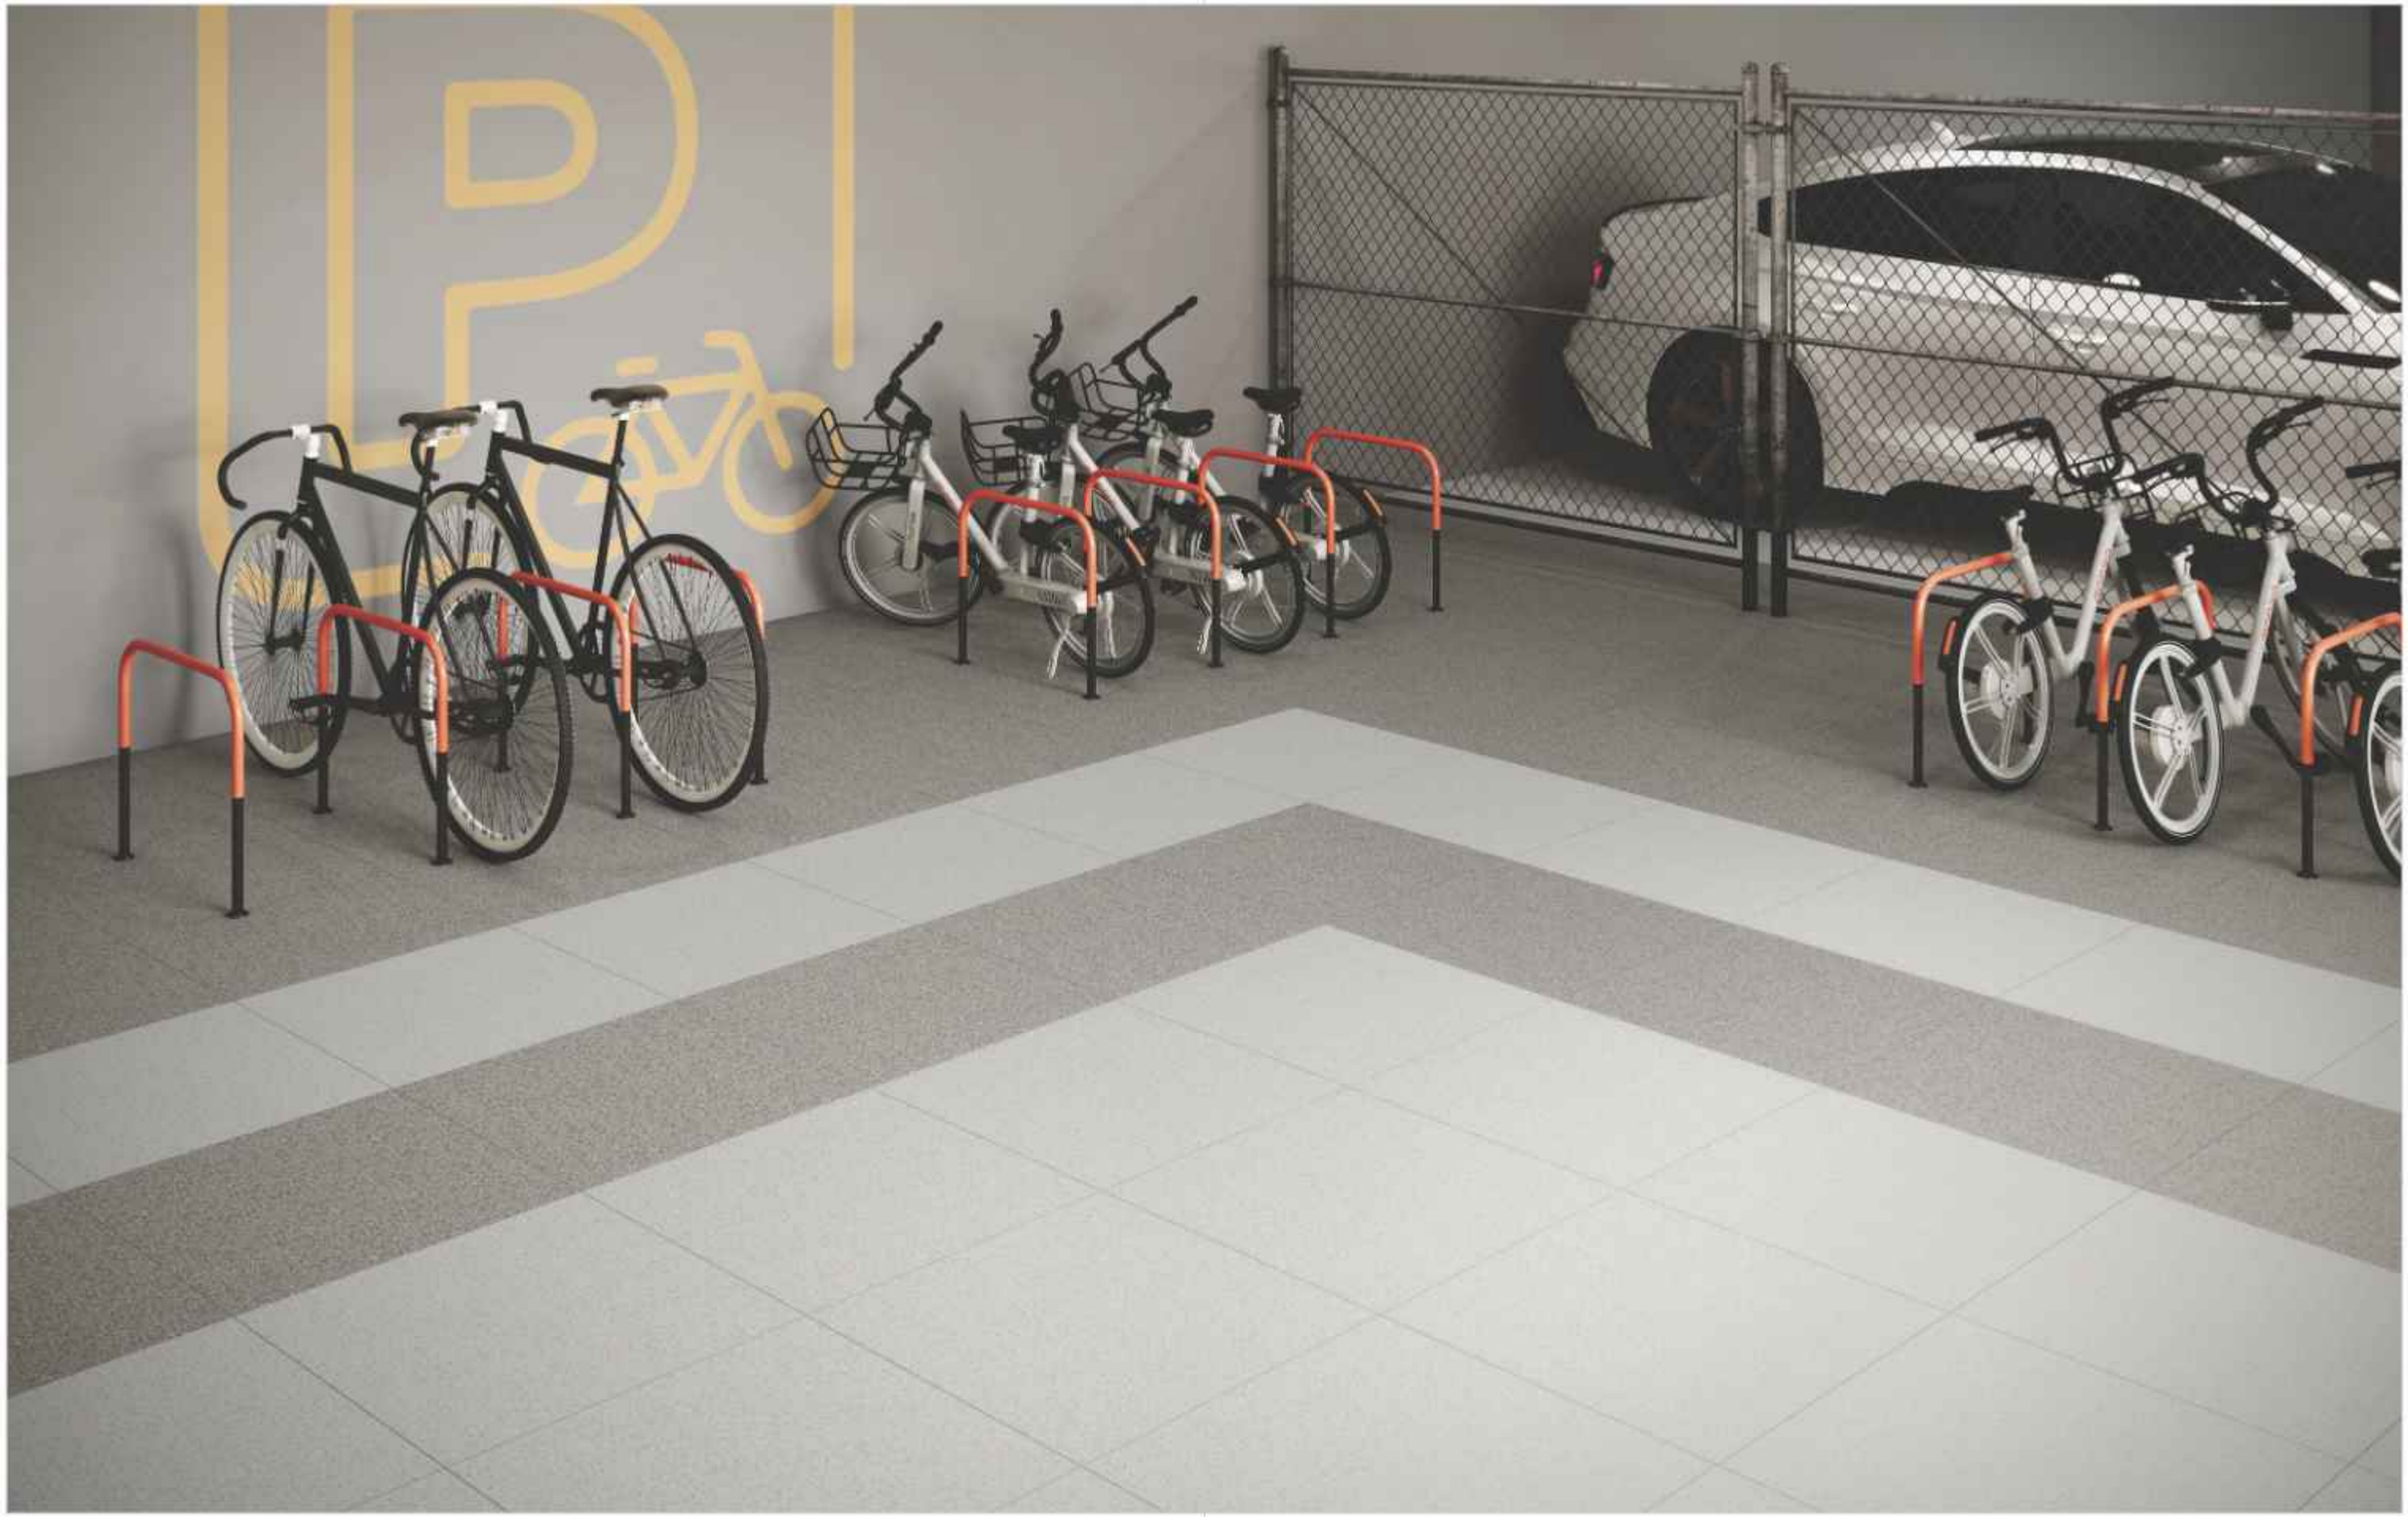

ROCKSTONE COLLECTION

Tile Shown: ROCKSTONE VISO SILVER
ROCKSTONE VISO ASHEN

Size
600x600mm

Surface
Rustic

Thickness
12mm

12mm Thickness









ROCKSTONE LIZON SILVER
V4

Size	Surface	Thickness
600x600mm	Rustic	12mm










ROCKSTONE LIZON ASHEN
V4

Size	Surface	Thickness
600x600mm	Rustic	12mm

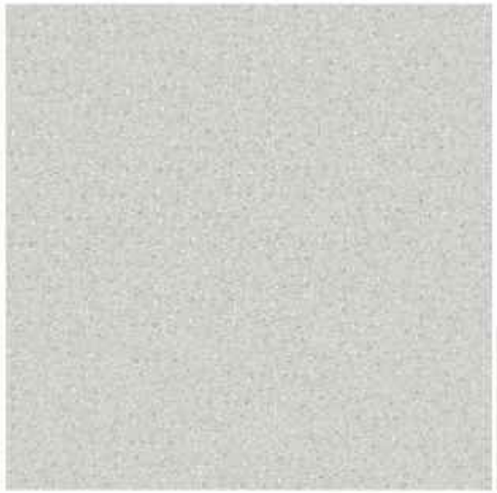

ROCKSTONE VISO SILVER
V1

Size	Surface	Thickness
600x600mm	Rustic	12mm









ROCKSTONE VISO ASHEN
V1

Size	Surface	Thickness
600x600mm	Rustic	12mm



ROCKSTONE COLLECTION


Tile Shown: **ROCKSTONE CAJA NATURAL**

Size
600x600mm

Surface
Rustic

Thickness
12mm

12mm Thickness

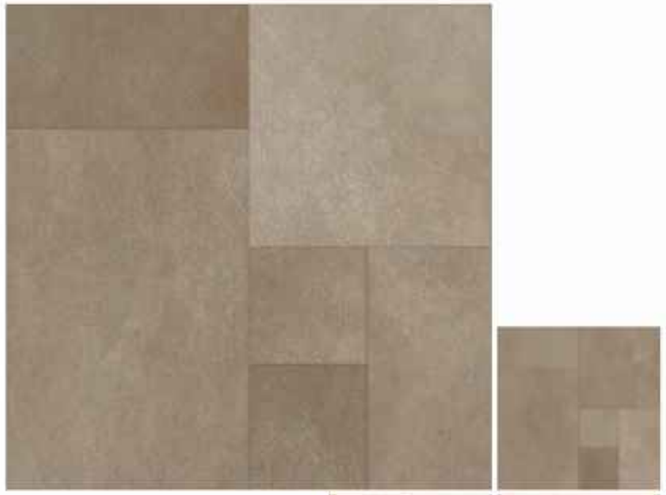


ROCKSTONE CAJA CARAMEL

V4

Size 600x600mm | Surface Rustic | Thickness 12mm



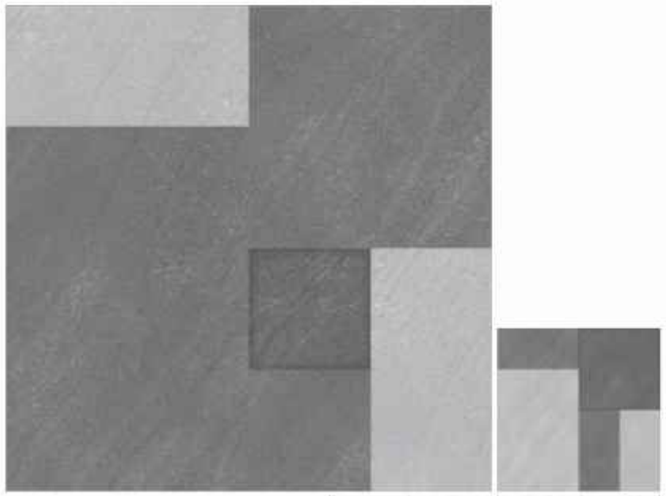


ROCKSTONE CAJA NERO

V4

Size 600x600mm | Surface Rustic | Thickness 12mm








ROCKSTONE CAJA NATURAL

V4

Size 600x600mm | Surface Rustic | Thickness 12mm



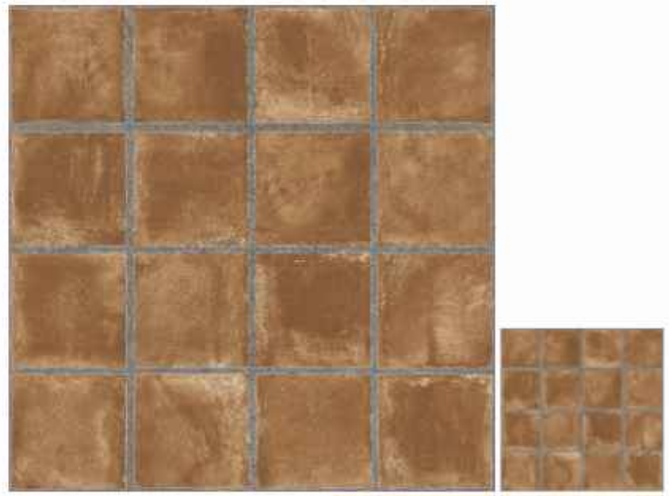

ROCKSTONE ARCA COTTO

V1

Size 600x600mm | Surface Rustic | Thickness 12mm







ROCKSTONE COLLECTION

Tile Shown: ROCKSTONE ARCA SMOKY DECOR
ROCKSTONE ARCA SMOKY


Size
600x600mm

Surface
Rustic


Thickness
12mm

12mm Thickness












ROCKSTONE ARCA
SMOKY DECOR
V3

Size	Surface	Thickness
600x600mm	Rustic	12mm

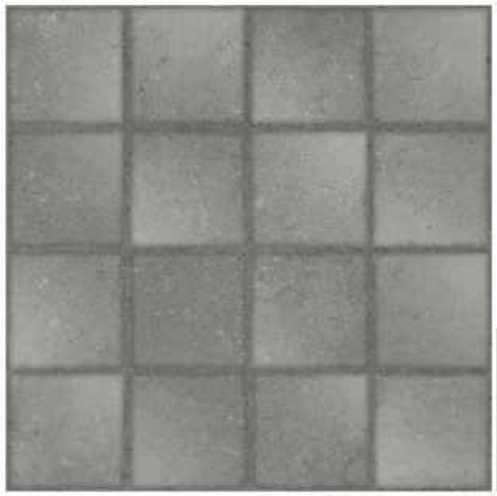









ROCKSTONE ARCA SMOKY
V3

Size	Surface	Thickness
600x600mm	Rustic	12mm

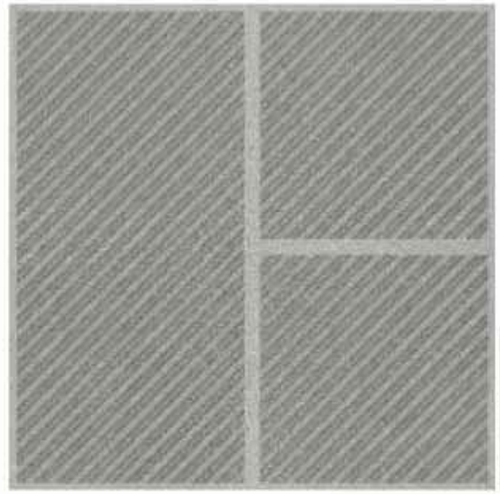








ROCKSTONE FILA ASHEN
V1

Size	Surface	Thickness
600x600mm	Rustic	12mm

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles resemble and look authentically like natural materials (Stone, Wood, Fabric).

Recognising this situation, it is necessary to be informed of the grade of design & pattern variation that is expected from these products. As a general guide, the design & pattern guide given below classifies the range according to the degree of variation.

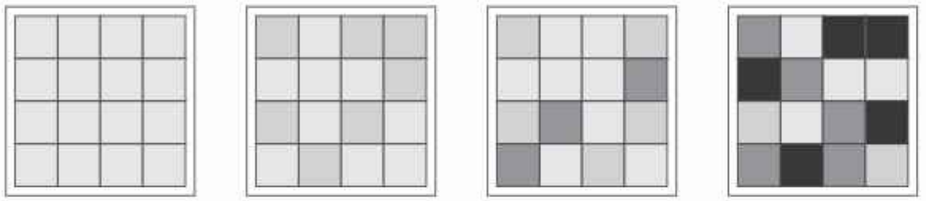

V1 Minimal Variation **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follows:

V1 Minimal Variation V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

TECHNICAL SPECIFICATION

PACKAGING DETAIL FOR ROCKSTONE COLLECTION				
Nominal Size (mm)	Thickness (mm)	Avg. Wt. Per Carton (Kg.)	No. of Tiles Per Carton	Coverage Area Per Carton
600x600mm	12.0 mm	28.0 kgs	3	1.085q. mtr / 11.62 Sq. ft.

TECHNICAL SPECIFICATION FOR ROCKSTONE COLLECTION				
Characteristics	Requirement as per IS 15622:2017 E≤0.08 Group BIa	Requirement as per ISO 13006 ≤ 0.5% Group BIa (Annex G)	Our Value	Test Method
(A) Dimension & Surface Quality				IS 13630 Part 1 / ISO 10545-2
i) Length & Width	±0.1%	± 0.3%	±0.1%	
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	±0.1%	± 0.3%	± 0.1%	
iv) Rectangularity	±0.1%	± 0.3%	± 0.1%	
v) Surface Flatness				
a) Center Curvature (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
b) Edge Curvature (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
c) Corner Warpage (%) (Max. Deviation)	± 0.5 %	± 0.4%	±0.2%	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Avg. E ≤ 0.08% , Individual 0.1 Max	Avg. ≤ 0.5% , Individual 0.6% Max	Avg. 0.08%	IS 13630 Part 2 / ISO 10545-3
ii) Modulus of Rupture (N/mm2)	Avg. 35 , Individual 32 Min	Avg. 35 , Individual 32 Min	Avg. 40	IS 13630 Part 6 / ISO 10545-4
iii) Breaking Strength in N	Min. 1300	Min 1300	Min 3000	
iv) Moisture Expansion in mm/m	0.02	Test Method Available	Max 0.02	IS 13630 Part 3 / ISO-10545-10
v) Scratch Hardness of Surface (Mohs)	Min 5	NA	4-6 (Depend on Surface)	IS 13630 Part 13
vi) Resistant to Abrasion of Glazed Tiles (Class I to V)	Min II	Report Abrasion Class and Cycle Passed	Depend on Glazed Surface	IS 13630 Part 11 / ISO 10545-7
vii) Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C	6X 10⁻⁶K⁻¹ Max	Test Method Available	5X 10-6 °K⁻¹ Max	IS 13630 Part 4 / ISO 10545-8
viii) Thermal Resistant	10 Cycle Min	Test Method Available	10 Cycle Passed	IS 13630 Part 5 / ISO-10545-9
ix) Crazing Resistant	4 Cycle @ 7.5bar Min	Required	4 Cycle Passed	IS 13630 Part 9 / ISO 10545-11
x) Impact Resistant as Coefficient of Restitution (COR)	0.55 Min	Test Method Available	0.75-0.95	IS 13630 Part 14 / ISO 10545-5
xi) Bulk Density (gm/cc)	2.2	NA	2.3	SO-10545-2
x) Coefficient of Friction	Where Required Manufacturer to	Where Required Manufacturer to	Depend on Glazed Surface	ISO 10545-17
xi) Frost Resistant	Required	Required	100 Cycle Passed	IS 13630 Part 10 / ISO-10545-12
C) Chemical Resistant (Glazed Tiles)				
i) Stain Resistant	Min Class-1	Min. Class 3	Min Class 1 / Class 3	IS 13630 Part 8 / ISO 10545-14
ii) Resistant to Household Chemicals	Min Class AA	Min. Class B	Min Class AA	IS 13630 Part 9 / ISO 10545-13
iii) Resistant to Acids and Alkalis (With exception of Hydrafluoric Acid and its Compounds)	Required if Agreed	Manufacturer is to State Classification	Min Class AA	

The tiles in this catalogue are reproduced using four-colour printing, and the tiles may not be displayed in accurate sizes. Therefore, we strongly recommend customers to check the physical samples before placing an order. The "Technical Specification" applies exclusively to premium-quality Somany wall and floor tiles. Please inspect the tiles thoroughly before installation, as we don't accept any complaints once the tiles have been applied or fixed. Additionally, complaints regarding borders, highlighters, or motifs will not be entertained after purchase.

NOTE

TILE VISUALISER

SOMANY



Choosing the perfect tile for your dream home should be exciting, not overwhelming! With endless styles, colours, and finishes to explore, how do you ensure your choice truly brings your vision to life? That's where our Tile Visualiser transforms the experience. From the **intuitive 2D Studio Visualiser to the immersive Panoramic-Studio Visualiser,** and even the AI-powered Your-Space-Studio Visualiser, you get a seamless, real-world preview of your selections. Instantly see how different tiles look in your space and make confident design decisions—because what you see is exactly what you'll get.

Your dream tile? Just a click away.

Toll Free: 1800-103-0004 | www.somanyceramics.com

SOMANY Ezy Fix

Tile Adhesive | Epoxy Grout | Cement Polymer Grout | PU Adhesive | Grout Admix | Tile Cleaner



Lasting Bonds Made Ezy

Behind Every Stunning Tile, there's a Stronger Bond!
Experience the power of reliable tiling with Somany Ezy Fix. From ceramic and porcelain tiles to natural stone and marble, our adhesives work on all surfaces – walls, floors, indoors, outdoors, and facades. Available in cement-based and PU-based options, they offer strong adhesion across all sizes and materials. Complementing this, our cement and epoxy grouts ensure tight, durable joints that last. No matter the project, Somany Ezy Fix delivers a bond that's built to last.

For detailed instructions scan the QR code.

EASY TO USE

HIGH STRENGTH POLYMER FORTIFIED ADHESIVE

WIDE APPLICATION RANGE

HIGHLY FLEXIBLE

SUITABLE FOR WET WALL SURFACES

SELF - CURING ADHESIVE

SUITABLE FOR TILE ON TILE APPLICATION

To know more visit at www.somanyceramics.com or call on Toll Free: 1800 103 0004

SOMANY Bathware

SOMANY French Collection



Water Closet : Jazz Plus Wall Hung | Shower control : Elysees Single Lever Diverter and Wall Spout Chrome | Shower : Diamante Overhead Shower with arm Chrome
Allied Products : Grace Health Faucet and Soza Paper Holder Chrome | Tiles used - Wall & Floor Area : Lumiere Beige 180 Engravo MT | Shower Area : Colorato Bianco 180 Grit



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Toll Free: 1800-103-0004 | www.somanyceramics.com